

MOTORS

5 SERIES UNIT BEARING WATT MOTORS


FEATURES:

- Cast iron construction
- 26" minimum leads
- Continuous air over
- Overload protection
- All angle operation
- Quiet operation
- Improved permanent lubrication
- 50 / 60 hz
- Sleeve bearings
- Side pad mounting
- Operating temp: 32°F - 104°F (0°C - 40°C)
- Thermal protection
- UL recognized

OPERATING TEMP
32°F - 104°F
(0° - 40°C)

CAST IRON
CONSTRUCTION

SE5411

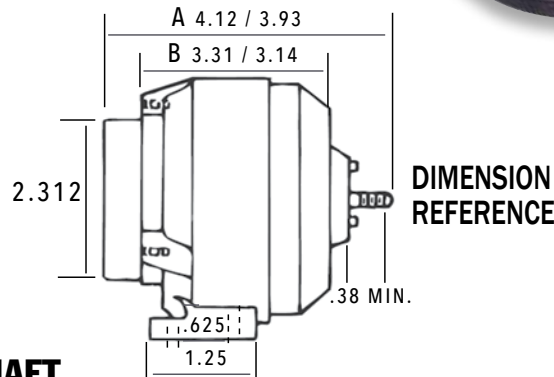

1550 RPM 1/4 -020 THREADED SHAFT



PART NO	WATTS	VOLTS	RPM	AMPS	LEAD LENGTH	ROTATION
SE5109	2	115	1550	0.26	26"	CW
SE5211	4	115	1550	0.27	26"	CW
SE5212	4	115	1550	0.27	26"	CCW
SE5221	4	230	1550	0.16	26"	CW
SE5222	4	230	1550	0.16	26"	CCW
SE5311	6	115	1550	0.4	26"	CW
SE5312	6	115	1550	0.4	26"	CCW
SE5411	9	115	1550	0.5	26"	CW
SE5412	9	115	1550	0.5	26"	CCW
SE5421	9	230	1550	0.25	26"	CW
SE5422	9	230	1550	0.25	26"	CCW
SE5811	16	115	1550	1.00	24"	CW
SE5812	16	115	1550	1.00	24"	CCW
SE5821	16	230	1550	0.50	24"	CW
SE5822	16	230	1550	0.50	24"	CCW

