

McDonnell & Miller GuardDog®

RB-24E Low Water Cut-Off

Good Dog.



Patented Self-Cleaning Probe

Minimizes scale build-up and extends recommended cleaning interval to 5 years.

Brass Threads

Metal-to-metal seal ensures a leak-free installation.

Wrench Flats

Easily and quickly installs in any hydronic system.

Plug & Play Installation

Universal wiring harness fits any gas boiler. "Plug & Play" harnesses available for most residential boilers.

Push-to-Test Button

Enables low water cut-off protection to be verified without draining any part of the system.



McDonnell & Miller
a xylem brand

RB-24E Low Water Cut-Off


Electrical Ratings

Voltage Power	Consumption	Load Switching
24 VAC	2.5 VA	2 A at 24 VAC

Note: A 15mA minimum current draw is required.

Dimensions, in. (mm)

A NPT	B	C	D	E
3/4	1 3/16 (30.2)	1 3/16 (30.2)	5 3/4 (146)	1 7/8 (47.6)




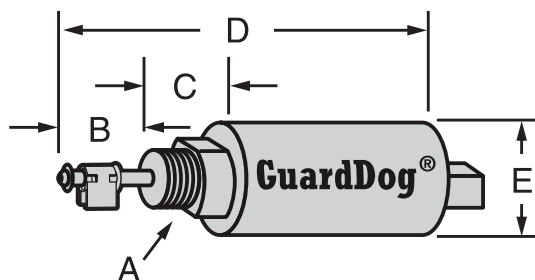


Ordering Information

Model Number	Part Number	Description
RB-24E	144692	Residential LWCO
RB-24E-A	144694	Residential LWCO w/vent damper harness
RB-24E-S	144693	Residential LWCO w/control board harness
RB-24E-L	144690	Residential LWCO w/burner control harness
RB-24E-B	144696	Residential LWCO w/burner control harness
UWH-RB-24A	144681	Replacement cable for RB-24E-A
UHW-RB-24S	144682	Replacement cable for RB-24E-S
UHW-RB-24L	144691	Replacement cable for RB-24E-L
UHW-RB-24B	144695	Replacement cable for RB-24E-B

Boiler Controls

- Brass threads enable a secure and trouble-free installation
- Test button to quickly confirm proper operation
- Universal wiring harness fits 100% of today's gas boilers
- -S, -A, -L and -B models provide "plug & play" installation with most residential boilers
- Compact size
- Easy to install and wire
- Automatic reset feature resumes operations after a power outage when water is on probe
- Green LED indicating power on
- Red LED indicating low water condition
- Solid state operation
- 15,000 ohms probe sensitivity
- Maximum ambient temperature 120°F (49°C)
- Maximum water temperature 250°F (121°C)
- Maximum water pressure of 160 psi (11 kg/cm³)

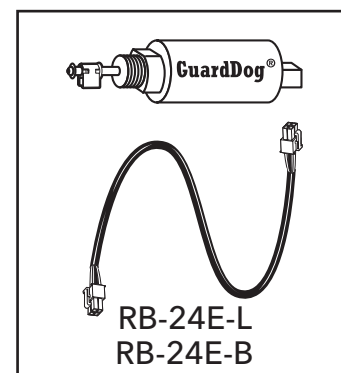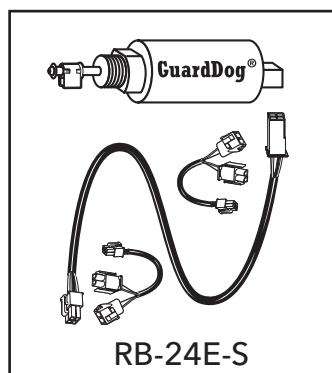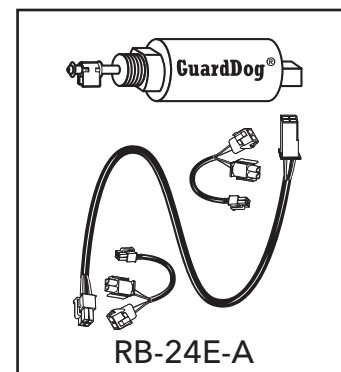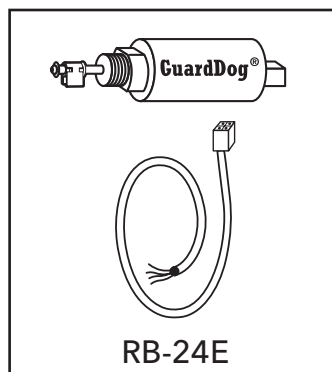

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, Illinois 60053
Phone: (847) 966-3700
Fax: (847) 965-8379
www.mcdonnellmiller.com

McDonnell & Miller is a trademark of Xylem Inc. or one of its subsidiaries.
© 2016 Xylem Inc. MM-288C February 2016