

## Heat Motor Zone Valves

Taco Heat Motor Zone Valves provide a convenient way to create individual zones or equipment isolation in a hydronic heating system. Utilizing one pump along with multiple zone valves, flow can be started, stopped, or diverted through the system to provide individual room or area comfort control and energy savings. Taco offers many versions and sizes of the Heat Motor Zone Valve to meet all your zone valve needs.

### Choosing The Right Valve...

#### Geothermal Valves (Models 5101G, 556G, 557G)

Designed for high head, open system zone control. The unique end switch design permits control of the heat pump by the valve. This allows movement of cold water into the coil before the heat pump actually starts.



#### Available Models— Geothermal

Model #	Description
556-G2	3/4" Sweat Zone Valve 2-Way
557-G3	1" Sweat Zone Valve 2-Way
5101-G2	3/4" NPT Zone Valve 2-Way
555-173RP	Power Unit For Geothermal Valves

#### 560 Series (560, 561, 562)

A 3-Way bypass version of the 570 Gold Series. This valve is used to control the flow to a fan coil or terminal heating unit.



#### Available Models— 560

Model #	Description
561-5	3/4" Sweat Zone Valve 3-Way
562-5	1" Sweat Zone Valve 3-Way
555-154RP	Power Unit For 560 Zone Valves (-4 & -5)
555-151RP	Power Unit For 560 Zone Valves (-2 & -3)

#### 570 Gold Series (570, 571, 572, 572)

The Gold Series is the industry standard for hydronic heating applications. The quiet and dependable operation has made this valve an industry leader for decades. The manual open lever and twist off head makes installation and service easy.




#### Available Models— 570

Model #	Description
571-2	3/4" Sweat Zone Valve 2-Way
572-2	1" Sweat Zone Valve 2-Way
573-2	1-1/4" Sweat Zone Valve 2-Way
555-050RP	Power Unit For 570 Series Valves

### Features

- Proven performance – millions in use  
Taco Zone Valves are the industry's top choice for consistent performance
- Rugged dependability
- Silent operation
- Twist off head
- Bellows or Globe Valve Construction ensures positive shut-off and leak proof operation
- Patented construction
- Easy to install
- Manual open (bypass) lever
- 24 VAC powered with isolated end switch
- 100% factory tested
- Made in the USA
- 3 year head, 5 year body warranty

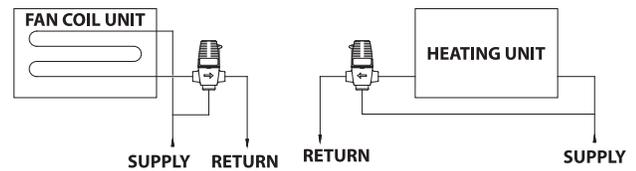

560 Series (3-Way Valve Piping)

### Zone Valve Operation and Wiring

