

ENGINEERING
TOMORROW



Quick Select Guide—2023

Products and technologies for all your
application needs, today and **tomorrow**

REFRIGERATION & AIR CONDITIONING COMPONENTS

Easy

Find the right
products fast with
our Quick Select
Guide



@Danfoss_NA



Danfoss North America



DanfossNorthAmerica

choose.danfoss.com

Table of Contents


Thermostatic Expansion Valves	5
T2 / TE2 - Thermostatic Expansion Valves and Kits	5
TUA/TUAE - Thermostatic Expansion Valves and Kits	9
TUA - Thermostatic Expansion Valves for Ice Machines	13
TR6 - Thermostatic Expansion Valves and Kits	15
TGE - Thermostatic Expansion Valves	17
TD1/TDE1 - Thermostatic Expansion Valves	19
 Thermostats and Pressure Switches	 21
AK-RC 251 - Optyma™ Control for walk-in coolers and freezers	21
ERC 213 - Electronic Temperature Control	22
Universal Service Thermostat	23
KPU 19 - Thermostats	25
KPU 60/70 - Thermostats	27
KPU - Pressure Switches	29
MP - Differential Pressure Switch / Lube Oil Protection Switch	31
 Solenoid Valves	 33
EVR Version 2 - Solenoid Valves	33
Coils for Solenoid Valves	33
 Pressure Controlled Water Valves	 35
WVFX - Pressure Controlled Water Valves	35
 Pressure Regulators	 37
KVP - Evaporating Pressure Regulators	37
KVL - Crankcase Pressure Regulators	37
KVR - Condensing Pressure Regulator	37
NRD - Differential Pressure Regulators	37
KVC - Hot Gas Bypass Pressure Regulators	37
CPCE - Hot Gas Bypass Pressure Regulators	37
 Filter Driers	 39
DCL - Liquid Line Filter Driers	39
DCB - Bi-flow Filter Driers	39
DAS - Suction Line Filter Driers	39
DCR - Filter Drier Cores	39
DCL with Schrader Valve - Filter Driers	41

Ball Valves	42
GBC V2 - Ball Valves	42
Check Valves	43
NRV V2 - Check Valves	43
Sight Glasses	44
SGP - Sight Glasses	44
Light Commercial Compressors	45
Light Commercial Compressors	45
Condensing Units	48
Optyma™ - Condensing Units	48
Optyma™ Slim - Outdoor Condensing Units	56
Unit Coolers	67
Optyma™ Cooler - Walk-in Cooler and Freezer Unit Coolers	67
Scroll Compressors	69
MT / MTZ - Medium/High Temperature Scroll Compressors	69
NTZ - Low Temperature Scroll Compressors	72
Scroll Compressors	74
H Series - Residential and Light Commercial Scroll Compressors	74
S Series - Light Commercial and Commercial Scroll Compressors	77
DSH Series - Light Commercial and Commercial Scroll Compressors with Intermediate Discharge Valves	79
MLZ - Low Temperature Light Commercial and Commercial Scroll Compressors	80
LLZ - Medium Temperature Light Commercial and Commercial Scroll Compressors	82
Capacitors and Relays	83
Code Number Index	84

T2 / TE2 - Thermostatic Expansion Valves

Danfoss T2/TE2 brass body thermostatic expansion valves feature flare inlet and outlet connections. By pairing one valve body with one of eight replaceable orifices, a contractor can satisfy applications from -40°F to $+50^{\circ}\text{F}$ and from $\frac{1}{8}$ to $5\frac{3}{4}$ tons capacity (see capacity chart for specifics).

Features T2 / TE2

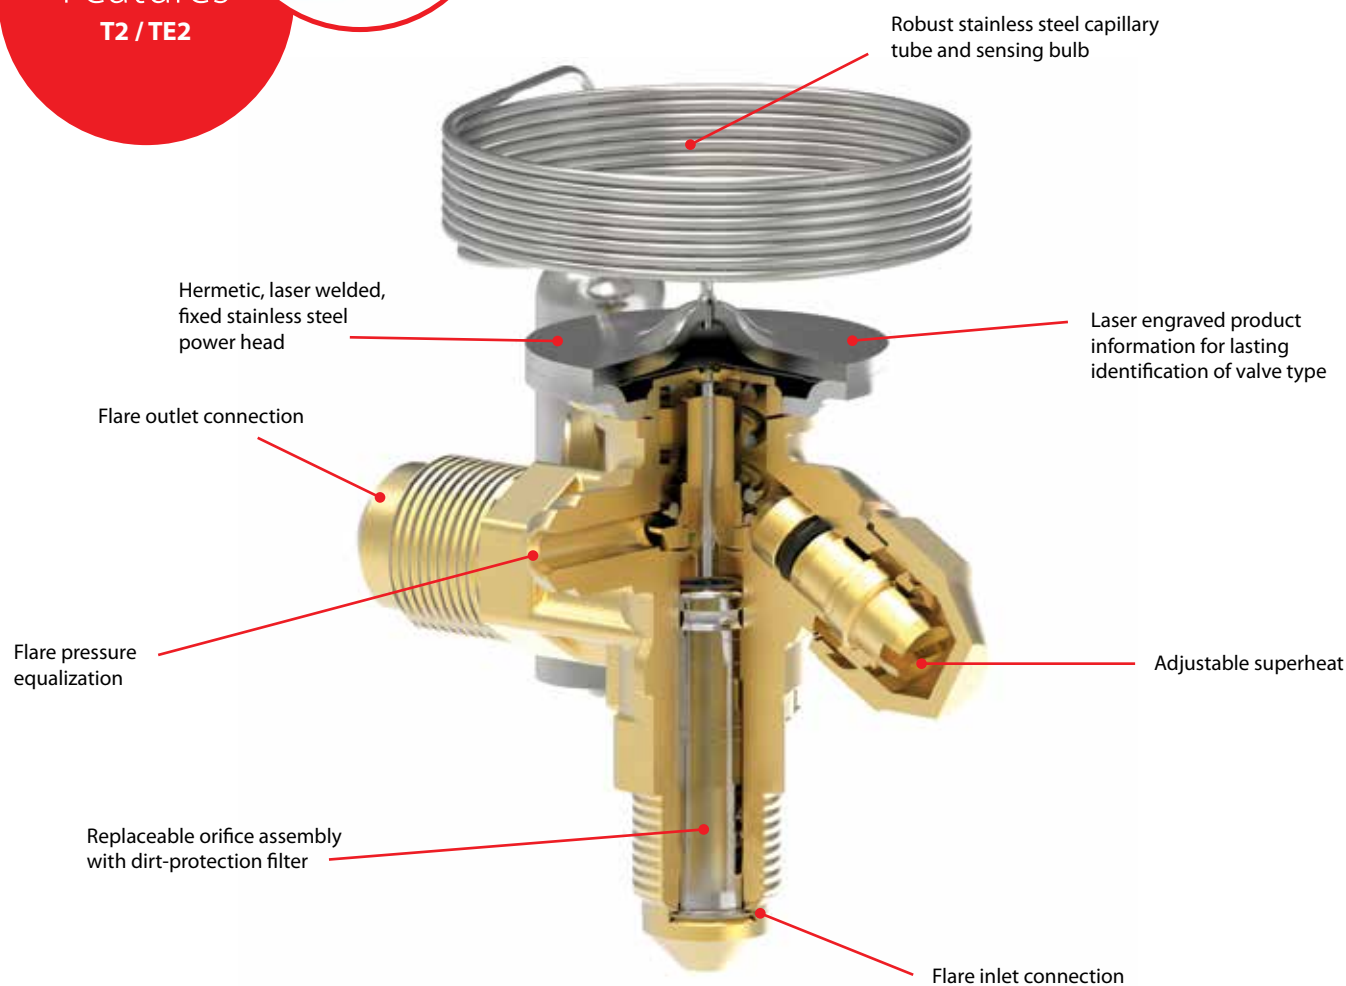

Facts

Applications:

- Commercial refrigeration
- Self-contained refrigerators
- Transport refrigeration
- Supermarket refrigeration
- Temperature range: -40°F to $+50^{\circ}\text{F}$
- Capacity range: $\frac{1}{8}$ to $5\frac{3}{4}$ tons (varies by refrigerant)
- Refrigerants: R-22, R-407C, R-134a, R-404A, R-448A, R-449A
- Functional valve consists of valve body and orifice
- Flare/solder adaptor available

Product Selection

1. Select Valve Body

Equalization	R-22	R-407C	R-404A	R-134a	R-448A	R-449A
Internal	068Z3206		068Z3400	068Z3346	068Z3727	
External	068Z3209		068Z3403	068Z3348	068Z3728	

All valves above have 3/8 in. x 1/2 in. flare connections and are desined for evaporator temperatures –40 °F to 50 °F (N charge). Other variations available, please contact your local Danfoss authorized wholesaler.

2. Select Orifice

A. T2/TE2 valve capacities are based on the installed orifice. To select the correct size, use one of the two methods below:

A. System characteristics: Select the orifice using appropriate refrigerant, evaporator temperature, and system capacity.

OR

B. Nominal capacity of the installed valve: Use the nominal capacity of the originally installed valve and match with the nominal capacity in chart (3rd column from left).

Technical data and ordering

T2 and TE2 (IF EXACT CAPACITY CANNOT FOUND, USE NEXT LARGER ORIFICE)

R-22		R-407C	Evaporator temperature (°F)										
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ¹ (tons)	-40	-30	-20	-10	0	10	20	30	40	50	
			Rated capacity ² (tons)										
0X	068-2002	¼	⅓	¼	¼	¼	¼	¼	¼	¼	¼	¼	
00	068-2003	½	¼	⅓	⅓	⅓	⅓	⅓	½	½	½	½	
01	068-2010	1	⅓	⅓	½	½	½	¾	¾	¾	1	1	
02	068-2015	1 ⅓	⅓	½	½	¾	¾	1	1	1 ¼	1 ⅓	1 ⅓	
03	068-2006	2 ⅓	¾	¾	1	1	1 ⅓	1 ½	1 ¾	2	2 ¼	2 ⅓	
04	068-2007	3 ⅓	1	1	1 ½	1 ¾	2	2 ⅓	2 ¾	3	3 ½	3 ½	
05	068-2008	5	1 ⅓	1 ¾	2	2 ⅓	2 ¾	3	3 ¾	4 ¼	4 ¾	5	
06	068-2009	5 ½	1 ½	2	2 ⅓	2 ¾	3	3 ¾	4 ½	5	5 ½	5 ¾	

R-404A			Evaporator temperature (°F)										
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ¹ (tons)	-40	-30	-20	-10	0	10	20	30	40	50	
			Rated capacity ² (tons)										
0X	068-2002	⅙	⅙	⅙	⅙	⅙	⅙	⅓	⅓	⅓	⅓	⅓	
00	068-2003	⅓	⅓	⅓	¼	¼	⅓	⅓	⅓	⅓	⅓	⅓	
01	068-2010	¾	¼	⅓	⅓	⅓	½	½	½	¾	¾	¾	
02	068-2015	1	¼	⅓	⅓	½	½	¾	¾	1	1	1	
03	068-2006	1 ¾	½	½	¾	¾	1	1 ⅓	1 ½	1 ¾	1 ¾	1 ¾	
04	068-2007	2 ¾	¾	¾	1	1 ⅓	1 ½	2	2 ⅓	2 ½	3	3	
05	068-2008	3 ¾	1	1	1 ½	1 ¾	2	2 ½	3	3 ½	3 ¾	4	
06	068-2009	4 ½	1	1 ⅓	1 ¾	2	2 ½	3	3 ¾	4	4 ½	4 ½	

R-134a			Evaporator temperature (°F)										
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ¹ (tons)	-40	-30	-20	-10	0	10	20	30	40	50	
			Rated capacity ² (tons)										
0X	068-2002	⅓	⅙	⅙	⅙	⅙	⅙	⅓	⅓	⅓	⅓	⅓	
00	068-2003	⅓	⅙	⅙	⅓	⅓	¼	¼	¼	⅓	⅓	⅓	
01	068-2010	½	⅓	¼	¼	⅓	⅓	⅓	½	½	½	½	
02	068-2015	¾	¼	¼	⅓	⅓	⅓	½	½	½	¾	¾	
03	068-2006	1 ½	⅓	⅓	½	½	¾	¾	1	1	1 ¼	1 ⅓	
04	068-2007	1 ¾	½	½	¾	¾	1	1 ¼	1 ⅓	1 ½	1 ¾	2	
05	068-2008	2 ⅓	¾	¾	1	1	1 ⅓	1 ½	1 ¾	2	2 ⅓	2 ½	
06	068-2009	3	¾	1	1¼	1 ⅓	1 ½	2	2 ¼	2 ½	2 ¾	3	

R-448A			Evaporator temperature (°F)					
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ³ (tons)	-40	-20	0	20	40	50
			Rated capacity ² (tons)					
0X	068-2002	¼	¼	¼	¼	¼	¼	¼
00	068-2003	½	⅓	⅓	⅔	½	½	½
01	068-2010	1	⅔	½	¾	⅞	1	1
02	068-2015	1 ⅜	½	⅔	¾	1 ½	1 ⅜	1 ½
03	068-2006	2 ½	¾	1	1 ⅜	1 ⅞	2 ½	2 ½
04	068-2007	3 ⅜	1 ½	1 ⅜	2	2 ½	3 ⅜	4
05	068-2008	4 ⅜	1 ⅜	2	2 ¾	3 ⅜	4 ¾	5 ½
06	068-2009	5 ⅜	1 ¾	2 ½	3 ⅜	4 ½	5 ¾	6 ¼

R-449A			Evaporator temperature (°F)					
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ³ (tons)	-40	-20	0	20	40	50
			Rated capacity ² (tons)					
0X	068-2002	¼	¼	¼	¼	¼	¼	¼
00	068-2003	½	⅓	⅓	⅔	½	½	½
01	068-2010	1	⅔	½	¾	⅞	1	1
02	068-2015	1 ½	½	⅔	¾	1	1 ½	1 ½
03	068-2006	2 ½	¾	1	1 ⅜	1 ½	2 ⅜	2 ½
04	068-2007	3 ⅜	1 ¼	1 ⅜	2	2 ¾	3 ½	3 ¾
05	068-2008	4 ½	1 ⅜	2	2 ¾	3 ⅜	4 ¾	5
06	068-2009	5 ⅜	1 ¾	2 ½	3 ¼	4 ½	5 ¾	6

All capacity data is in accordance to ARI 750-2007 except where noted.

¹ Nominal capacity based on ARI standards: Evaporating temperature = 40 °F, Liquid temperature = 100 °F, Condensing temperature = 110 °F

² Capacity based on condensing temperature of 95 °F and a vapor free liquid temperature of 88 °F ahead of the expansion valve.

³ Condensing temperature = 100 °F


Spare Parts and Accessories

Description	Danfoss Code No.
Bulb strap	068U3507

Selection and Installation Instructions

1. Select Valve Body

Select the valve body based on refrigerant and need for internal or external equalization using the table on the previous page under "Select Valve Body."




2. Select Orifice

T2/TE2 valve capacities are based on the installed orifice.
To select the correct size orifice, use one of the two methods using the "Select Orifice" section on the previous page.



3. Assemble Valve and Install into System

- Slide the orifice into the valve body and secure using liquid line flare nut
- Attach evaporator inlet or distributor assembly to valve outlet flare nut
- Tighten both flare nuts
 - Specification for inlet is 26–33 ft.-lbs
 - Specification for outlet is 37–52 ft.-lbs
- Secure sensing bulb with enclosed bulb strap to suction line. Bulb should be located between 1:00 & 4:00 or 8:00 & 11:00 on the tube, and the strap should be tight enough that no bulb movement is possible.
- Wrap included insulation tape beginning one inch before the bulb and overlapping each wrap, finishing one inch beyond the bulb on the other end.



4. Adjust Superheat

- Remove the cap
- Make superheat adjustments $\frac{1}{4}$ turn at a time ($\frac{1}{4}$ turn ≈ 1.75 °F).
 - Turning clockwise increases superheat.
 - Turning counter-clockwise decreases superheat.
- Reinstall the cap



Easy to carry kits for truck stock

All T2/TE2 valve bodies and orifice featured on the next page and a hex key for superheat adjustment.

068Z7100

Both TUA/TUAE valve bodies and orifices and T2/TE2 and orifices plus gaskets for TUA/TUAE and a hex key for superheat adjustment.


068U7001

Kits are plastic cases with foam inserts, all valves and orifices, and instructions for selection and installation of the valves. Empty kits and foam available upon request.

TUA / TUAE - Thermostatic Expansion Valves

Danfoss TUA/TUAE stainless steel thermostatic expansion valves feature solder inlet and outlet connections. By pairing one valve body with one of ten replaceable orifices, a contractor can satisfy applications from -40 °F to + 50 °F and up to 4 ½ tons capacity (see capacity chart for specifics).

Features TUA / TUAE

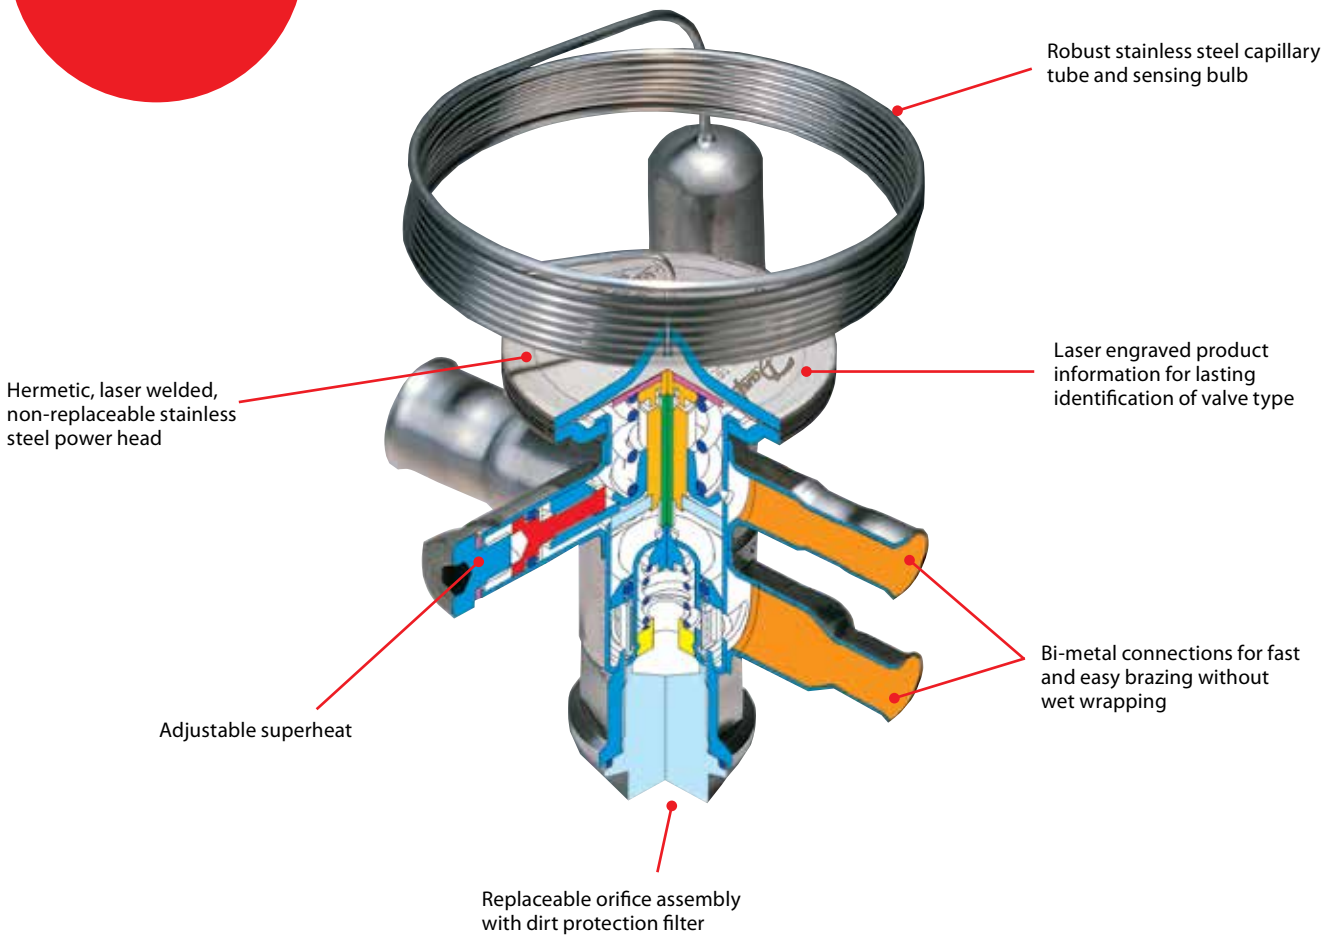

Facts

Applications:

- Traditional refrigeration
- Self-contained refrigerators
- Transport refrigeration
- Supermarket refrigeration
- Temperature range: -40 °F to +50 °F
- Capacity range: 1/80 to 4 ½ tons (varies by refrigerant)
- Refrigerants: R-22, R-407C, R-134a, R-404A
- Functional valve consists of valve body and orifice

Scan the QR Code for a video with more information on the TUA valve features and installation or visit <http://bit.ly/TUAinstall>



Product Selection

1. Select Valve Body

Equalization	R-22	R-407C	R-404A	R-134a	R-448A	R-449A
Internal	068U2235	068U2285	068U2205	068U3945	068U3946	
External	068U2237	068U2287	068U2207	068U3859	068U3858	

All valves above have 3/8 in. x 1/2 in. solder ODF connections and are designed for evaporator temperature -40 °F to 50 °F (N charge). Other variation available, please contact your local Danfoss authorized wholesaler.

2. Select Orifice

TUA/TUAE valve capacities are based on the installed orifice. To select the correct size, use one of the two methods below:

A. System characteristics: Select the orifice using appropriate refrigerant, evaporator temperature, and system capacity.

OR

B. Nominal capacity of the installed valve: Use the nominal capacity of the originally installed valve and match with the nominal capacity in chart (3rd column from left).

Technical data and ordering

TUA and TUAE (IF EXACT CAPACITY CANNOT BE FOUND, USE NEXT LARGER ORIFICE)

R-22			R-407C		Evaporator temperature (°F)								
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ¹ (tons)	-40	-30	-20	-10	0	10	20	30	40	50	
			Rated capacity ² (tons)										
0	068U1030	1/8	1/16	1/16	1/16	1/16	1/8	1/8	1/8	1/8	1/8	1/8	
1	068U1031	1/8	1/16	1/8	1/8	1/8	1/8	1/8	1/8	1/8	1/4	1/4	
2	068U1032	1/4	1/16	1/8	1/8	1/8	1/8	1/8	1/4	1/4	1/4	1/8	
3	068U1033	1/8	1/8	1/8	1/8	1/4	1/4	1/8	1/8	1/8	1/8	1/8	
4	068U1034	1/2	1/4	1/4	1/4	1/8	1/8	1/2	1/2	1/2	3/4	3/4	
5	068U1035	3/4	1/8	1/8	1/8	1/2	1/2	3/4	3/4	3/4	1	1	
6	068U1036	1 1/2	1/2	1/2	1/2	3/4	3/4	1	1 1/4	1 1/8	1 1/2	1 1/2	
7	068U1037	2	1/2	3/4	3/4	1	1	1 1/8	1 1/2	1 3/4	2	2	
8	068U1038	2 3/4	1	1	1 1/8	1 1/2	1 3/4	2	2 1/8	2 1/2	3	3	
9	068U1039	4	1 1/8	1 1/2	1 3/4	2	2 1/2	2 3/4	3 1/4	3 1/2	4	4 1/2	
R-404A			Evaporator temperature (°F)										
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ¹ (tons)	-40	-30	-20	-10	0	10	20	30	40	50	
			Rated capacity ² (tons)										
0	068U1030	1/8	1/20	1/20	1/16	1/16	1/10	1/10	1/8	1/8	1/8	1/8	
1	068U1031	1/8	1/16	1/16	1/10	1/8	1/8	1/8	1/8	1/8	1/8	1/8	
2	068U1032	1/4	1/16	1/16	1/10	1/8	1/8	1/8	1/8	1/4	1/4	1/4	
3	068U1033	1/8	1/10	1/8	1/8	1/8	1/8	1/4	1/4	1/8	1/8	1/8	
4	068U1034	1/2	1/8	1/8	1/4	1/4	1/8	1/8	1/2	1/2	1/2	1/2	
5	068U1035	3/4	1/8	1/4	1/8	1/8	1/2	1/2	1/2	3/4	3/4	3/4	
6	068U1036	1 1/4	1/8	1/8	1/2	1/2	3/4	3/4	1	1	1	1 1/8	
7	068U1037	1 1/2	1/8	1/2	1/2	3/4	1	1	1 1/8	1 1/2	1 1/2	1 3/4	
8	068U1038	2 1/8	1/2	3/4	1	1	1 1/8	1 1/2	2	2	2 1/8	2 1/2	
9	068U1039	3 1/8	3/4	1	1 1/8	1 1/2	2	2 1/4	2 1/2	3	3 1/2	3 3/4	
R-134a			Evaporator temperature (°F)										
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ¹ (tons)	-40	-30	-20	-10	0	10	20	30	40	50	
			Rated capacity ² (tons)										
0	068U1030	1/8	1/30	1/20	1/20	1/20	1/16	1/16	1/10	1/10	1/8	1/8	
1	068U1031	1/8	1/20	1/16	1/16	1/10	1/10	1/8	1/8	1/8	1/8	1/8	
2	068U1032	1/8	1/16	1/16	1/16	1/10	1/8	1/8	1/8	1/8	1/8	1/8	
3	068U1033	1/4	1/16	1/10	1/8	1/8	1/8	1/8	1/8	1/4	1/4	1/4	
4	068U1034	1/8	1/8	1/8	1/8	1/8	1/4	1/4	1/8	1/8	1/8	1/2	
5	068U1035	1/2	1/8	1/8	1/4	1/4	1/8	1/8	1/2	1/2	1/2	1/2	
6	068U1036	3/4	1/4	1/4	1/8	1/8	1/2	1/2	3/4	3/4	1	1	
7	068U1037	1 1/4	1/8	1/8	1/2	1/2	3/4	3/4	1	1	1 1/4	1 1/2	
8	068U1038	1 3/4	1/2	1/2	3/4	3/4	1	1 1/4	1 1/2	1 3/4	2	2	
9	068U1039	2 1/8	3/4	1	1	1 1/4	1 1/8	1 3/4	2	2 1/4	2 3/4	3	

R-448A			Evaporator temperature (°F)					
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ³ (tons)	-40	-20	0	20	40	50
			Rated capacity ² (tons)					
0	068U1030	1/8	2/25	1/10	1/8	1/6	1/5	1/5
1	068U1031	1/4	1/10	1/8	1/5	1/4	1/4	1/3
2	068U1032	1/2	1/8	1/6	1/5	1/4	1/3	1/3
3	068U1033	3/8	1/6	1/5	1/4	1/3	2/5	1/2
4	068U1034	3/4	1/4	1/3	1/2	3/5	3/4	4/5
5	068U1035	1	1/3	1/2	3/5	3/4	1	1
6	068U1036	1 1/2	1/2	2/3	1	1 1/5	1 1/2	1 3/5
7	068U1037	2	2/3	1	1 1/4	1 3/5	2	2 1/4
8	068U1038	3	1	1 1/3	1 4/5	2 1/3	3	3 1/4
9	068U1039	4	1 3/5	1 4/5	2 2/5	3 1/6	4	4 1/2

R-449A			Evaporator temperature (°F)					
Orifice size	Danfoss Code No.	Nominal capacity of installed valve ³ (tons)	-40	-20	0	20	40	50
			Rated capacity ² (tons)					
0	068U1030	1/8	2/25	1/10	1/8	1/6	1/5	1/5
1	068U1031	1/4	1/10	1/8	1/5	1/4	1/4	1/3
2	068U1032	1/2	1/8	1/6	1/5	1/4	1/3	1/3
3	068U1033	3/8	1/6	1/5	1/4	1/3	2/5	2/5
4	068U1034	3/4	1/4	1/3	1/2	3/5	3/4	4/5
5	068U1035	1	1/3	1/2	3/5	3/4	1	1
6	068U1036	1 3/5	1/2	2/3	1	1 1/5	1 1/2	1 3/5
7	068U1037	2	2/3	1	1 1/5	1 1/2	2	2 1/6
8	068U1038	2 4/5	1	1 1/3	1 3/4	2 1/3	2 4/5	3 1/10
9	068U1039	4	1 1/3	1 4/5	2 1/3	3 1/8	4	4 2/5

All capacity data is in accordance to ARI 750-2007 except where noted.

¹ Nominal capacity based on ARI standards: Evaporating temperature = 40 °F, Liquid temperature = 100 °F, Condensing temperature = 110 °F

² Capacity based on condensing temperature of 95 °F and a vapor free liquid temperature of 85 °F ahead of the expansion valve.

³ Condensing temperature = 100 °F

Spare Parts and Accessories

Description	Danfoss Code No.
Bulb strap	068U3507
Metal Gasket (24 pcs)	068U0015
Filter for orifices 0–4 (clear, 24 pcs)	068U1706
Filter for orifices 5–9 (blue, 24 pcs)	068U0016

Selection and Installation Instructions

1. Select Valve Body

Select the valve body based on refrigerant and need for internal or external equalization using the table on the previous page under "Select Valve Body."




2. Select Orifice

1. Select one of ten orifices using the "Select Orifice" section on the previous page.
2. Prior to installing into system, verify that only mesh portions of the screen cover the orifice inlet.



3. Assemble Valve

1. Place one drop of refrigerant oil between the screen cage and the pushpin.
 2. Verify that the metal gasket is seated on the base of the orifice.
 3. Tighten orifice into valve (specification is 26–30 ft.-lbs.). In addition to eliminating leaks, proper torquing insures proper superheat control.
- Replace the metal washer/gasket that is mounted at the base of the orifice every time you change the orifice assembly or remove it from the valve body.



4. Braze Valve into System

1. Clean and insert copper tubing into appropriate connection on valve.
 2. Direct torch at copper tubing until it begins to color (10–15 seconds).
 3. Briefly direct torch on valve connection (2–5 seconds).
 4. Apply brazing alloy until it flows.
Do not try to fill the ridge. Attempts to do so may clog the connector.
- Sweat connections using any common brazing alloy (minimum 5% silver). As internal connector surface is copper, connections are copper to copper, and there is no need for use of high content silver solder or flux.
- **NO WET WRAP REQUIRED**
5. Secure sensing bulb with enclosed bulb strap to suction line. Bulb should be located between 1:00 & 4:00 or 8:00 & 11:00 on the tube, and the strap should be tight enough that no bulb movement is possible.
 6. Wrap included insulation tape beginning one inch before the bulb and overlapping each wrap, finishing one inch beyond the bulb on the other end.

5. Adjust Superheat

1. Remove the cap with a $\frac{5}{32}$ inch hex key.
 2. Make superheat adjustments $\frac{1}{4}$ turn at a time ($\frac{1}{4}$ turn $\approx 1^\circ\text{F}$).
 - Turning clockwise increases superheat.
 - Turning counter-clockwise decreases superheat.
 3. Reinstall the cap.
- Expansion valves on low temperature systems may require minor adjustment as the factory setting is for medium temperature systems.



Easy to carry kits for truck stock

All TUA/TUAE valve bodies and orifice featured on the next page and a hex key for superheat adjustment.

068U7000

Both TUA/TUAE valve bodies and orifices and T2/TE2 and orifices plus gaskets for TUA/TUAE and a hex key for superheat adjustment.

068U7001

Kits are plastic cases with foam inserts, all valves and orifices, and instructions for selection and installation of the valves. Empty kits and foam available upon request.

TUA - Thermostatic Expansion Valves for Ice Machines

These kits are designed with contractors in mind to help save time and money by providing a universal valve that can easily be adapted to replace most OEM specific TXVs. Two kits are available, each with a valve body and a selection of three orifice sizes, copper fittings (two elbows and one reducer), a patented bulb strap, and insulation tape.



Facts

Applications:

- Ice machines
- Ice machine capacity: 75 to 2300 pounds per day
- Two kits available
- Each kit contains:
 - Exchangeable orifice thermostatic expansion valve
 - Selection of (3) orifice sizes
 - Copper fittings (2 elbows and 1 reducer)
 - Copper bulb strap
 - Insulation tape
 - Installation guide

Selection and installation instructions


1. Determine the type of machine (cube, flake, or nugget), output of the machine in pounds of ice per 24 hours, and the number of expansion devices installed.
 2. Divide the output in pounds of ice by the number of expansion valves.
 3. Use the appropriate selection table below under Technical data and ordering to determine the correct orifice size for the ice output per expansion valve.
 4. Adhere to start up and performance measurements as specified in the Instructions included with the kit.
- After the new valve is installed and the machine is back in operation, it is important to verify appropriate superheat performance. Cube ice machines typically start cycles with high superheat, which decreases as a harvest cycle approaches.

A properly sized and adjusted valve will assure adequate capacity during all phases of the freeze cycle and positive superheat through the cycle. As the valve nears the end of the freeze cycle it is imperative that you accurately measure the evaporator superheat.

1. Inspect the ice for sufficient production.
2. Inspect the suction line just before the compressor for any frost that could indicate liquid flooding.
3. Measure superheat at the end of the freeze cycle.
4. If superheat is between 10 °F and 18 °F, ice is forming appropriately, and there is no sign of liquid flooding, the installation is complete.
5. If superheat is below 10 °F, increase superheat.
6. If superheat is above 18 °F, decrease superheat.
7. If after adjusting superheat you still see too low superheat or liquid flooding, please install the next smaller orifice and repeat this process.
8. If after adjusting superheat you still see too high superheat or insufficient ice formation, please install the next larger orifice and repeat this process.

If superheat adjustment is necessary, follow these steps:

1. Remove the cap with a $\frac{5}{32}$ inch hex key.
2. Make superheat adjustments $\frac{1}{4}$ turn at a time ($\frac{1}{4}$ turn ≈ 1 °F).
 - Turning clockwise increases superheat.
 - Turning counter-clockwise decreases superheat.
3. Reinstall the cap.



Technical data and ordering

TUA for Ice Machines

Machine Size	Estimated orifice size	lbs. of ice/24 hrs. per valve		Danfoss Code No.
		Cuber	Flaker/Nugget	
small	1	75–150	75–200	068U4900 ¹
	3	151–350	201–500	
	5	351–600	501–950	
large	7	601–1200	951–1650	068U4901 ²
	8	1201–1800	1651–2300	

Ice machine kits contain valve, (3) orifices in corresponding tables, (2) elbow fittings, (1) reducer, copper bulb strap, insulation tape, and instructions.

¹Valve in 068U4900 kit above has straightway $\frac{1}{4}$ in. $\times$ $\frac{3}{8}$ in. ODF connections

²Valve in 068U4901 kit above has straightway $\frac{3}{8}$ in. $\times$ $\frac{1}{2}$ in. ODF connections


Scan the QR Code for a video with more information on the TUA ice machine kits or visit <http://bit.ly/TUAicekit>



TR6 - Thermostatic Expansion Valve Kits

Danfoss TR6 kits include a valve, Aeroquip, Chatleff, and $\frac{3}{8}$ inch flare fittings for evaporator connections, insulating tape, a bulb strap and instructions for easy installation in the field. All valves have a balanced port design which reduces the influence from varying condensing pressures. The valves feature a built-in check valve for heat pump applications and an anti-hunt bulb charge, optimized for residential A/C requirements.

Features TR6

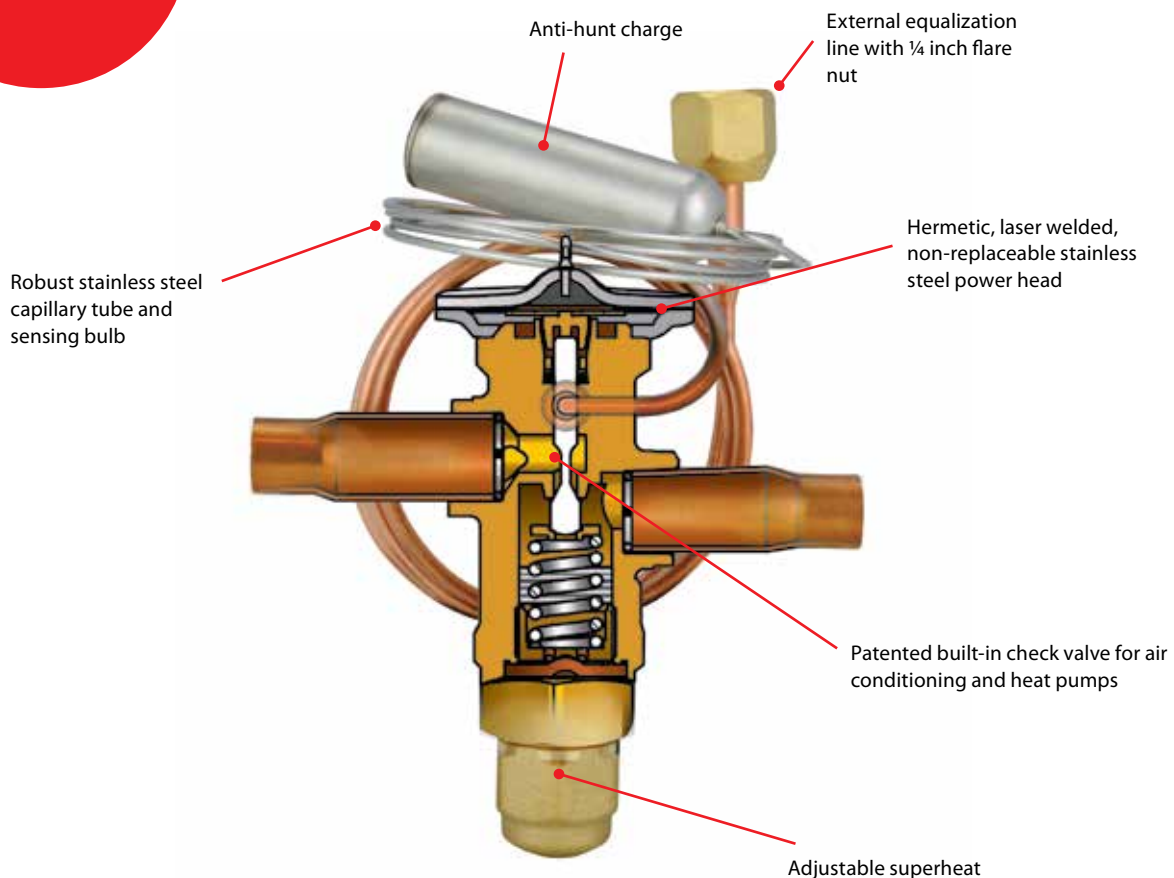

Facts

Applications:

- Residential air conditioning
- Rooftop units
- Heat pumps
- Light commercial air conditioning
- Chillers
- Split systems

- Refrigerants: R-22, R-407C, R-410A
- Capacity range: 3 to 7 Tons
- Temperature range: 15 °F to 60 °F

Kits Include:

- Thermostatic Expansion Valve
- Aeroquip, Chatleff, $\frac{3}{8}$ inch flare fittings
- Insulating tape
- Bulb strap
- Installation guide

Technical data and ordering



TR6

Refrigerant	System capacity (tons)	Solder ODF connection (in.)	Temperature range (°F)	Danfoss Code No. ¹
R-410A	1 ½–3	¾ × ¾	14 to 59	067L5955
	3 ½–4			067L5956
	4 ½–5			067L5957
	5 ½–6			067L5958
	6 ½–7			067L5959
R-22 R-407C	1 ½–2			067L5856
	2 ½–3			067L5857
	3 ½–4			067L5858
	5–6			067L5859

¹The valve kits listed above are standard aftermarket valves and are built with straightway connections, internal check valve, 24 in. equalization line with 1/4 in. flare nut, fixed orifice, and adjustable superheat spindle.



Easy to carry kits for truck stock	Danfoss Code No.
All (3) R-410A TR6 valve kit (pictured left)	067L7000
All (4) R-22 TR6 valve kits	067L7001

Spare Parts and Accessories

Description	Danfoss Code No.
Bulb strap	068U3507
Fitting ¾ in. ODM × Chatleff	119F3965
Fitting ¾ in. ODM × Aeroquip	119F3966


Scan the QR Code for a video with more information on TR6 valve features or visit <http://bit.ly/TR6Features>



TGE - Thermostatic Expansion Valves

Danfoss TGE thermostatic expansion valves are designed for commercial air conditioning and refrigeration. They feature a balanced port design which reduces the influence from varying condensing pressures. The air conditioning valves in this catalog feature an anti-hunt charge optimized for A/C applications and the refrigeration valves are designed for stable operation across a wide temperature range.

Features TGE

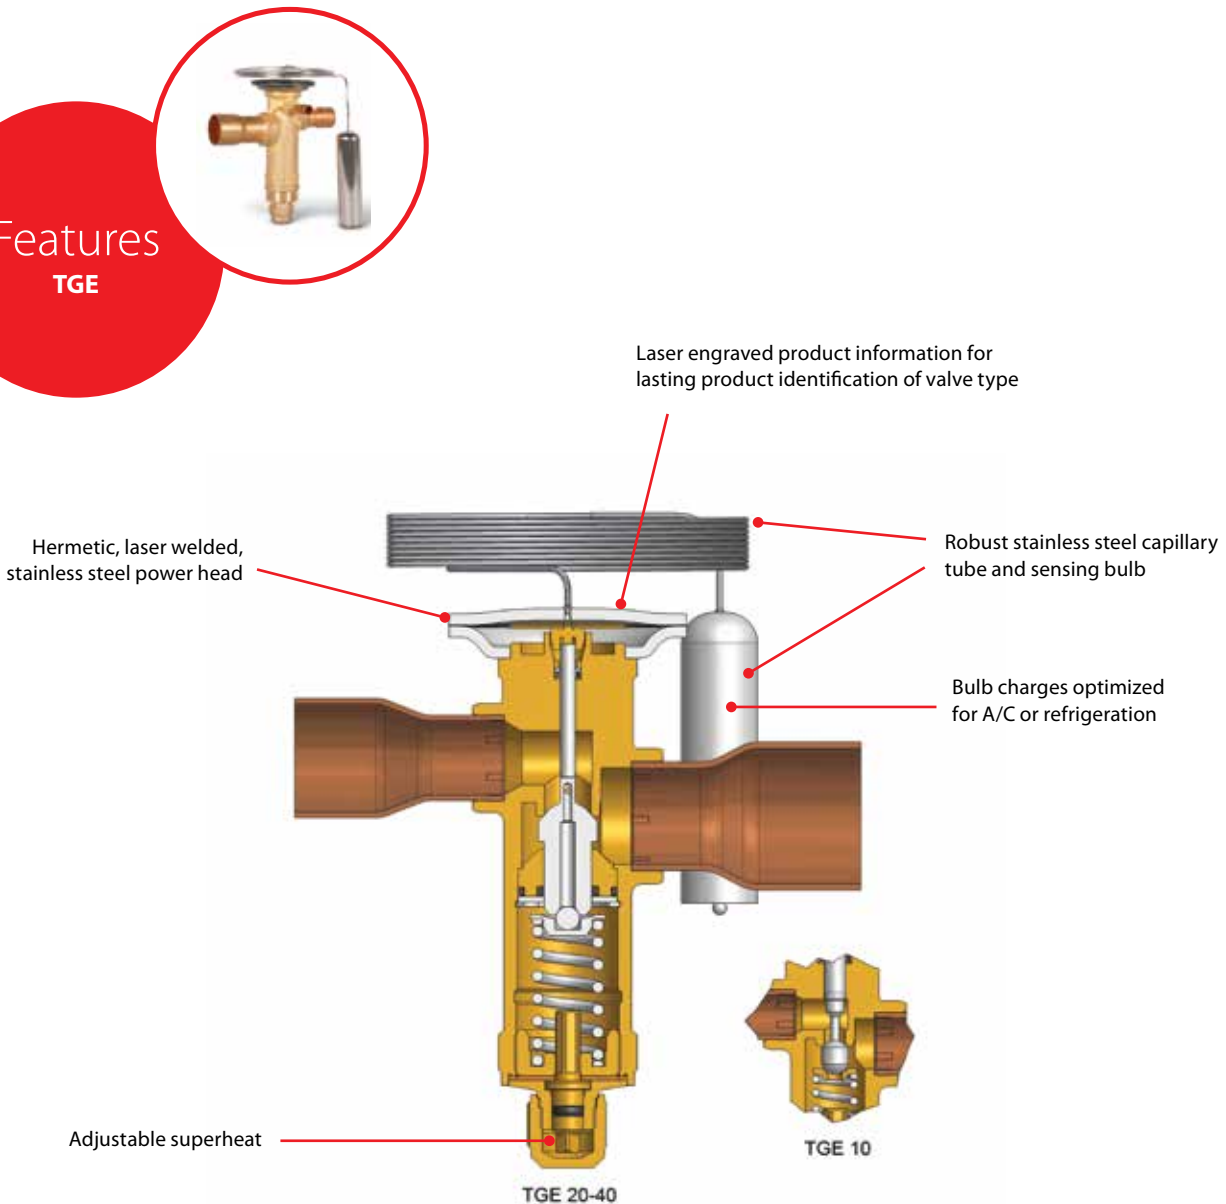

Facts

Applications:

- Traditional refrigeration
- Residential air conditioning
- Rooftops
- Commercial air conditioning
- Chillers
- Refrigerants: R-22, R-407C, R-410A, R-404A, R-507A, R-134a
- Capacity range: 9 to 46 tons (varies by refrigerant)
- Temperature range:
 - Refrigeration Valves: -40 °F to +50 °F
 - Air Conditioning Valves: -22 °F to +60 °F
- Balanced port

Technical data and ordering



TGE

Danfoss Type	Competitor Model Numbers		Nominal capacity (tons) ³	Solder ODF connection (in.)	Danfoss Code No.
R-22, MAH charge ¹			R-407C, MAH charge ¹		
TGEX 10	SVE-5, EVRE-5	HFES-5H	6	½ × ⅝	067N9403
TGEX 10	SVE-5, EVRE-5	HFES-5H	6	½ × ⅞	067N9404
TGEX 10	SVE-6, EVRE-6		7 ½	⅝ × ⅞	067N9406
TGEX 10	SVE-6, EVRE-6		7 ½	⅝ × 1 ⅛	067N9483
TGEX 10	SVE-8, SVE-10, EBSVE 8, EVRE 8, EVRE 10	HFES-8H, HFES-10H, TRAE-10H	11	⅝ × ⅞	067N9407
TGEX 20	EBSVE 11, EVRE 12		12	⅝ × ⅞	067N9409
TGEX 20	EBSVE15, OVE 15	HFES-15H, TRAE-15H	15	⅝ × 1 ⅛	067N9411
TGEX 20	EBSVE15, OVE 15	HFES-15H, TRAE-15H	15	⅞ × 1 ⅛	067N9412
TGEX 20			18	⅞ × 1 ⅛	067N9413
TGEX 40	EBSVE 20, OVE 20	HFES-20H, TRAE 20H	26	⅞ × 1 ⅜	067N9415
TGEX 40	OVE 30	TRAE 30H	30	1 ⅛ × 1 ⅜	067N9418
TGEX 40	OVE 40	TRAE 40H	38	2 ⅛ × 1 ⅜	067N9419
R-410A, MAH charge ¹					
TGEL 10	ERZE-8		9	⅝ × ⅞	067N9206
TGEL 10	ERZE-12.5	TFES-12Z	13	⅝ × ⅞	067N9207
TGEL 20	ERZE-15	TFES-16Z	15	⅝ × ⅞	067N9209
TGEL 20	ERZE-15	TFES-16Z	15	⅝ × 1 ⅛	067N9210
TGEL 20	OZE-20		23	⅞ × 1 ⅛	067N9213
TGEL 20	OZE-20		23	1 ⅛ × 1 ⅛	067N9284
TGEL 40	OZE-25		31	⅞ × 1 ⅛	067N9285
TGEL 40	OZE-25		31	⅞ × 1 ⅜	067N9215
TGEL 40	OZE-35		35	1 ⅛ × 1 ⅜	067N9218
TGEL 40			46	1 ⅛ × 1 ⅜	067N9219
R-134a, N charge ²					
TGEN 10	SJE-5, SJE-6, EBSJE-5	HFES-6M	7	⅝ × 1 ⅛	067N5158
TGEN 20	EBSJE-7	HFES-7.5M	8	⅝ × ⅞	067N5159
TGEN 20	EBSJE-12, OJE-12	HFES-11M	12	⅞ × 1 ⅛	067N5163
TGEN 40	OJE-16	HFES-14M, TRAE-13M, TRAE-14M	17	1 ⅛ × 1 ⅛	067N5254
TGEN 40			20	1 ⅛ × 1 ⅛	067N5255
TGEN 40	OJE-23	TRAE-22M	25	1 ⅛ × 1 ⅜	067N5169
R-404A, N charge ²			R-507A, N charge ²		
TGES 10	SSE-3	HFES-3.5S	4	½ × ⅞	067N6151
TGES 10	SSE-4	HFES-5S	5	½ × ⅞	067N6166
TGES 10	SSE-4	HFES-5S	5	⅝ × ⅞	067N6150
TGES 10	SSE-6, SSE-7, EBSSE-6	HFES-7S	7 ½	⅝ × ⅞	067N6154
TGES 20	EBSSE-7.5	TRAE-8S	9	⅝ × ⅞	067N6158
TGES 20	EBSSE-10, OSE-9	HFES-10S	11	⅝ × ⅞	067N6188
TGES 20	EBSSE-10, OSE-9	HFES-10S	11	⅝ × 1 ⅛	067N6155
TGES 20	EBSSE-10, OSE-9	HFES-10S	11	⅞ × 1 ⅛	067N6181
TGES 20	EBSSE-13, OSE-12	HFES-13S, TRAE-12S	13	⅞ × 1 ⅛	067N6162
TGES 20	OSE-21	TRAE-20S	21	1 ⅛ × 1 ⅜	067N6186

¹ MAH charge: -22 °F to 60 °F, Maximum operating temperature = 300 °F

² N charge: -40 °F to 50 °F, Maximum operating temperature = 210 °F


³ Nominal capacity based on ARI standard: Evaporating temperature = 40 °F, Liquid temperature = 100 °F, Condensing temperature = 110 °F

Spare Parts and Accessories

Description	Danfoss Code No.
Bulb strap	067N0557

TD1/TDE1 - Thermostatic Expansion Valves

The Danfoss TD1/TDE1 range of thermostatic expansion valves are designed for small commercial refrigeration applications. TD1/TDE1 TXVs have been proven to achieve energy savings and quicker pull-down times when compared to a capillary tube. Danfoss TD1/TDE1 is UL approved and is available in a straight through configuration for refrigerants R-134a, R-404A, and R-290.

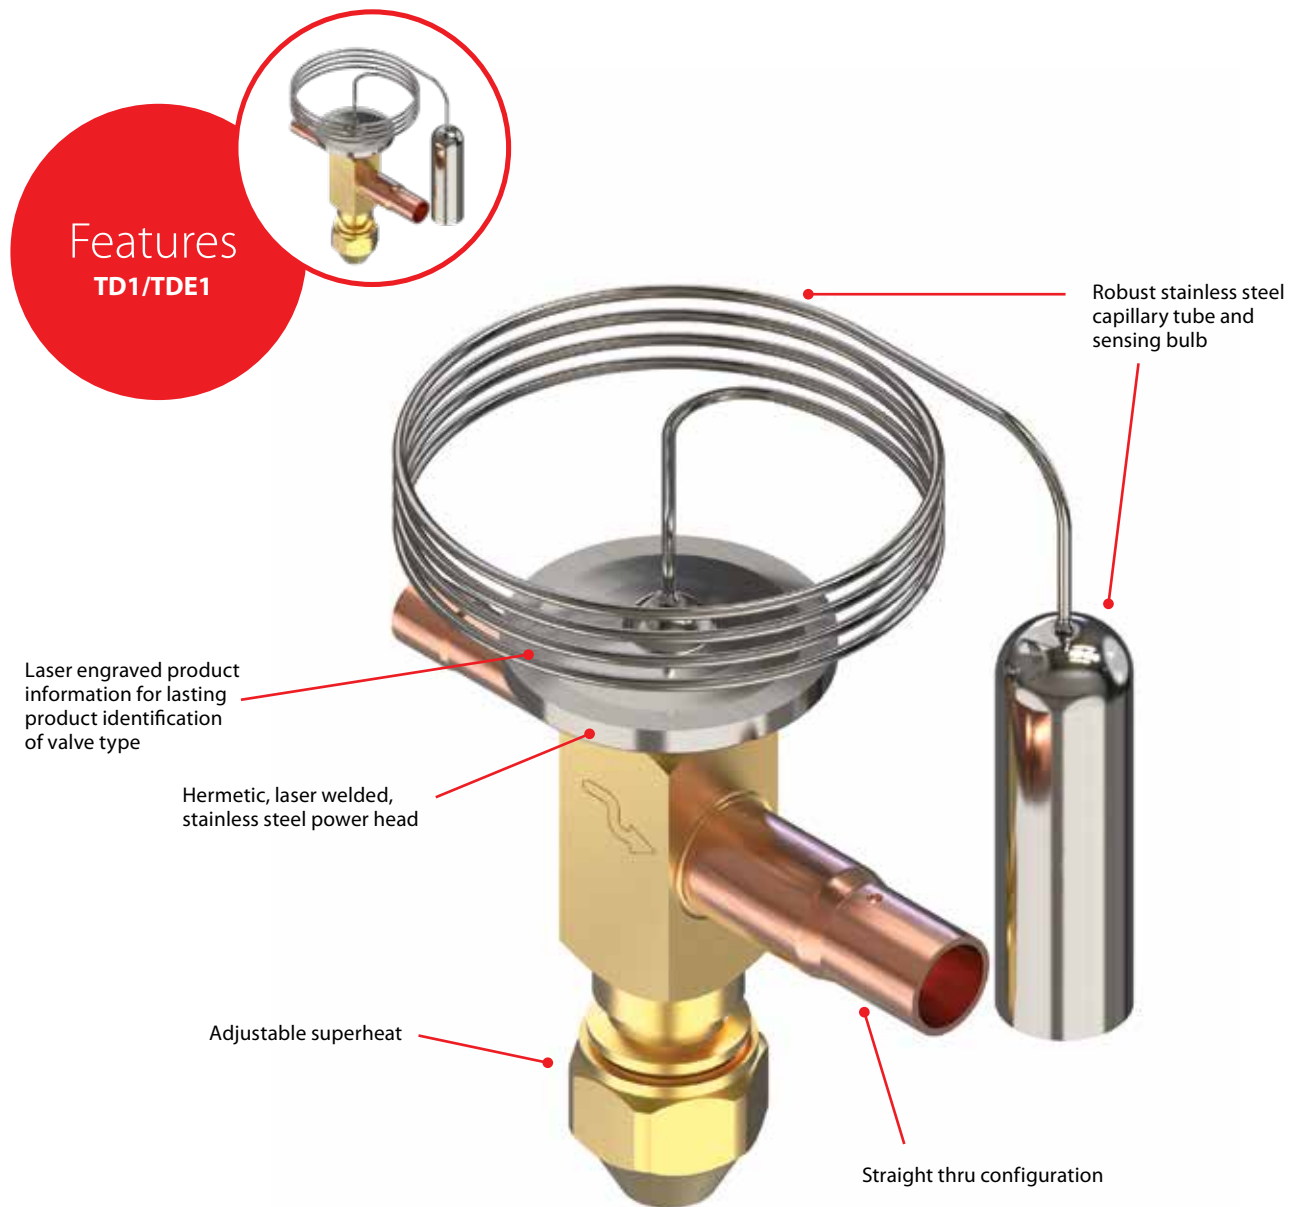

Facts

Applications:

- GDMs
- Ice cream cabinets
- small ice machines
- refrigerated beverage dispensers
- specialty cooling
- transport refrigeration
- reach-in fridges
- small chillers
- small refrigeration units
- Temperature range: -40°F – $+50^{\circ}\text{F}$
- Capacity range: 1/10–2 tons
- Refrigerants: R-134a, R-513A, R-404A, R-290, R-448A/9A

Technical data and ordering

TD1/TDE1 Thermostatic Expansion Valves

Model no.	Capacity* in TR MBP	Capacity* in TR LBP	Orifice size	Range	Inlet size (in.)	Outlet size (in.)	Equalization size (in.)	Superheat	Danfoss Code No.
R-134a ¹									
TD1-0 R134a	⅛	⅜ ₅₀	0	-40--+50 °F	⅜	½	—	Adjustable	068N7671
TD1-1 R134a	⅛	⅞ ₁₀	1						068N7672
TD1-2 R134a	⅓	⅓	2						068N7673
TD1-3 R134a	½	⅓	3						068N7674
TD1-4 R134a	¾	½	4						068N7675
TD1-5 R134a	1	½	5						068N7676
TDE1-3 R134a	½	⅓	3				¼		068N7690
TDE1-4 R134a	¾	½	4						068N7677
TDE1-5 R134a	1	½	5						068N7678
R-404A									
TD1-0 R404A	¼	⅞ ₁₀	0	-40--+50 °F	⅜	½	—	Adjustable	068N7679
TD1-1 R404A	⅓	⅞	1						068N7680
TD1-2 R404A	½	⅔ ₇	2						068N7663
TD1-3 R404A	⅔ ₃	½	3						068N7664
TD1-4 R404A	1	¾	4						068N7665
TD1-5 R404A	1 ½	¾	5						068N7666
TDE1-3 R404A	⅔ ₃	½	3				¼		068N7667
TDE1-4 R404A	1	¾	4						068N7668
TDE1-5 R404A	1 ½	¾	5						068N7669
R-290									
TD1-0 R290	¼	⅞	0	-40--+50 °F	⅜	½	—	Adjustable	068N7681
TD1-1 R290	⅓	⅓	1						068N7682
TD1-2 R290	½	⅝	2						068N7683
TD1-3 R290	¾	½	3						068N7684
TD1-4 R290	1 ¼	¾	4						068N7685
TD1-5 R290	2	1	5						068N7686
TDE1-3 R290	¾	½	3				¼		068N7687
TDE1-4 R290	1 ¼	¾	4						068N7688
TDE1-5 R290	2	1	5						068N7689
R-448A ²									
TD1-0 R448A/R449A	¼	⅞	0	-40--+50 °F	⅜	½	—	Adjustable	068N7691
TD1-1 R448A/R449A	⅓	⅓	1						068N7692
TD1-2 R448A/R449A	⅔ ₃	⅓	2						068N7693
TD1-3 R448A/R449A	¾	⅔ ₃	3						068N7694
TD1-4 R448A/R449A	1 ¼	¾	4						068N7695
TD1-5 R448A/R449A	2 ⅞	1	5						068N7696
TDE1-3 R448A/R449A	1	⅔ ₃	3				¼		068N7697
TDE1-4 R448A/R449A	1 ¼	¾	4						068N7698
TDE1-5 R448A/R449A	2 ⅞	1	5						068N7699

*The rated capacity is based on:

Evaporating temp. Te = +41 °F MBP/-20 °F LBP

Condensing temp. Tc = +90 °F

Refrigerant temp. ahead of the value = +82 °F

Included in package: bulb strap

¹ Compatible with R-513A

² Compatible with R-449A

Spare Parts

Code No.	Description	Pack mode	Order multiple
068U3505	Bulb strap; 0.4 mm thick, max. 28 mm diameter tube	Industrial	45
068U3507	Bulb strap; 0.4 mm thick, max. 28 mm diameter tube	Single	1

AK-RC 251 - Optyma™ Control for Walk-in Coolers and Freezers

The Optyma™ **Control** is designed with both upgrades and new room installs in mind. This electronic controller eliminates the need for mechanical thermostats in cooling applications along with defrost timers in freezer applications. The Optyma™ **Control** features a weatherproof enclosure and can reduce installation time by up to 60% and improve room efficiency by up to 30%.

Features AK-RC 251

Simple to wire

Quick and easy to mount

Compatible with standard ¾ in. fittings



Packaged with two NTC sensors: 5 ft. and 10 ft.

Technical data and ordering

AK-RC 251

Power supply	100 - 240VAC, 50/60 Hz, autodetect
Probe temperature range	- 58 to + 211 °F
IP rating	IP65
Display	3 ½ digits, up to 15 symbols/indicators (application dependent)
Inputs	2 NTC temperature sensors (included) 2 digital inputs (1 accepts NTC)
Sensors included in kit	2 NTC, 5 ft & 10 ft
Operating conditions	+ 14 to + 122 °F
Storage conditions	- 22 to +140 °F
Relays	1 x 16A SPDT (AUX 2) • NO: UL - 60730: 5 FLA 30 LRA, 240VAC • NO: UL - 60730: RES 10A, 240VAC • NC: UL - 60370: 5A, 240VAC 2 x 20A SPDT (DEFROST, AUX 1) • NO: UL - 60370: 9 FLA 54 LRA, 240VAC • NO: UL - 60370: RES 12A, 240VAC • NC: UL - 60370: RES 6A, 240VAC 2 x 16A SPST (FAN, COOL) • UL - 60370: 5 FLA 30 LRA, 240VAC • UL - 60370: RES 10A, 240VAC
Internal buzzer	Yes
Communication	Modbus (Connection to Danfoss system manager in development)
Dimensions	11.40 in (W) x 5.55 in (H) x 3.32 in (D)

Technical data and ordering

Optyma Control

Voltage	Danfoss Code No.
100-240VAC, 50/60 Hz, autodetect	080Z5000

Spare Parts and Accessories

Description	Quantity	Danfoss Code No.
Sensor EKS 221 NTC 10K 1.5m cable	150	084N3200
Sensor EKS 221 NTC 10K 8.5m cable	50	084N3208
Sensor EKS 221 NTC 10K 3.5m cable	1	084N3210

For more details on sensors, please consult EKS 221 technical documentation.



Scan this QR Code for more information about the Optyma™ **Control**

ERC 213 - Electronic Temperature Control

The ERC 213 is designed to meet the needs of today's refrigeration technician. Its universal fit, easy setup, and capacity to work with any common temperature sensor make it the obvious choice when replacing an electronic temperature control.

Features ERC 213

Compatible with all common temperature sensors

Kitted with two temperature sensors




Easy to install (attachment clips included)

Quick five-step set up process

Technical data and ordering

ERC 213



Voltage	Applications	Danfoss Code No.
115V 50/60 Hz	Compressor or solenoid for pump down, defrost, and fan	080G3411
220V 50/60 Hz		080G3412



Scan the QR Code for a step-by-step set up video or visit http://bit.ly/ERC213_video

Spare Parts and Accessories

Description	Danfoss Code No.
EKA183B Programming Key, ERC 21X	080G9741
Sensor EKS 221 NTC 10K 3.5m cable	084N3210

Facts

Applications:

- Traditional refrigeration
- Walk-ins
- Chillers

Controls:

- defrost
- fan
- compressor/solenoid for pump down

Temperature range:

- operating conditions: 14 °F to 131 °F
- storage conditions: -40 °F to 158 °F

4 inputs:

- 2 analog
- 1 analog/digital
- 1 digital

Universal Service Thermostat

Danfoss universal service thermostats are kitted with all the necessary accessories for standard applications, ensuring a quick and easy installation. Thanks to the integrated enclosed brake device, these controls can be safely used in isobutene or propane refrigeration systems.



Facts

Applications:

- Traditional refrigeration
- Self-contained refrigerators
- Reach-ins
- Bottle coolers
- Under counter refrigerators
- Eight kit options
- Fixed cut-in and constant differential options available
- Enclosed brake device permits use with flammable refrigerants
- Contact Load: 16 A (120V)

Kit includes:

- Thermostat
- Mounting bracket
- Adjustment knob
- Fasteners

Technical data and ordering



Universal Service Thermostat

Application	Operation mode	Temperature Range (°F)			Sensor type	Capillary tube length (in.)	Competitor Model No.	Danfoss Code No.
		Warm pos. cut-in/cut-out	Middle pos. cut-in/cut-out	Cold pos. cut-in/cut-out				
Refrigerator	Constant Cut-in	38/28	38/19	38/9	Coiled Bulb	39	A12-1506 A12-710 A12-711	077Z7010
Refrigerator	Constant Cut-in	41/29.5	41/23.5	41/17	Straight Sensor	84	A12-700 A12-701 A12-1560 A12-712	077Z7011
Refrigerator/ Freezer	Adaptable Constant Differential	36/26	21.5/9	3/-14	Straight Sensor	42	A30-180 A30-182 A30-184 A30-185	077Z7012
Refrigerator/ Freezer	Adaptable Constant Differential	36/26	21.5/9	3/-14	Straight Sensor	84	A30-181 A30-183 A30-260 A30-263	077Z7013
Low Temp. Freezer	Adaptable Constant Differential	16.5/7	4.0/-7.5	-11/-25.5	Straight Sensor	84	A30-301 A30-307	077Z7014
Low Temp. Freezer	Adaptable Constant Differential	9.5/3	-3/-11	-18.5/-29	Straight Sensor	42	A30-310 A30-311 A30-313	077Z7015
Low Temp. Freezer	Adaptable Constant Differential	9.5/3	-3/-11	-18.5/-29	Straight Sensor	84	A30-308 A30-314	077Z7016
Refrigerator	Adaptable Constant Differential	47/36.5	37.5/25.0	25.5/10.0	Straight Sensor	66	A22-391 A22-1112	077Z7017

All controls feature an enclosed brake device to permit use with flammable refrigerants and are kitted with adjustment knob, installation fasteners, and mounting bracket.

Contact Load		120V	240V
	Full Load Amps	16A	8A
	Locked Rotor Amps	96A	40A


KPU 19 - Thermostats

The KPU 19 thermostats are designed for easy installation and service with bottom and rear knockouts, differential adjustment dial, a tamper-resistant design, and a robust thermoplastic housing.

Features KPU 19



Differential
adjustment dial

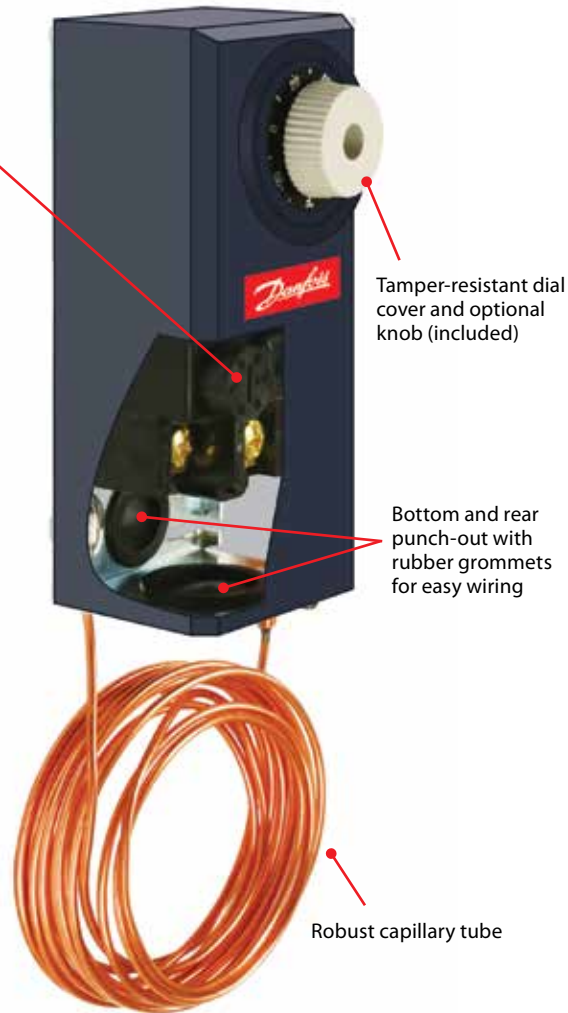

Tamper-resistant dial
cover and optional
knob (included)

Bottom and rear
punch-out with
rubber grommets
for easy wiring

Robust capillary tube

Facts

Applications:

- Traditional refrigeration
 - Air conditioning
 - Ventilating systems
 - Heating systems
- Ambient temperature: -30°F to $+158^{\circ}\text{F}$ (bulb sensor); -30°F to $+140^{\circ}\text{F}$ (room sensor)
 - Switch: Single pole changeover switch (SPDT) and single pole non-changeover switch (SPST)
 - Enclosure: NEMA 1
 - Cable entry: $\frac{7}{8}$ inch cable entry for $\frac{1}{2}$ inch male pipe thread connection (conduit boss) or similar screwed cable entry

Technical data and ordering



KPU 19 Thermostats

KPU Series	Bulb type	Range (°F)	Contact/Reset	Capillary tube length (in.)	Maximum bulb temperature (°F)	Competitor part no.	Danfoss Type	Danfoss Code No.
KPU 19	Remote bulb	–30 to 80	SPDT/Auto	120	140	A19ABC-24C A19ABC-37C A19ABC-74C A19AAC-4C A19AAF-20C	KPU19	060L2150 ¹
KPU 19		–30 to 80	SPST/Auto	80	140	A19AAD-5C A19ABA-40C A19AAD-12C	KPU19	060L2151 ¹
KPU 19	Room bulb	–30 to 80	SPDT/Auto	Room sensor	140	A19BBC-2C A19BAB-3C A19BAC-1C A19BAF-1C	KPU19	060L2152

¹ As 060L1250 is SPDT, 060L2150 can replace competitor parts crossed to both 060L2150 and 060L2151.

Contact Load	Resistive load		0.5~16A/120V AC 0.5~8A/240V AC
	Inductive load	Full load	0.5~16A/120V AC 0.5~8A/240V AC
		Locked rotor	96A/120V AC 48A/240V AC
	Pilot duty		125VA/240V DC



Scan the QR Code for a video of a KPU 19 temperature control replacement or visit http://bit.ly/KPU19_video


KPU 60/70 - Thermostats

KPU 60/70 thermostats are designed to be technician-friendly by functioning as easy and direct replacements for most controls on the market and feature snap-action switches, highly visible contrast scales, fingertip contact testing, and are easily adjustable using a standard refrigeration wrench.

Features KPU 60/70



Easy adjustment of temperature setting with hand knob (all but models with manual reset). Differential setting adjusted with standard refrigeration wrench. A set screw prevents settings from migrating.

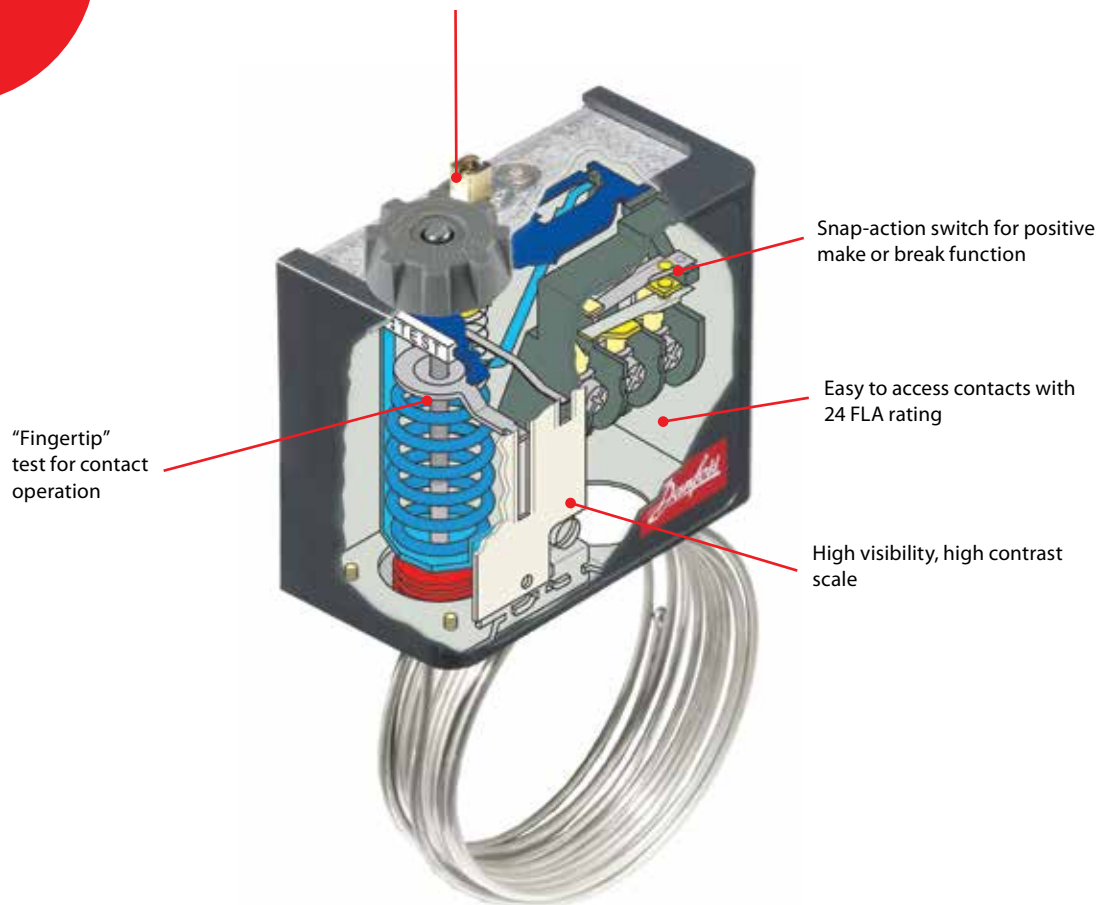

"Fingertip"
test for contact
operation

Snap-action switch for positive
make or break function

Easy to access contacts with
24 FLA rating

High visibility, high contrast
scale

Facts

Applications:

- Traditional refrigeration
 - Air conditioning
 - Ventilating systems
 - Heating systems
- Ambient temperature: -40 °F to +122 °F (175 °F for maximum 2 hours)
 - Switch: Single pole double throw (SPDT)
 - Enclosure: NEMA 1
 - Cable entry: 7/8 inch cable entry for 1/2 inch male pipe thread connection (conduit boss) or similar screwed cable entry



Technical data and ordering

KPU 60/70 Thermostats

Danfoss Type	Bulb type	Range (°F)	Contact/Reset	Capillary tube length (in.)	Differential		Maximum bulb temperature (°F)	Competitor part no.	Danfoss Code No.
					at lowest temp. setting	at highest temp. setting			
KPU 61	Straight capillary tube ¹	–20 to 60	SPDT/Auto	80	10 to 40	2.5 to 13	250	O10-1416 O10-1010 O16-111 O10-1419	060L5201
KPU 61	Remote air coil ¹	–20 to 60	SPDT/Auto	80	10 to 40	2.5 to 13	250	O10-1408 O10-1409 O10-1473 O16-104 O10-1410	060L5203
KPU 62	Room sensor ¹	–20 to 60	SPDT/Auto	Room sensor	10 to 40	2.5 to 13	250	O10-1072 O10-1418 O16-594 O60-101	060L5206
KPU 68	Room sensor ¹	25 to 95	SPDT/Auto	Room sensor	8 to 45	3 to 13	250	O10-1802 O16-595 O10-301 O16-165	060L5215
KPU 73	Remote bulb ²	–15 to 60	SPDT/Auto	80	6.5 to 32	5 to 50	175	O60-100 O60-120	060L5208
KPU 71	Remote bulb ²	25 to 70	SPDT/Auto	80	5.5 to 18	4 to 16	175		060L5218
KPU 77	Remote bulb ²	60 to 140	SPDT/Auto	80	6 to 18	6.3 to 18	265	O60-200 A19AAF-12C A19AAB-4C A19ABB-2C A19ABB-7C	060L5223

¹ Bulb must be installed in colder position than thermostat housing and capillary tube.

² Temperature variations in excess of 70 °F between sensing bulb, housing, and capillary tube will influence scale accuracy.

Contact Load	Resistive load		24A/120V AC 24A/240V AC
	Inductive load	Full load	24A/120V AC 24A/240V AC
		Locked rotor	144A/120V AC 144A/240V AC
	Pilot duty		12W/120V DC




Scan the QR Code for a video of a KPU 60/70 temperature control replacement or visit http://bit.ly/KPU6070_video

KPU - Pressure Switches

KPU pressure switches are designed to be contractor friendly and used in refrigeration and air-conditioning systems to protect the systems from excessively low suction or high discharge pressure. They can also be applied to start and stop compressors and the fans of air-cooled condensers. KPU pressure switches, in single and dual versions, cover a comprehensive range of applications and are designed for use with fluorinated and non-aggressive refrigerants. Most KPU pressure controls can be used with R-410a systems with only a few code numbers.


Features KPU

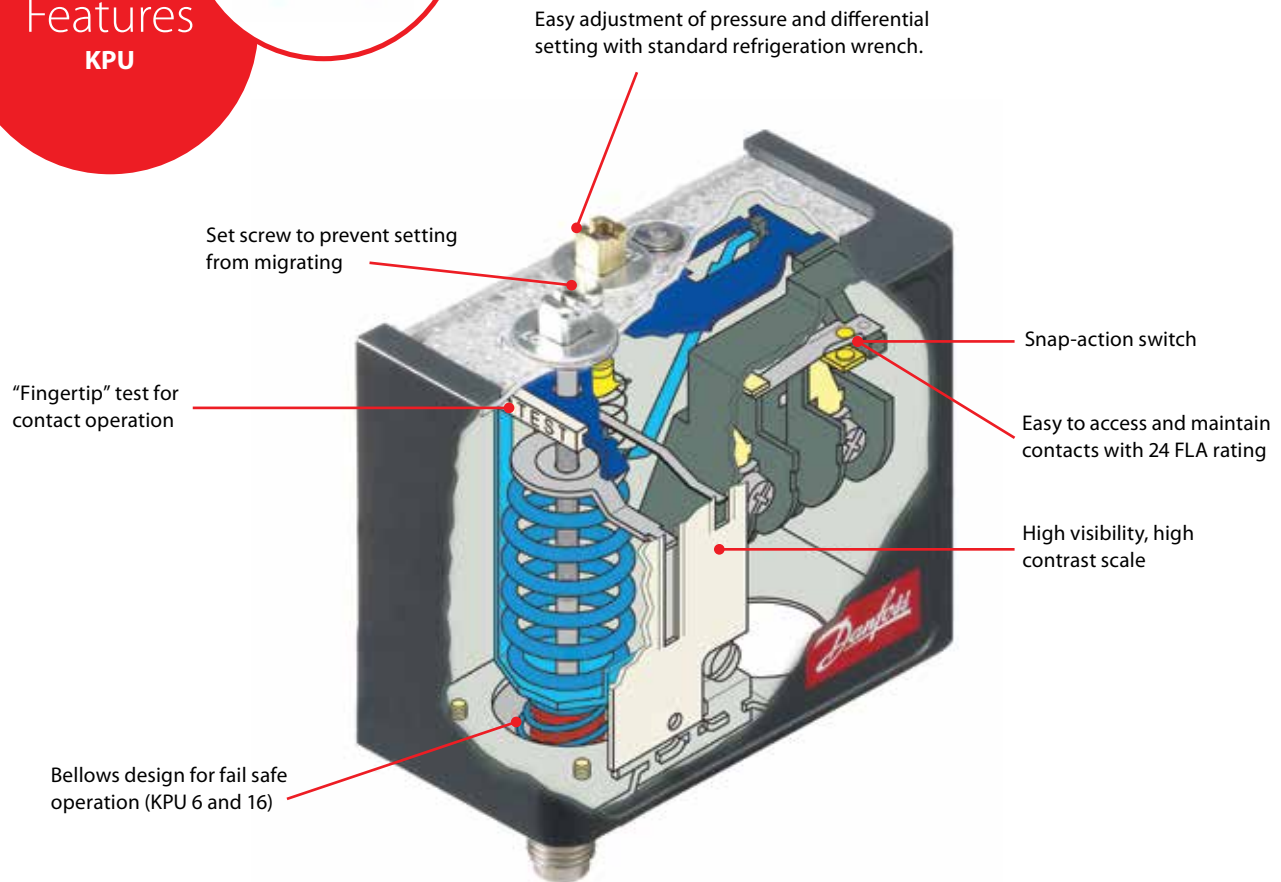

Facts

Applications:

- Commercial air conditioning
- Commercial refrigeration
- Supermarket Refrigeration
- Food processing and storage
- Product Types
 - Low Pressure
 - High Pressure
 - Dual Pressure
- Maximum working/test pressure
 - LP controls: 245/290 psig
 - HP controls: 505/505 psig
 - KPU 6 and 16 on HP side: 675/675 psig
- Refrigerants: R-22, R-134a, R-404A, R-407A, R-407C, R-407F, R-422B, R-422D, R-438A, R-448A, R-449A, R-450A, R-452A, R-507A, R-513A, R-410A (only KPU 1, 2, 6, 16)
- Ambient temperature: -40 to +150 °F (175 °F for max. 2 hours)
- Enclosure: NEMA 1
- Cable entry: 3/8 inch cable entry for 1/2 inch male pipe thread connection (conduit boss) or similar screwed cable entry
- Pressure connection: 1/4 inch M flare or 3/16 inch capillary tube with 1/4 inch flare nut
- KPU 6W, 6B, and 16B feature "dual bellows" on high pressure side to prevent leaks in the case of a bellows rupture



Technical data and ordering

KPU Pressure Switches

Danfoss Type	Pressure	Reset	Contact system	Range (in. Hg/psig)	Differential (psig)	Max. working pressure (psig)	Competitor part no. ¹	Danfoss Code No.	
								¼ in. M flare	36 in. capillary tubes with ¼ in. flare nuts
KPU 1	Low	Automatic	SPDT	6 to 108	10 to 60	250	O10-1483 P70AB-2C	060-5231	060-5233
KPU 2	Low	Automatic	SPST (NO)	6 to 73	6 to 30	250	O10-1402 P70AB-12C P170AB-12C	060-5237	060-5235
KPU 2	Low	Automatic	SPDT	6 to 73	6 to 30	250		060-5239	060-5240
KPU1B	Low	Manual	SPDT	28 to 100	10.2	250		060-5232	060-5234
KPU 5	Fan cycling	Automatic	SPST (NO)	100 to 465	25 to 85	510	O10-2054 P70AA-118C	060-5241	060-5242
KPU 6W ²	High	Automatic	SPDT	100 to 600	58 to 145	675	O16-108 P170CA-400C P70CA-3C	060-5243	060-5245
KPU 6B ²	High	Manual	SPDT	100 to 600	60	675	P70DA-1C	060-5244	060-5246

KPU Dual Pressure Switches

Danfoss Type	Low pressure side		High pressure side		Rest		Contact system (LP/HP)	Max. working pressure (low/high side) (psig)	Competitor part no. ¹	Danfoss Code No.	
	Range (in. Hg/psig)	Differential (psig)	Range (psig)	Differential (psig)	Low pressure side	High pressure side				¼ in. M flare	36 in. capillary tubes with ¼ flare nuts
KPU 15	6 to 108	10 to 60	100 to 465	60	Automatic	Automatic	SPST (NO/NC)	250/510	O12-1549 P170LB-1C	060-5247	060-5248
KPU 15B	6 to 108	10 to 60	100 to 465		Automatic	Manual	SPST (NO/NC)	250/510	P70LB-1C P70MA-1C	060-5249	060-5250
KPU 16B	6 to 108	10 to 60	100 to 600		Convertible ³	Convertible ³	SPDT/ SPST (NO)	250/675	O12-4834 P170LB-1C P70LB-1C P70MA-1C	060-5253	060-5254

¹ Competitor part no. equipped with capillary tube for all but P170LB-1C which has flare connections.

² KPU 6 and the high pressure side of KPU 16 are designed with fail-safe double bellows.

³ Convertible reset controls can be adjusted for either automatic or manual reset. Adjust reset setting to match product being replaced.

All controls are supplied with universal mounting bracket and mounting screws.

Ambient temperature: -40 °F to +122 °F (175 °F for maximum 2 hours).

KPU 1, 2, 6, 16 suitable for all HFC refrigerants, including R-410A.

	120/240 VAC
Alternating Current	
Motor Full Load Amps (FLA)	24
Locked Rotor Amps (LRA)	144
Direct Current	240 V DC: 12W pilot duty


Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Capillary tube; 39 in. with ¼ in. flare coupling nuts on each end	KPU with ¼ in. M flare	060-017166

MP - Differential Pressure Switch / Lube Oil Protection Switch

MP 54 and MP 55 oil differential pressure switches are used to protect refrigeration compressors against low oil pressure. These switches are compatible with HCFC and non-flammable HFC refrigerants.

Features MP

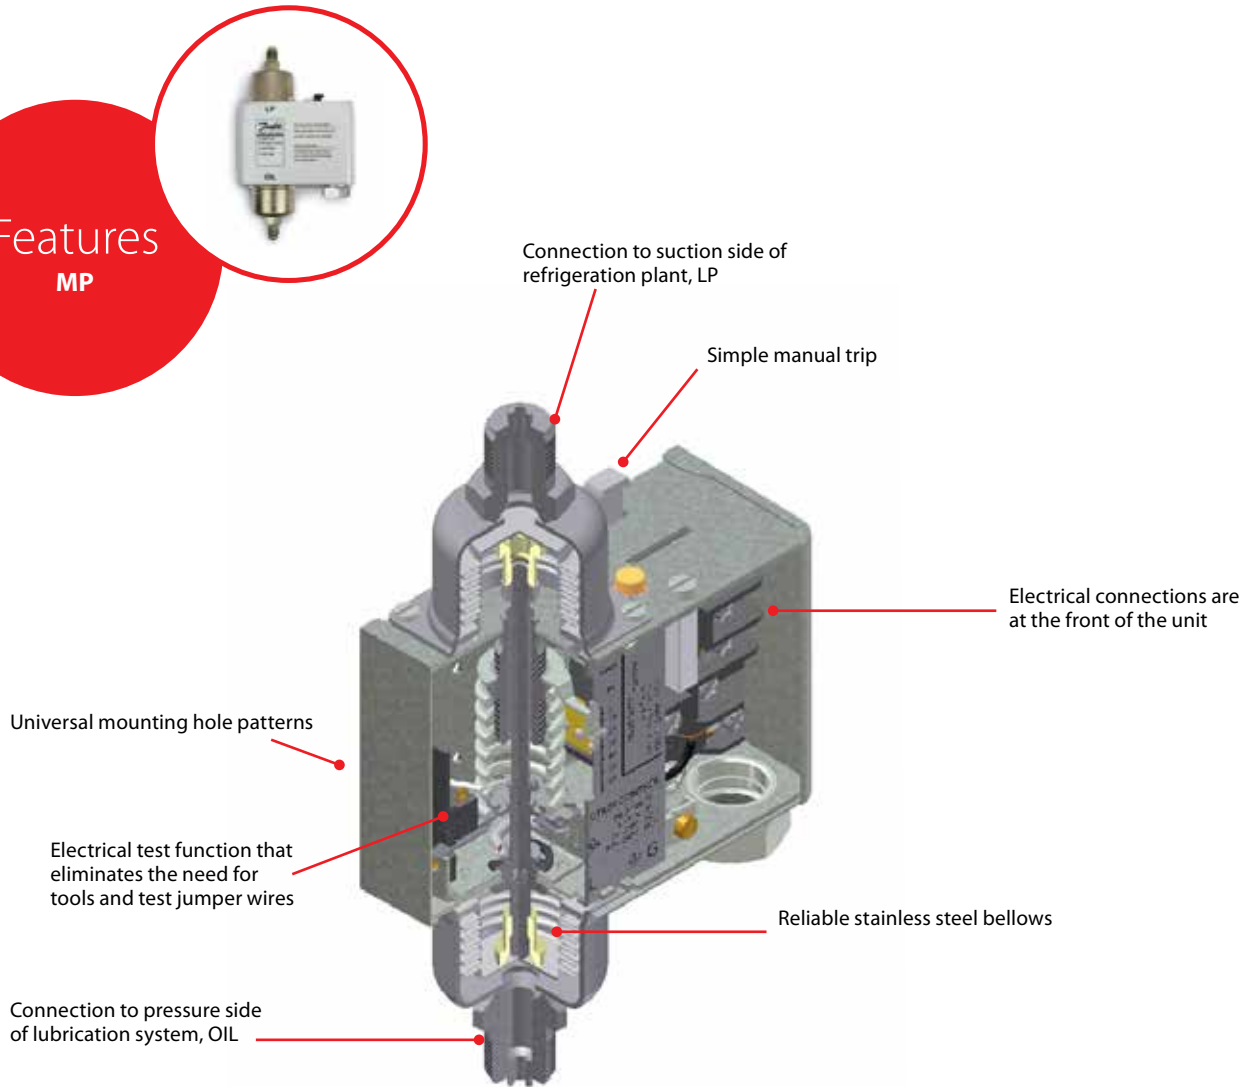

Facts

Applications:

- Commercial refrigeration
- Commercial air conditioning
- Supermarket Refrigeration
- Food processing and storage
- Product Types
 - Fixed Differential (MP 54)
 - Adjustable Differential (MP 55)
- Refrigerants: HCFC and non-flammable HFC refrigerants
- Max working/test pressure: 245 psig/320 psig
- Ambient temperature: The time relay is temperature-compensated in the range -40 °F to +140 °F
- Enclosure: ~NEMA 1
- Cable entry: Integral ½ inch female NPSM swivel cable connector for ½ inch male pipe thread connector.
- Pressure connection: ¼ inch M flare or 36 inch capillary tube with ¼ inch flare nut



Technical data and ordering

MP - Differential Pressure Control / Lube Oil Protection Control

Danfoss Type	Control differential Δp (psig)	LP side Regulation range (in. Hg/psig)	Time relay delay time seconds	Competitor Code Nos.	Danfoss Code No.	Competitor Code Nos.	Danfoss Code No.
				¼ in. M flare		36 in. capillary tubes with ¼ in. flare nuts	
MP54	6	29 to 175	45	P145NCA/B-82C	060B200891	P45NCA-82C 3321-009	060B205091
	9	29 to 175	90	3321-001	060B200266		
	9	29 to 175	120	P145NCA/B-12C P31-5827 3321-001	060B200391 ²	P45NCA-12C P30-5826 3321-010	060B205391 ²
MP55	4.3 to 65	29 to 175	45			P288AA-18/2C P30-3601 3321-014/5 ³	060B205491
	4.3 to 65	29 to 175	60	P128AA-2C	060B201291 ¹		
	4.3 to 65	29 to 175	120	P128AA-17C	060B200791	P28AA-17C P28NA-5C P30-3801 3321-014/5 ³	060B205791

¹ With glow lamp that remains on during normal operation of compressor.

Note: When time delay is energized which also means that min. permissible oil pressure (differential Δp) is reached, light goes out.

² Three-wire hook-up with jumper that is provided in the box with control.

³ The 3321 series controls feature adjustable delay and fixed differential. The differential for 3321-014 controls is set at 15 psig and 3321-015 is at 30 psig. Select control with appropriate delay time.


Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Capillary tube; 39 in. with ¼ in. flare coupling nuts on each end	MP with ¼ in. M flare	060-017166

EVR Version 2 - Solenoid Valves

EVR Version 2 solenoid valves are direct or servo-operated solenoid valves for liquid, suction, and hot gas lines. They are suitable for all refrigeration, freezing, and air conditioning applications and are compatible with fluorinated refrigerants. The valves can be delivered as normally open or closed as well as with or without manual operation.

Features EVR Version 2

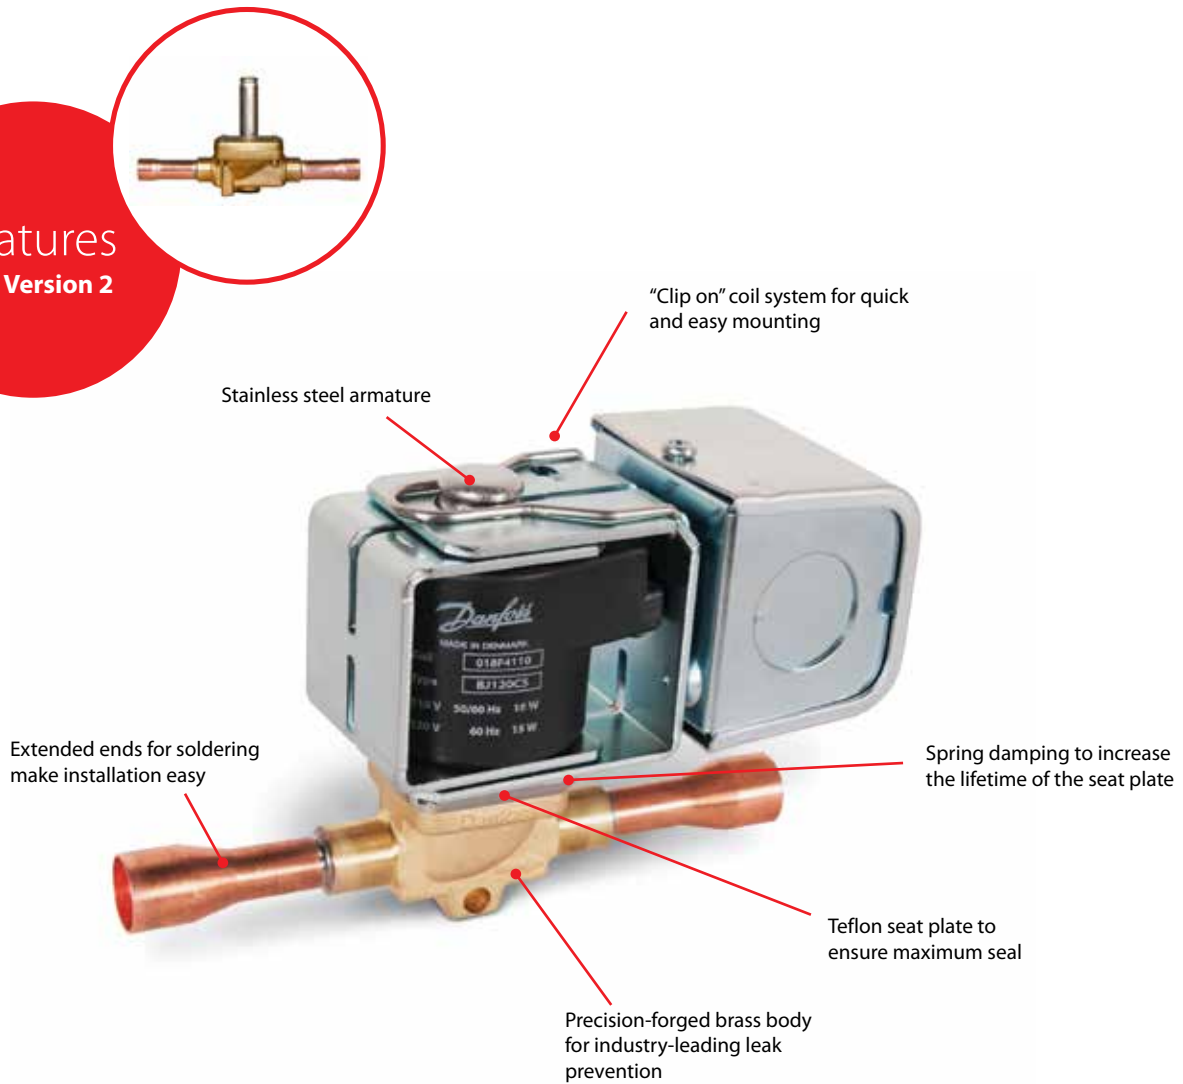


Facts

Applications:

- Commercial refrigeration
- Freezers
- Air conditioning units
- Commercial refrigeration
- Supermarket Refrigeration
- Refrigerants: Use with any fluorinated refrigerant
- Maximum working pressure:
 - EVR 2–EVR 8: 655 psig
 - EVR 10: 655 psig
 - EVR 15–EVR 40: 655 psig
- Temperature range: -40 °F to +220 °F
- Connections:
 - Flare connections up to 5/8 inch
 - Solder connections up to 2 1/8 inch
- Available in normally open and normally closed
- Available with or without manual stem
- Coil available with junction box (NEMA 2) and conduit boss (NEMA 4)

Technical data and ordering

EVR Version 2 Solenoid valves



Danfoss Type	Rated capacity (liquid tons)			Solder ODF connection (in.)	Port size (in.)	Max. working pressure (psig)	Danfoss Code No. ¹	
	R-22	R-134a	R-404A				with manual stem	without manual stem
	R-407C		R-507A					
EVR 3	1.66	1.54	1.07	¼	⅜	655		032F1206
EVR 3	1.66	1.54	1.07	⅜	⅜	655		032F1204
EVR 6	5.47	5.07	3.51	⅜	15/64	655	032L7116	032L1212
EVR 6	5.47	5.07	3.51	½	15/64	655	032L7144	032L1209
EVR 8	6.52	6.03	4.18	½	5/16	655	032L7148	032L7121
EVR 10	11.50	10.64	7.38	⅝	⅜	655	032L7149	032L1214
EVR 15	17.71	16.39	11.37	⅝	9/16	655		032L1228
EVR 18	23.18	21.46	14.88	7/8	19/32	655	032L1004	
EVR 20	36.76	34.04	23.60	7/8	7/8	655	032L1254	032L1240
EVR 22	41.93	38.82	26.92	1 ⅜	15/16	655	032L7137	032L7145
EVR 25	60.19	55.72	38.64	1 ⅜	1	655	032L2207	032L2208
EVR 32	102.85	95.23	66.03	1 ⅝	7/8	655	032L1103	032L1104

¹ Valve body is normally closed (NC) and excludes coil. Additional code nos. available in Coolselector or contact Danfoss.

Coils for Solenoid Valves



Voltage (V)	Frequency (Hz)	Power consumption (W)	Danfoss Type (junction box) ²	Length of wire (in.)	Danfoss Code no.	Danfoss Type (conduit boss) ³	Length of wire (in.)	Danfoss Code No.
24	50/60	14	BJ024CS	7	018F4100	BX024CS	18	018F4102
110	50/60	16	BJ120CS	7	018F4110	BX120CS	18	018F4112
120	60	15						
208-240	60	14	BJ240CS	7	018F4120	BX240CS	18	018F4122
230	50	17						

² Enclosure rating for BJ coils is NEMA 2 ~ IP 12-32

³ Enclosure rating for BX coils is NEMA 4 ~ IP 54

Dual Voltage/Dual Frequency Coil



Coil Type	Voltage (V)	Frequency (Hz)	Power consumption (W)	Danfoss Type (junction box) ⁴	Length of wire (in.)	Danfoss Code no.	Danfoss Type (conduit boss) ⁵	Length of wire (in.)	Danfoss Code No.
EVR	110	50	12	BT240CS	7	018F4180	BU240CS	7	018F4181
	110-120	60							
	230	50							
	208-240	60							

⁴ Enclosure rating for BT coils is NEMA 2 ~ IP 12-32

⁵ Enclosure rating for BU coils is NEMA 4 ~ IP 54


Spare Parts and Accessories

Description	Version(s) applied to	Type(s) applied to	Danfoss Code No.
Permanent magnet coil for servicing and testing	1, 2	all	018F0091
Service kit (NC); O-ring, (4) screws, armature assembly, rubber gasket, compression spring	1, 2	EVR 3	032F0181
Seal kit (NC); O-ring for armature tube, rubber gasket, O-ring for steel cover, support ring	1	EVR 6, 8	032F8165
Service kit (NC); diaphragm assembly, O-ring for armature tube, (4) screws T20, (4) screws T15, armature assembly, rubber gasket, O-ring for steel cover, support ring, compression spring	1	EVR 6, 8	032F8166
Seal kit (NC/NO); O-ring for armature tube, rubber gasket, support ring	2	EVR 6, 8	032L0548
Service kit (NC); diaphragm assembly, O-ring, (4) screws, armature assembly, rubber gasket, support ring, compression ring	2	EVR 6, 8	032L0550
Service kit (NC); diaphragm assembly, O-ring, (4) screws, armature assembly, rubber gasket, compression spring	1	EVR 10	032F0185
Service kit (NC); diaphragm assembly, O-ring, (4) screws, armature assembly, rubber gasket, compression spring	2	EVR 10	032L0552
Seal kit (NC/NO); O-ring for armature tube, (3) rubber gasket (1 ea. for EVR 10, 15, 20) (4) refrigeration gasket (2 ea. For EVR 15, 20)	1, 2	EVR 10, 15, 20	032F8196
Service kit (NC); diaphragm assembly, O-ring, (4) screws, armature assembly, rubber gasket, (2) refrigeration gasket (flange connections), compression spring	2	EVR 15, 18, 20, 22	032L0554
Service kit (NC); diaphragm assembly, O-ring, (4) screws, armature assembly, rubber gasket, refrigeration gasket, compression spring	1	EVR 15, 18	032F0187
Service kit (NC); diaphragm assembly, O-ring, (4) screws, armature assembly, rubber gasket, refrigeration gasket, compression spring	1	EVR 20, 22	032F0189
Manual spindle; spindle assembly	1	EVR 20, 22	032F0193
Seal kit (NC); (2) Al. gasket, (3) O-rings, rubber gasket	1, 2	EVR 25	032F2326
Piston service kit (NC); (2) O-ring, compression spring, piston assembly, insert block, rubber gasket, piston ring	1, 2	EVR 25	032F3236
Piston service kit (NC); (5) O-rings, Al. gasket, piston assembly, insert block, piston ring, compression spring, refrigeration gasket	1, 2	EVR 32	042H0172
Pilot service kit (NC); (2) Al. gaskets, O-ring, orifice, armature tube, armature assembly, compression spring	1, 2	EVR 25, 32	042H0165
Seal kit (NC); (4) O-rings, (2) Al. gaskets	1, 2	EVR 32	032F2327

To determine the version of EVR, read the code number engraved on the armature. Codes beginning with 032F, 032G and 042H are V1; codes beginning with 032L are V2. Kits for types not included in catalog may be available; contact Danfoss for more information.

WVFX - Pressure Controlled Water Valves

Pressure controlled water valves type WVFX are used for regulating the flow of water in refrigeration systems with water cooled condensers. Water valves regulate water flow and thereby maintain constant condensing pressure. At shut-down, cooling water flow is shut off automatically. WVFX valves are designed as wide-range, general purpose water valves, and are particularly popular among contractor customers for their easy to set scale and exceptional set point stability.

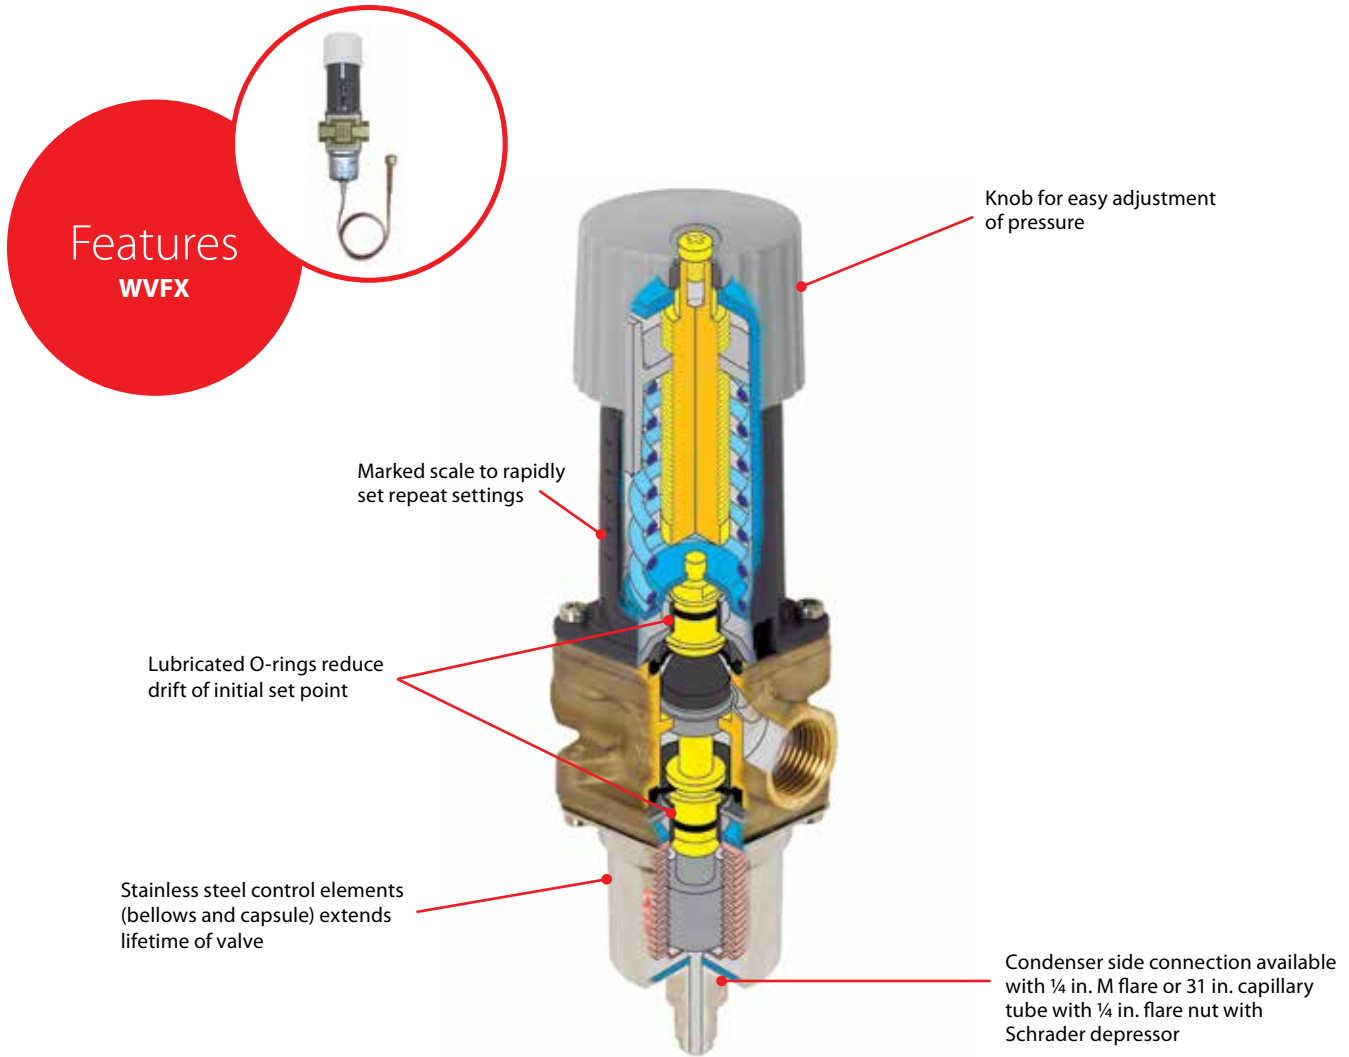

Facts

Applications:

- Refrigeration systems with water-cooled condensers
- Refrigerants: HCFC and HFC
- Connections
 - Water side: 3/8 inch to 1 inch (NPT)
 - Condenser side: 1/4 inch M flare or 3/16 inch capillary tube with 1/4 inch flare nut with Schrader depressor
- Max working/test pressure
 - Water side: 380/420 psig or 655/870 psig
 - Condenser side: 230/350 psig
- Opens on rising condensing pressure



Technical data and ordering

WVFX - Pressure Controlled Water Valves

Danfoss Type	Competitor Part No.	Connection		Range (psig)	Condenser side		Water side		Flow coefficient, Cv valve (gal/min)	Danfoss Code No.
		Water side (NPT)	Condenser side		Maximum working pressure (psig)	Maximum test pressure (psig)	Maximum working pressure (psig)	Maximum test pressure (psig)		
WVFX 10	V46AA-1C ¹	3/8	1/4 in. M flare	60 to 333	380	420	230	350	1.6	003N5006
WVFX 10	V46AA-1C	3/8	31 in. capillary tube with 1/4 in. flare nut ²						1.6	003N5025
WVFX 15	V46AB-1C ¹	1/2	1/4 in. M flare						2.2	003N6006
WVFX 15	V46AB-1C	1/2	31 in. capillary tube with 1/4 in. flare nut ²						2.2	003N6025
WVFX 20	V46AC-1C ¹	3/4	1/4 in. M flare						3.9	003N7006
WVFX 20	V46AC-1C	3/4	31 in. capillary tube with 1/4 in. flare nut ²						3.9	003N7025
WVFX 25	V46AD-1C ¹	1	1/4 in. M flare						6.4	003N8006
WVFX 25	V46AD-1C	1	31 in. capillary tube with 1/4 in. flare nut ²						6.4	003N8025

¹ Competitor valve equipped with capillary tube as in code no. directly below. See below for capillary tube spare part (code no. 060-017166) to attach to this code no.

² Schrader depressor installed at end of capillary tube.

Length of valve from top of knob to bottom of control element is 8.07 in. for WVFX 10, 15, 20, and 8.46 in. for WVFX 25.

Temperature range: -13 to +265 °F

Maximum differential pressure: 145 psig

WVFX – Pressure Controlled Water Valves for High Pressure Refrigerants

Danfoss Type	Competitor Part No.	Connection		Range (psig)	Condenser side		Water side		Flow coefficient, Cv valve (gal/min)	Danfoss Code No.
		Water side (NPT)	Condenser side		Maximum working pressure (psig)	Maximum test pressure (psig)	Maximum working pressure (psig)	Maximum test pressure (psig)		
WVFX 10	V246GA1-001C	3/8	1/4 in. M flare	218 to 420	655	870	232	348	1.6	003N1810
WVFX 15	V246GB1-001C	1/2							2.2	003N2810
WVFX 20	V246GC1-001C	3/4							3.9	003N3810
WVFX 25	V246GD1-001C	1							6.4	003N4810

Temperature range: -13 to 265 °F

Maximum differential pressure: 145 psig

Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Rebuild kit; valve disc, (2) O-rings, (8) screws, (2) diaphragms, grease, and key	WVFX 10,15	003N4006
Rebuild kit; valve disc, (2) O-rings, (8) screws, (2) diaphragms, grease, and key	WVFX 20	003N4007
Rebuild kit; valve disc, (2) O-rings, (8) screws, (2) diaphragms, grease, and key	WVFX 25	003N4008
Capillary tube; 39 in. (1m) with 1/4 in. (6mm) flare coupling nuts on each end	WVFX with 1/4 M flare	060-017166
Bracket for WVFX 10–25	all	003N0388


KVP/KVL/KVR/NRD/KVC/CPCE - Pressure Regulators

Danfoss has a variety of pressure regulators to control the low and high pressure sides and efficient function of a refrigeration system under varying load conditions.

Pressure regulators include:


- Evaporator Pressure Regulator (KVP)
- Crankcase Pressure Regulator (KVL)
- Condensing Pressure Regulator (KVR)
- Differential Pressure Regulator (NRD)
- Hot Gas Bypass Valves (KVC/CPCE)

KVP/KVL/KVR/
NRD/KVC/CPCE

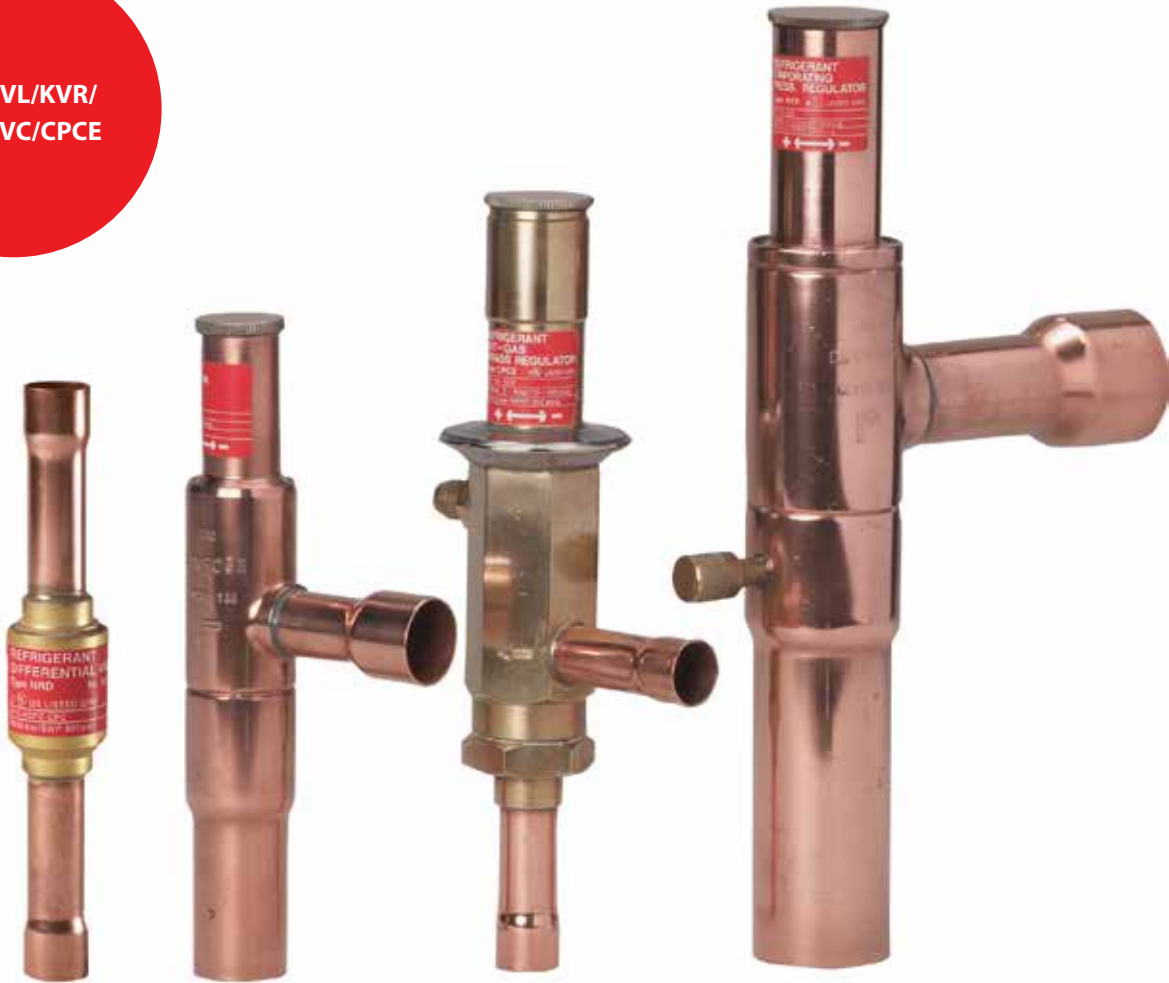

Facts

- All valves available for use with any CFC, HCFC, or HFC refrigerant, except R-410A
- Very stable and accurate pressure regulation
- Hermetic brazed construction 100% leak tested
- Available with flare and ODF solder connections
- Stainless steel bellows for extended lifetime
- Built-in valve seat dampening design
- Pressure regulation side
 - KVP/KVR—opens on a rise in pressure
 - KVC/KVL—opens on a fall in pressure



Technical data and ordering

KVP/KVL/KVR/NRD/KVC/CPCE - Pressure Regulators

Application	Danfoss Type	Rated capacity (tons)				Solder ODF connection (in.)	Setting range (psig)	Factory setting (psig)	Maximum working pressure (psig)	Maximum test pressure (psig)	Minimum temp. of medium (°F)	Maximum temp. of medium (°F)	Danfoss Code No.
		R-22	R-134a	R-404A	R-407C								
Evaporating Pressure Regulator	KVP 12	1.30	0.90	1.20	1.20	½	0 to 80	29	260	286	-50	265	034L0023
	KVP 15	1.30	0.90	1.20	1.20	¾	0 to 80	29	260	286	-50	265	034L0029
	KVP 22	1.30	0.90	1.20	1.20	¾	0 to 80	29	260	286	-50	265	034L0025
	KVP 28	2.80	1.90	2.40	2.60	1 ½	0 to 80	29	260	286	-50	265	034L0026
	KVP 35	2.80	1.90	2.40	2.60	1 ¾	0 to 80	29	260	286	-50	265	034L0032
Crankcase Pressure Regulator	KVL 12	1.20	0.80	1.00	1.10	½	3 to 87	29	260	286	-75	266	034L0043
	KVL 15	1.20	0.80	1.00	1.10	¾	3 to 87	29	260	286	-75	266	034L0049
	KVL 22	1.20	0.80	1.00	1.10	¾	3 to 87	29	260	286	-75	266	034L0045
	KVL 28	4.10	2.60	3.40	3.80	1 ½	3 to 87	29	260	286	-75	266	034L0046
	KVL 35	4.10	2.60	3.40	3.80	1 ¾	3 to 87	29	260	286	-75	266	034L0052
Condensing Pressure Regulator	KVR 12	Liquid: 12.70 Hot gas: 4.13	Liquid: 11.80 Hot gas: 3.03	Liquid: 8.20 Hot gas: 3.27	Liquid: 13.80 Hot gas: 4.50	½	73 to 254	145	406	450	-50	266	034L0093
	KVR 15	Liquid: 12.70 Hot gas: 4.13	Liquid: 11.80 Hot gas: 3.03	Liquid: 8.20 Hot gas: 3.27	Liquid: 13.80 Hot gas: 4.50	¾	73 to 254	145	406	450	-50	266	034L0097
	KVR 22	Liquid: 12.70 Hot gas: 4.13	Liquid: 11.80 Hot gas: 3.03	Liquid: 8.20 Hot gas: 3.27	Liquid: 13.80 Hot gas: 4.50	¾	73 to 254	145	406	450	-50	266	034L0094
	KVR 28	Liquid: 32.60 Hot gas: 10.93	Liquid: 30.20 Hot gas: 8.04	Liquid: 20.90 Hot gas: 8.66	Liquid: 35.50 Hot gas: 11.91	1 ½	73 to 254	145	406	450	-50	266	034L0095
	KVR 35	Liquid: 32.60 Hot gas: 10.93	Liquid: 30.20 Hot gas: 8.04	Liquid: 20.90 Hot gas: 8.66	Liquid: 35.50 Hot gas: 11.91	1 ¾	73 to 254	145	406	450	-50	266	034L0100
Differential Pressure Regulator	NRD 12s ¹					½	73 to 254	145	667	870	-50	266	020-1132
Hot Gas Bypass	KVC 12	2.14	1.36	2.02	2.31	½	3 to 87	29	406	450	-50	266	034L0143
	KVC 15	4.17	2.65	3.93	4.50	¾	3 to 87	29	406	450	-50	266	034L0147
	KVC 22	5.35	3.41	5.04	5.78	¾	3 to 87	29	406	450	-50	266	034L0144
	CPCE 12	6.20	4.30	6.30	6.70	½	0 to 87	5.8	406	450	-58	285	034N0082
	CPCE 15	9.20	6.30	9.10	9.90	¾	0 to 87	5.8	406	450	-58	285	034N0083
	CPCE 22	12.20	8.40	12.10	12.20	¾	0 to 87	5.8	406	450	-58	285	034N0084


¹ NRD generally used in conjunction with a KVR to regulate the condensing pressure.

Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Schrader valve	all KVP, KVR	034L0006

DCL/DCB/DAS/DCR - Filter Driers

Danfoss filter driers function as simple drop-in replacements for most driers sold in the aftermarket or installed on equipment by manufacturers. All Danfoss filter driers are constructed with a solid core design to maximize moisture removal while minimizing pressure drop. These driers use a mixture of molecular sieve and activated alumina to both adsorb system moisture and capture acid and prevent solid contaminants from entering the system. The Danfoss 1.5 cubic inch hermetic filter drier can be used in hydrocarbon systems to provide exceptional protection while minimizing charge requirements.

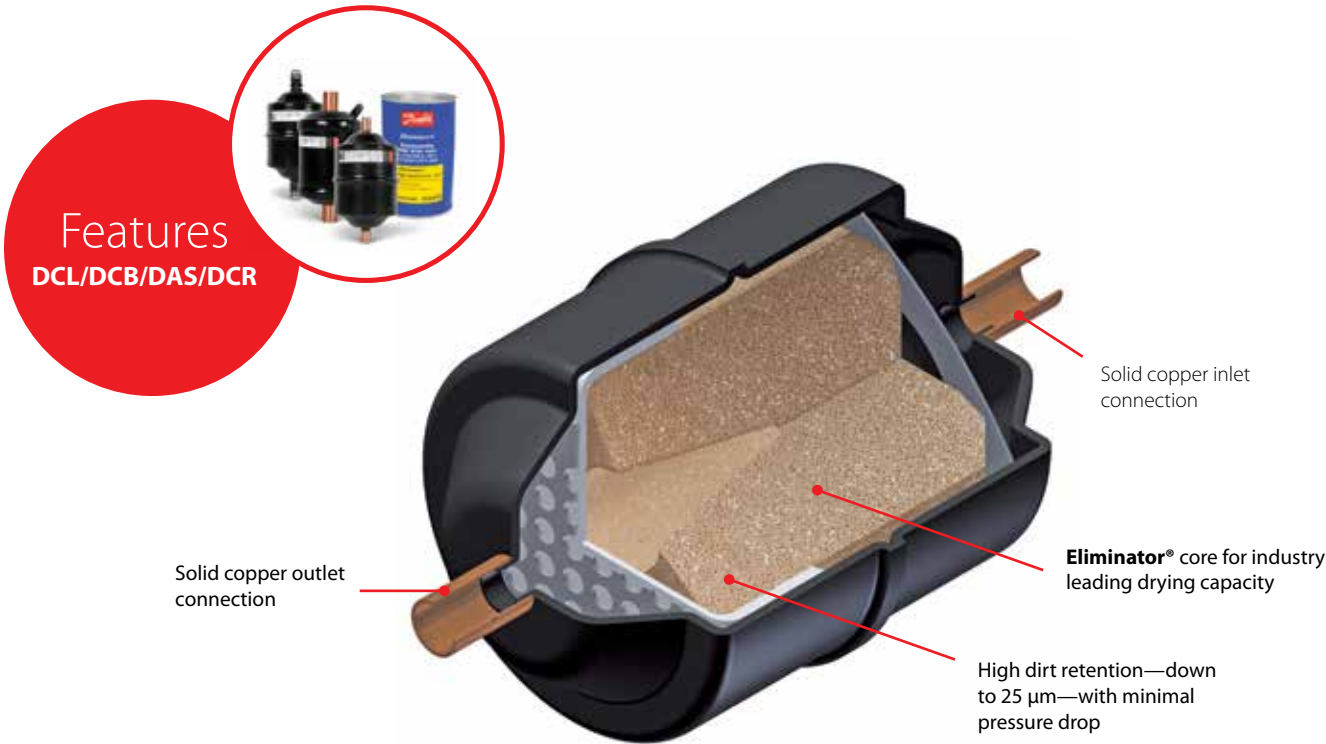

Nomenclature / Model No.

D

Filter drier

A

Solid Core

A: Core with 30% molecular sieve/
70% activated alumina (burn-out)
C: Core with 80% molecular sieve/
20% activated alumina
M: Core with 100% molecular sieve

S

Application

B: Bi-flow
L: Liquid line
S: Suction line

16

Size (volume)

1.5: 1.5 in.³
03: 3 in.³
05: 5 in.³
08: 8 in.³
16: 16 in.³
30: 30 in.³
41: 41 in.³
60: 60 in.³
75: 75 in.³

4

Connection

(filter connection in 1/8 in. increments)
2/CAP: 1/4 in. inlet x cap tube outlet
2: 1/4 in.
2.5: 5/16 in.
3: 3/8 in.
4: 1/2 in.
5: 5/8 in.
6: 3/4 in.
7: 7/8 in.
9: 1 1/8 in.

s

Connection type

(blank): Flare connection
s: Solder connection

VV

Access valves

	Inlet	Outlet
(blank)	none	none
V	Schrader valve	none
VV	Schrader valve	Schrader valve

Technical data and ordering

DCL/DCB Liquid Line/Bi-flow Filter Driers

Danfoss Type	Connection (in.)	Max. working pressure (psig)	Drying capacity (lbs. of refrigerant) ²								Liquid capacity (tons) ²				Danfoss Code No.
			R-134a		R-404A		R-22		R-410A		R-134a	R-404A	R-22	R-410A	
			75 °F	125 °F	75 °F	125 °F	75 °F	125 °F	75 °F	125 °F					
DCL 1.52/2.8mms	¼ solder	667	5.10	4.60	5.30	5.10	5.10	4.60	4.60	4.20	0.80	0.50	0.90	0.80	023Z8255
DCL 032s	¼ solder	667	8.50	8.00	9.10	8.70	8.60	8.00	7.80	7.20	1.90	1.42	2.12	2.11	023Z5013 ¹
DCL 032	¼ flare	667	8.50	8.00	9.10	8.70	8.60	8.00	7.80	7.20	1.90	1.42	2.12	2.11	023Z5000 ¹
DCL 052s	¼ solder	667	13.60	12.80	14.60	13.80	13.80	12.70	12.40	11.40	2.18	1.60	2.40	2.37	023Z5018
DCL 052	¼ flare	667	13.60	12.80	14.60	13.80	13.80	12.70	12.40	11.40	2.18	1.60	2.40	2.37	023Z5002
DCL 053s	⅜ solder	667	13.60	12.80	14.60	13.80	13.80	12.70	12.40	11.40	3.66	2.79	4.10	4.15	023Z5019
DCL 053	⅜ flare	667	13.60	12.80	14.60	13.80	13.80	12.70	12.40	11.40	3.66	2.79	4.10	4.15	023Z5003
DCL 082s	¼ solder	667	21.70	20.50	23.30	22.10	22.00	20.30	19.80	18.20	2.18	1.55	2.37	2.28	023Z5022
DCL 082	¼ flare	667	21.70	20.50	23.30	22.10	22.00	20.30	19.80	18.20	2.18	1.55	2.37	2.28	023Z5004
DCL 083s	⅜ solder	667	21.70	20.50	23.30	22.10	22.00	20.30	19.80	18.20	4.03	3.12	4.56	4.65	023Z5023
DCL 084s	½ solder	667	21.70	20.50	23.30	22.10	22.00	20.30	19.80	18.20	8.14	6.07	9.03	8.99	023Z5026
DCL 084	½ flare	667	21.70	20.50	23.30	22.10	22.00	20.30	19.80	18.20	8.14	6.07	9.03	8.99	023Z5006
DCL 162	¼ flare	667	47.70	45.10	51.30	48.60	48.30	44.70	43.50	40.10	2.18	1.54	2.36	2.28	023Z5007
DCL 163s	⅜ solder	667	47.70	45.10	51.30	48.60	48.30	44.70	43.50	40.10	4.64	3.18	4.95	4.67	023Z5029
DCL 163	⅜ flare	667	47.70	45.10	51.30	48.60	48.30	44.70	43.50	40.10	4.64	3.18	4.95	4.67	023Z5008
DCL 164s	½ solder	667	47.70	45.10	51.30	48.60	48.30	44.70	43.50	40.10	9.15	6.69	10.07	9.90	023Z5032
DCL 165s	⅝ solder	667	47.70	45.10	51.30	48.60	48.30	44.70	43.50	40.10	12.69	10.41	14.74	15.59	023Z5033
DCL 165	⅝ flare	667	47.70	45.10	51.30	48.60	48.30	44.70	43.50	40.10	12.69	10.41	14.74	15.59	023Z5010
DCL 303s	⅜ solder	667	100.50	95.00	108.00	102.40	101.80	94.10	91.60	84.40	4.46	3.00	4.72	4.40	023Z0030
DCL 303	⅜ flare	667	100.50	95.00	108.00	102.40	101.80	94.10	91.60	84.40	4.46	3.00	4.72	4.40	023Z0012
DCL 304s	½ solder	667	100.50	95.00	108.00	102.40	101.80	94.10	91.60	84.40	9.24	7.11	10.41	10.58	023Z0031
DCL 304	½ flare	667	100.50	95.00	108.00	102.40	101.80	94.10	91.60	84.40	9.24	7.11	10.41	10.58	023Z0013
DCL 305s	⅝ solder	667	100.50	95.00	108.00	102.40	101.80	94.10	91.60	84.40	13.00	10.51	14.99	15.72	023Z0032
DCL 305	⅝ flare	667	100.50	95.00	108.00	102.40	101.80	94.10	91.60	84.40	13.00	10.51	14.99	15.72	023Z0014
DCL 307s	⅞ solder	667	100.50	95.00	108.00	102.40	101.80	94.10	91.60	84.40	18.27	15.34	21.44	23.05	023Z0034
DCL 415s	⅝ solder	667	139.50	131.90	150.00	142.20	141.30	130.70	127.30	117.30	15.78	11.9	17.61	17.66	023Z0105
DCL 417s	⅞ solder	500	139.50	131.90	150.00	142.20	141.30	130.70	127.30	117.30	18.98	16.01	22.32	24.08	023Z0106
DCL 607s	⅞ solder	667	200.90	189.90	216.00	204.80	203.50	188.20	183.30	168.90	19.93	19.94	25.16	30.71	023Z0036
DCB 083s	⅜ solder	667	15.60	14.70	16.70	15.80	15.60	14.50	14.10	13.00	2.10	1.50	2.30	2.30	023Z1433
DCB 163s	⅜ solder	667	29.30	27.70	31.50	29.90	29.70	27.50	26.80	24.60	5.10	3.70	5.70	5.70	023Z1437
DCB 164s	½ solder	667	29.30	27.70	31.50	29.90	29.70	27.50	26.80	24.60	8.00	5.70	9.10	9.10	023Z1436
DCB 165s	⅝ solder	667	29.30	27.70	31.50	29.90	29.70	27.50	26.80	24.60	10.60	8.30	11.40	11.40	023Z1435

¹ Wire mesh in filter drier outlet.

DAS Suction Line Filter Driers

Danfoss Type	Connection (in.)	Max. working pressure (psig)	Rated capacity (tons) ²			Acid capacity (oz.)	Danfoss Code No.
			R-134a	R-404A	R-22		
					R-410A		
DAS 164sVV	½ solder	500	1.70	2.40	6.30	0.30	023Z1009
DAS 165sVV	⅝ solder		2.70	3.70	4.30	0.30	023Z1010
DAS 166sVV	¾ solder		3.40	4.90	5.70	0.30	023Z1011
DAS 167sVV	⅞ solder		3.90	5.40	6.30	0.30	023Z1012
DAS 306sVV	¾ solder		4.00	5.40	6.30	0.64	023Z1014
DAS 307sVV	⅞ solder		4.60	6.30	7.40	0.64	023Z1015
DAS 309sVV	1⅛ solder		5.70	7.70	8.90	0.64	023Z1016
DAS 419sVV	1⅞ solder		6.30	8.60	10.00	0.86	023Z1018

² For rated capacities for R-290, R-600, R-448A, R-449A, R-452A, and other HFO, HC, HFC, and HCFC refrigerants not listed, see Coolselector or contact Danfoss.

DCR Filter Drier Cores

Danfoss Type	Material	Danfoss Code No.
DCR core insert, type 48-DM solid core	100% molecular sieve	023U1392
DCR core insert, type 48-DC solid core	80% molecular sieve & 20% activated alumina	023U4381
DCR core insert, type 48-DA solid core	30% molecular sieve & 70% activated alumina	023U5381
DCR core insert, type 48-F strainer		023U1921

DCL with Schrader valve - Filter Driers

The Danfoss 1.5 hermetic filter driers include a Schrader valve, making servicing the system easy and convenient, and convertible outlet for fitting on capillary tube or ¼ inch system connection. Thanks to the solid core, Danfoss ELIMINATOR® filter driers offer exceptional drying capacity to protect the system against harmful acids and moisture. The DCL 1.5 cubic inch filter drier with Schrader makes an excellent upgrade in replacing loose bead driers due to superior drying and small internal volume.



Facts

Applications:

- Traditional refrigeration
- Air conditioning units
- Transport refrigeration
- Connections:
 - Inlet: ¼ inch solder and ¼ inch service port
 - Outlet: Capillary tube outlet can be trimmed down to ¼ inch
- Refrigerants: R-22, R-32, R-134a, R-404A, R-410A, R-407C/F, R-23, R-1234yf, R-1234ze, R-452A, R-444B, R-449A, R-448A, R-450A, R-507. For other refrigerants, please contact Danfoss.
- Available with 1.5, 3, and 5 cubic inch solid core volumes
- 80% molecular sieve and 20% activated alumina core

Technical data and ordering


DCL with Schrader valve - Filter Drier



Danfoss Type	Connection inlet (in.)/ outlet	Max. working pressure (psig)	Drying capacity (lbs. of refrigerant)										Liquid capacity (tons)					Danfoss Code No.
			R-134a		R-404A		R-22		R-407C		R-410A		R-134a	R-404C	R-22	R-407C	R-410A	
			75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F	75°F	125°F						
DCL 1.52/ CAPsV	¼"/capillary tube	667	5.2	4.8	5.5	5.2	5.3	4.9	5.1	4.7	4.7	4.2	1.0	0.7	1.1	1.0	1.0	023Z8261
DCL 032/ CAPsV	¼"/capillary tube	667	8.4	7.7	8.8	8.3	8.5	7.8	8.2	7.6	7.6	6.8	1.2	0.8	1.3	1.2	1.2	023Z5174
DCL 052/ CAPsV	¼"/capillary tube	667	13.5	12.4	14.1	13.4	13.6	12.5	13.1	12.1	12.3	10.9	1.2	0.8	1.3	1.2	1.2	023Z5181

GBC V2 - Ball Valves

Danfoss GBC ball valves are manually operated shut-off valves suitable for bi-directional flow. The design, weld, and choice of the sealing material enable these ball valves to meet the most demanding requirements and provide years of leak-free performance.

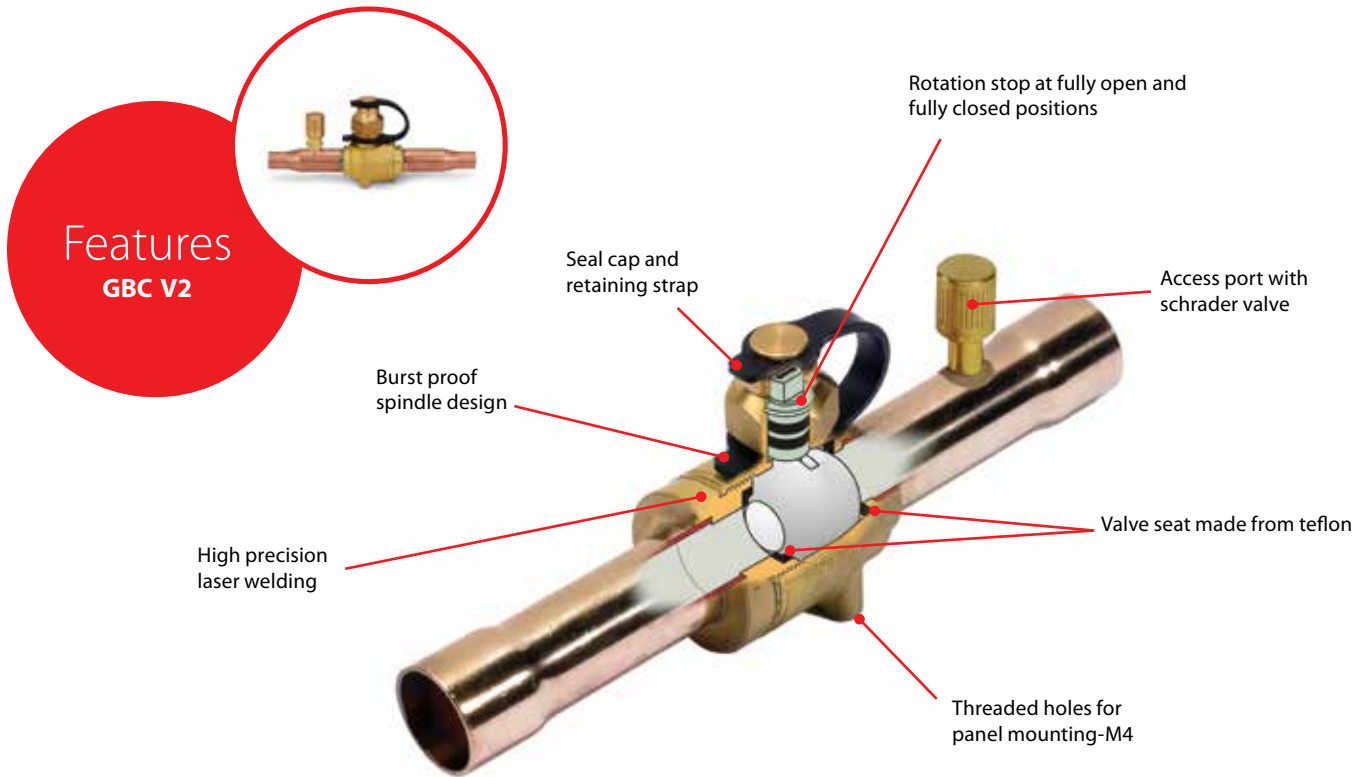

Product Selection

Danfoss Type	Solder ODF connection (in.)	Flow Coefficient, C _v value ¹ (gal/min)	Working pressure (psig)	Danfoss Code No. ¹
GBC 6s	¼	2.12	650	009L8050
GBC 10s	⅜	9.29		009L8051
GBC 12s	½	15.22		009L8052
GBC 16s	⅝	18.10		009L8053
GBC 18s	¾	25.35		009L8054
GBC 22s	7⁄8	38.54		009L8065
GBC 28s	1 ⅛	71.96		009L8066
GBC 35s	1 ⅜	107.23		009L8067
GBC 42s	1 ½	155.78		009L8068
GBC 54s	2 ⅛	277.57		009L8059
GBC 67s	2 ⅝	424.69		009L8069

¹ All valves listed in table above are Full Port.

Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Ball valve service kit	GBC 6, 10, 12, 16, 18, 22	009G7012
Ball valve service kit	GBC 28, 35	009G7014
Ball valve service kit	GBC 42, 54, 67	009G7016

Codes listed above are for GBC V1; for GBC V2 spare parts and accessories, contact Danfoss.

Seal Cap Kit


Type	Valve connection size in.	Industrial pack (no. of pcs)	Code no. for 009GXXXX series	Code no. for 009LXXXX 650 psig series
GBC 6s – GBC 12s	¼–½	6	009G7210	009L7209
GBC 16s – GBC 22s	⅝–7⁄8	6		009L7210
GBC 28s – GBC 35s	1 ⅛–1 ⅜	4	009G7211	—
		3	—	009L7211
GBC 42s – GBC 79s	1 ⅝–3 ⅛	4	009G7212	—
		3	—	009L7212

Bracket Kit

Type	Valve connection size in.	Industrial pack (no. of pcs)	Code no. for 009GXXXX series	Code no. for 009LXXXX 650 psig series
GBC 6s – GBC 12s	¼–½	12	009G7084	009G7089
GBC 16s	⅝	12		009G7084
GBC 18s – GBC 22s	¾–7⁄8	12	009G7085	
GBC 28s	1 ⅛	10	009G7086	
GBC 35s	1 ⅜	5	009G7087	
GBC 42s	1 ½	4	009G7088	

NRV V2 - Check Valves

NRV V2 one-piece check valves are used in liquid suction and hot gas lines in refrigeration and air conditioning applications. NRV valves ensure the correct flow direction and prevent back-condensation from a warm part of the system to the cold evaporator. The hermetic design of solder version meets environmental demands for today and the future. The built-in damping piston makes the valves suitable for installation in lines where pulsation can occur, e.g., in a compressor discharge line.

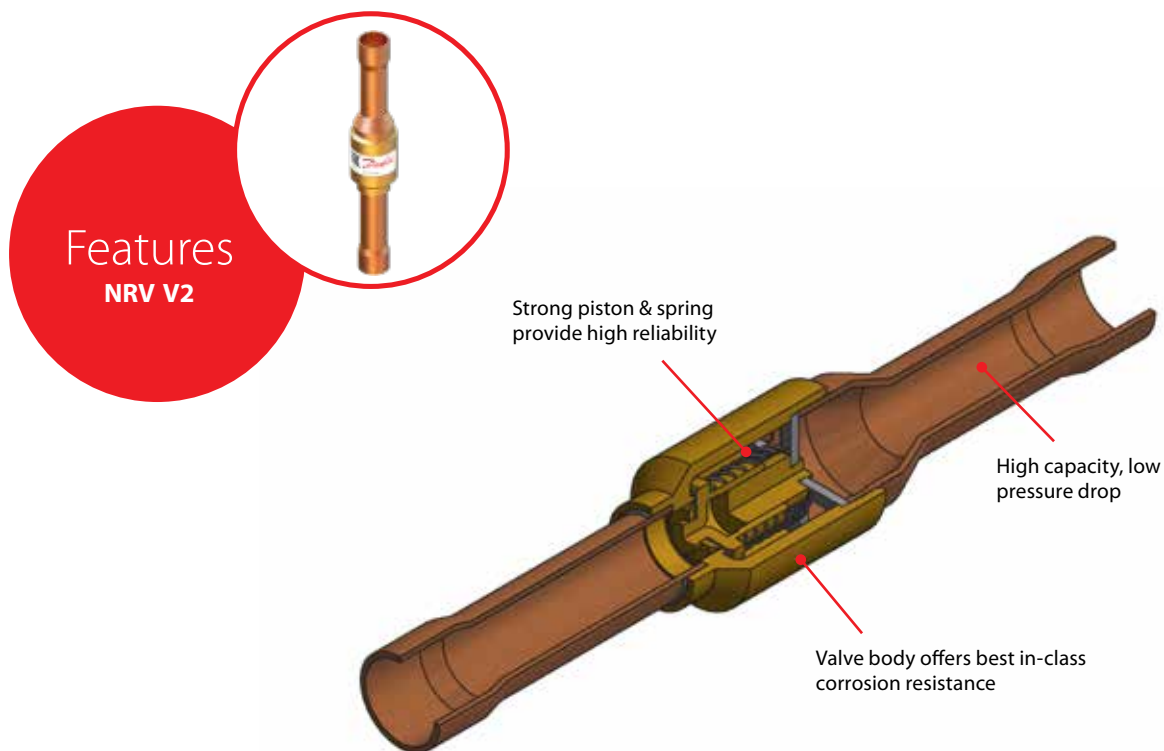

Product Selection


Valve Type	Connection Type	Connection	Min. OPD Δp ¹	C_v value ²	Danfoss Code No.
		in.	psi	gal./min.	
NRV 6s V2	Straightway, solder	¼	0.58	0.77	020B1010
NRV 10s V2	Straightway, solder	¾	0.58	1.90	020B1011
NRV 12s V2	Straightway, solder	½	0.29	2.89	020B1012
NRV 16s V2	Straightway, solder	⅝	0.29	4.62	020B1018

¹ Δp = Minimum Opening Pressure Differential

² The C_v value is the flow of water in gal./min. at a pressure drop across valve of 14.5 psi; $\rho = 62.4 \text{ lbs./ft}^3 = 8.34 \text{ lbs./gal.}$

SGP - Sight Glasses

Danfoss sight glasses with hard crystal view ports are designed to accurately indicate the presence of moisture in refrigeration and air-conditioning systems. When system moisture content rises above permissible levels, the “dry/green” indicator will change to yellow indicating a “wet” system. The indication of dangerous moisture levels is essential in helping prevent the formation of harmful acids which are detrimental to the system. The SGP sight glass is simply the best-made sight glass available today.

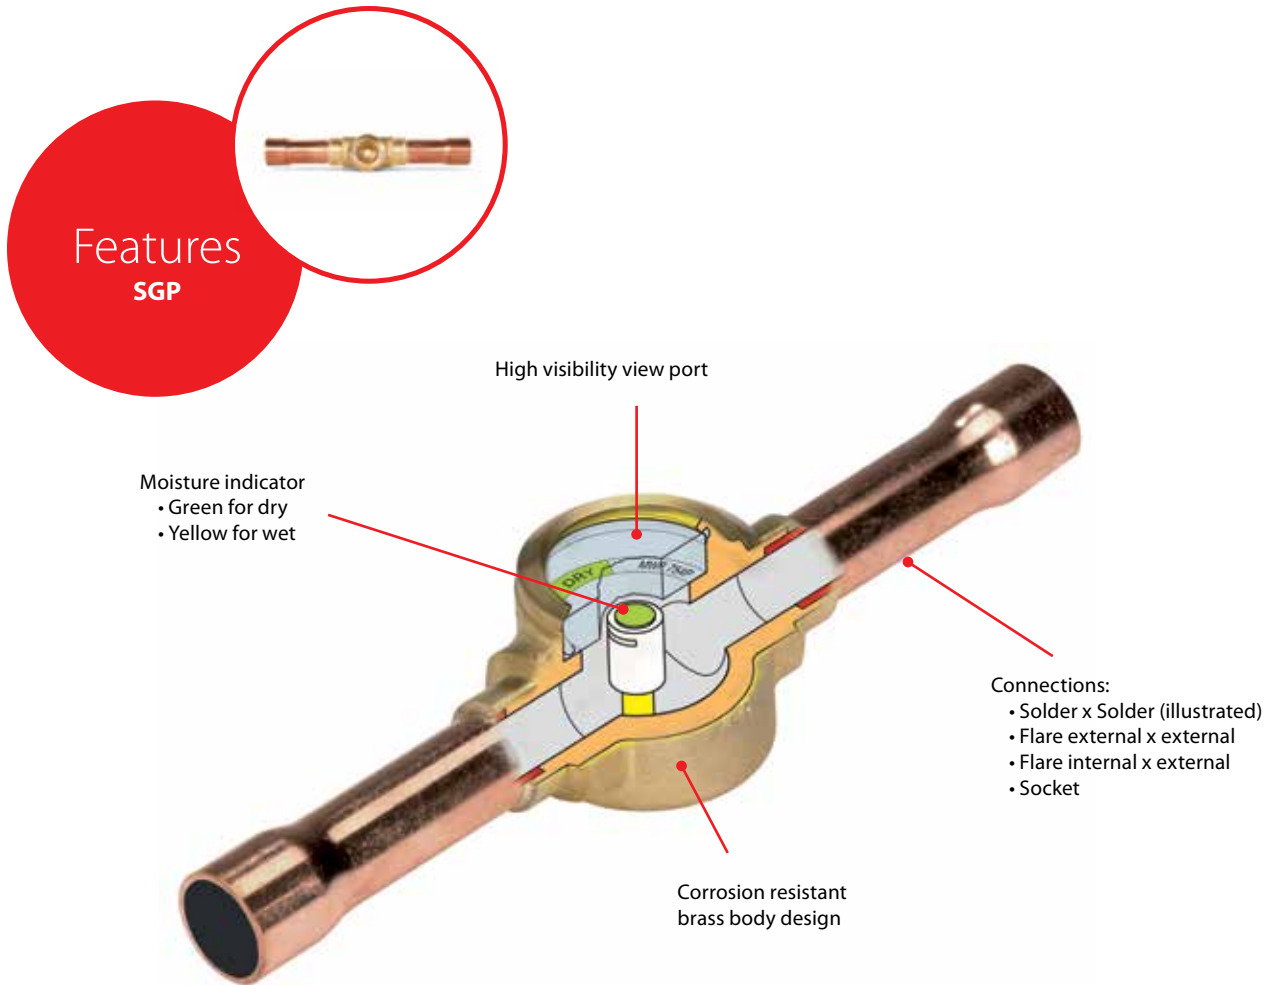

Product Selection

Danfoss Type	Version	Connection (in.)	Ambient temperature (°F)	Maximum working pressure (psig)	Danfoss Code No.
SGP 6 N	Flare int. x ext. ¹	¼ x ¼	-60 to 175	750	014L0171
SGP 10 N		⅜ x ⅜			014L0172
SGP 12 N		½ x ½			014L0173
SGP 6s N	ODF x ODF solder	¼ x ¼			014L0181
SGP 10s N		⅜ x ⅜			014L0182
SGP 12s N		½ x ½			014L0183
SGP 16s N		⅝ x ⅝			014L0145
SGP 22s N		⅞ x ⅞			014L0186
SGP ½ RN	NPT	½			014L0006

¹ Can be screwed directly onto Danfoss filter drier.

Light Commercial Compressors

Specially optimized for use in mobile, household, and light commercial applications, these hermetic reciprocating compressors provide high cooling capacity in an energy-saving design. Compressors are available for R-134a and R-404A.

Features Light Commercial Compressors



Technical data and ordering

Light Commercial Compressors

Low temperature



Refrigerant											
Voltage/Phase/ Frequency	Horsepower rating (HP) ¹	HS/LS torque	Application	Competitor model nos.	OLD Danfoss Model No.	NEW Danfoss Model No.	Cooling capacity (Btu/h) ²			NEW Danfoss Single Packed Code No. ³	
							LBP evaporator temperature (°F)				
							–31	–13	5		
R-134a	115/1/60	¼	HS	Freezer	FF8.5HBK FF10HBX FF112HBX AEA2410YXA	NF7FX SC12G	GL99ADa	429	861	1,474	123B1161
	115/1/60	½+	HS	Freezer	AEA2413YXA	SC15FTX SC15G SC18G	GPY14RDa	698	1,353	2,369	123B1311
	220–240/1/60	½+	HS	Freezer	AKA4476YXD	SC18G SC21G	GPY14NGa	726	1,387	2,415	123B1313
	115/1/60	½	HS	Freezer	AEA2410YXA AKA4460YKA	SC15G	GP14FE	500	1,122	2,003	123B1163
	115/1/60	¾	HS	Freezer	FF110HBX TPA1380YXA	NF11FX	GLY12NRa	698	1,353	2,369	123B1304
R-404A	115/1/60	⅙	HS	Freezer	AEA2380ZXA AEA2411ZXA	TFS4.5CLX	ML60FR	459	883	1,435	123B2143
	115/1/60	⅙	HS	Freezer	AEA9415ZXA	TF4CLX	ML45FR	391	723	1,197	123B2160
	115/1/60	⅓	HS	Freezer	NEK2121GK NEK2125GK	NF5.5CLX	MLY60LDa	665	1,194	1,903	123B2144
	115/1/60	⅓+	HS	Freezer	NEK6181GK AEA2411ZXA AJA2419ZXA	NF7CLX SC10CL	ML80FR	751	1,364	2,219	123B2146
	115/1/60	½	HS	Freezer	NEK2150GK NT2168GKV NJ2192GK NJ2192GJ AJA2425ZXA	SC12CLX.2	MPT12LD	1,379	2,371	3,760	123B2152
	115/1/60	¾	HS	Freezer	NT2168GKV AJB2433ZXA	SC15CLX.2	MPT14LD	1,570	2,716	4,356	123B2155
	208–230/1/60	¾	HS	Freezer		—	MS26FF	1,862	4,186	7,123	123B2201
	200–230/1/ 50–60	¾	HS	Freezer	NT2180GKV AJB2433ZXD	SC18CLX.2	MX21FGa	1,732	3,387	5,658	123B2186
	208–230/1/60	1	HS	Freezer		—	MS34FF	2,396	5,603	10,028	123B2211

¹ Horsepower ratings are nominal. Danfoss recommends sizing compressors based on cooling capacity requirements.

² Capacity at ASHRAE conditions below. For other conditions and/or speeds, check Coolselector or contact Danfoss.


³ Code no. contains compressor and required electrical and non-electrical accessories. For standard code no., change "B" to "F."

Full range of models (refrigerant, capacity, and voltage codes) available. Check Coolselector or contact Danfoss.

Technical data and ordering

Light Commercial Compressors

Medium temperature



Medium temperature											
Voltage/Phase/ Frequency	Horsepower rating (HP) ¹	HS/LS torque	Application	Competitor model nos.	OLD Danfoss Model No.	NEW Danfoss Model No.	Cooling capacity (Btu/h) ²			NEW Danfoss Single Packed Code No. ³	
							MBP evaporator temperature (°F)				
							5	23	45		
R-134a	115/1/60	¼	HS	Cooler	FF8.5HBK FF10HBX AEA4430YXA AEA3430YXA	NF7FX	GLY80RDa	1,123	1,881	3,174	123B1572
	115/1/60	⅓	HS	Cooler	FF7.5HBK AEA1360YXA	NF5.5FX	GL80TE	932	1,580	2,647	123B1575
	115/1/60	¾	HS	Cooler	NEK6210Z FF112HBX AEA4448YXA	SC12G	GPY12RDa	1,799	2,889	4,682	123B1580
	115/1/60	⅓	HS	Cooler	FF110HBX NEK6187Z AEA3440YXA AEA4440YXA	NF11FX	GLY12RRa	1,105	2,500	4,143	123B1601
	115/1/60	½	HS	Cooler	NEK6212Z AKA4460YXA	SC15G	GPY14RDa	1,932	3,302	5,821	123B1584
	115/1/60	½	HS	Cooler	AKA4476YXA	SC18G	GPY16RDa	2,301	3,765	6,190	123B1588
	220–240/1/ 50/60	½	HS	Cooler	NEK6212Z NEK6214Z NT6215Z AKA4406YXD AKA4476YXD	SC15GH	GP16TG	2,436	3,777	6,190	123B1714
	208–230/1/60	¾	HS	Cooler		—	GX23TG	2,970	4,965	8,253	123B1548
	208–230/1/60	¾	HS	Cooler		—	GS26TG	3,091	5,736	9,920	123B1622
	208–230/1/60	¾	HS	Cooler		—	GS30TG	3,451	6,575	11,825	123B1625
208–230/1/60	1	HS	Cooler		—	GS34TF	4,678	8,156	13,571	123B1627	
R-404A	115/1/60	¼	HS	Cooler	AEA9422ZXA AKA9427ZXA	NF5.5CLX	MLY60RDa	1,620	2,487	3,869	123B2527
	115/1/60	¾	HS	Cooler	NEK6181GK NEK6210GK AKA9438ZXA	NF7CLX SC10CL	MLY80RDa	2,144	3,340	5,277	123B2530
	115/1/60	½	HS	Cooler	NEK6213GK AE4470Z-AA AKA9438ZXA	SC12MLX	MLT12RR	2,918	4,384	6,690	123B2542
	115/1/60	½	HS	Cooler	NT6220GKV AKA9455ZXA	SC15MLX.2	MPT14RD	3,754	5,632	8,698	123B2544
	230/1/60	½	HS	Cooler		SC15MLX.2	MPT14RF	3,686	5,502	8,571	123B2543
	208–230/1/60	¾	HS	Cooler		—	MX18TGa	4,322	6,810	10,817	123B2541
	115/1/60	¾	HS	Cooler	NT6222GKV AKA9462ZXA	SC18MLX	MX18TE	4,322	6,810	10,817	123B2545
	208–230/1/60	1	HS	Cooler		—	MX21TGa	4,801	7,546	12,003	123B2714

¹ Horsepower ratings are nominal. Danfoss recommends sizing compressors based on cooling capacity requirements.

² Capacity at ASHRAE conditions below. For other conditions and/or speeds, check Coolselector or contact Danfoss.

³ Code no. contains compressor and required electrical and non-electrical accessories. For standard code no., change "B" to "F."

Full range of models (refrigerant, capacity, and voltage codes) available. Check Coolselector or contact Danfoss.

Full range of models (refrigerant, capacity and voltage codes) available.

Check Coolselector or contact Danfoss.


Test conditions	ASHRAE (LBP)	ASHRAE (MBP)
Condensing temperature	131 °F	131 °F
Evaporator temperature	–10 °F	45 °F
Ambient and suction gas temperature	90 °F	95 °F
Liquid temperature	90 °F	115 °F



Scan the QR Code for a video of a light commercial replacement or visit <http://bit.ly/LightInstall>

Optyma™ - Condensing Units

Danfoss Optyma™ line of light commercial condensing units is available with sizes ranging from 1/8 hp to 13 1/2 hp for low and medium temperature applications for R-404A and R-134a. Its contractor-friendly design makes Optyma easy to install, quiet, and efficient.

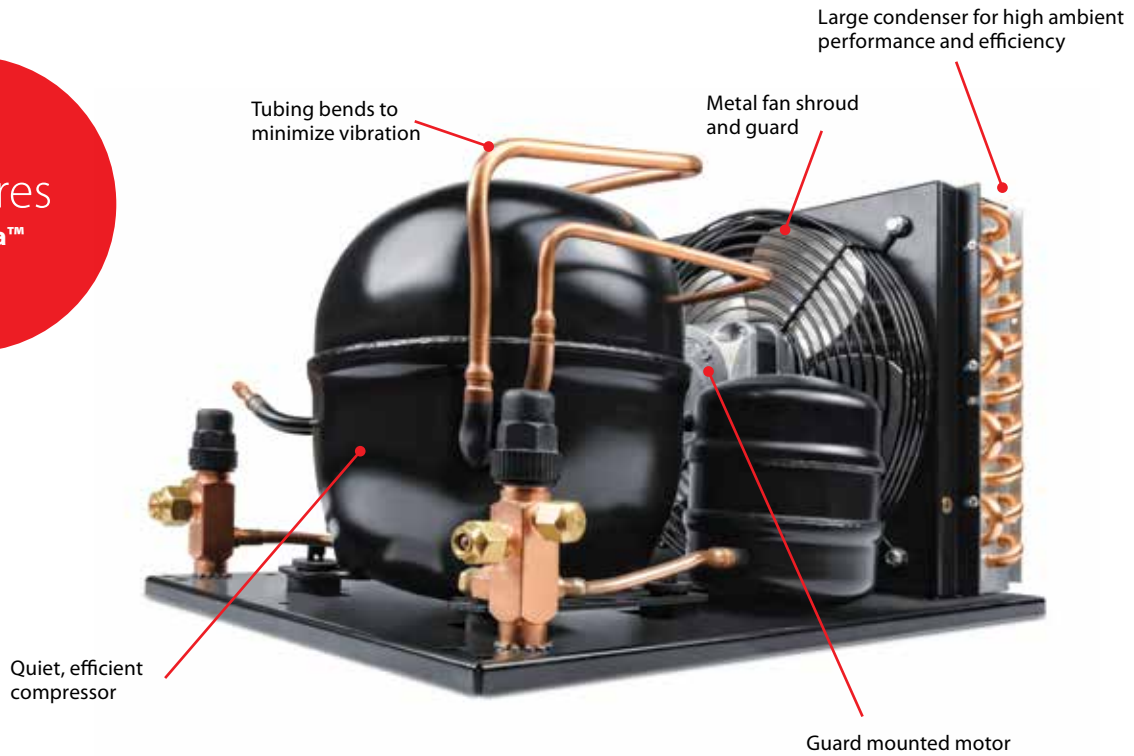


Nomenclature / Model No.

	Application	Design	Refrigerant	Condenser size	HP rating	Certification	Version	Electrical code
OP-	H	N	X	M	0300	U	WG000	Q
Application: L: low H: medium / high U: universal low / medium / high Design: C: air cooled condenser, single fan, recip J: air cooled condenser, slim design, recip G: air cooled condenser, twin fan, recip N: air cooled condenser, slim design, scroll R: air cooled condenser, twin fan, scroll Refrigerant: G: R-134a H: R-404A/R-507A/R-452A M: R-22 replacement Z: R-404A/R-507A/R-134a*/R-448A/R-449A/R-452A X: R-448A/R-449A/R-404A/R-507A/R-134a/R-452A Y: R-448A/R-449A/R-404A/R-507A/R-452A Condenser type and rating: C: fin and tube condenser size 110 °F ambient M: microchannel condenser size 115 °F ambient HP rating: HP rating in hundredths of HP, i.e.: 0033 = 1/8 HP, 0100 = 1 HP Certification: R: UL recognized U: UL listed Electrical code: B: compressor & fan(s), 115V, 1ph, 60 Hz N: compressor & fan(s), 230V, 1ph, 60 Hz Q: compressor 208-230V, 3ph, 60 Hz fan(s) 230V, 1ph, 60 Hz R: compressor 460V, 3ph, 60 Hz fan(s) 460V, 1ph, 60 Hz Version: WA: power cord WB: power cord, receiver WC: electrical box, receiver WD: electrical box, receiver, low pressure control WE: electrical box, receiver, dual pressure control, fan cycling control, larger than 3 HP dual fan units use KPU fan cycling control WF: WE and filter drier, sight glass, solenoid valve with coil WG: electrical box, receiver, dual pressure control, fan speed controller, defrost timer, outdoor enclosure (MBP) WH: electrical box, receiver, dual pressure control, fan speed controller, defrost timer, outdoor enclosure, suction accumulator (LBP) WJ: electrical box, receiver, dual pressure control, fan cycling control, filter drier, sight glass								



Scan the QR Code for a video of an Optyma condensing unit replacement or visit <http://bit.ly/CUinstall>



Technical data and ordering

Optyma™ - Condensing Units (1/5)

R-134a			Ambient temperature (°F)	Capacity range in btu/h ASHRAE ¹ at evaporating temperature (°F)											AWEF rating
Competitor Model Nos.	Danfoss Model No.	Danfoss Code No.		0	5	10	15	20	25	30	35	40	45	50	
AEA3425 M2FH0020 M2FH0024	UCGC0020RWA000B	114N2017	90	1050	1200	1350	1500	1700	1850	2050	2250	2450	2700		N/A
			95	1000	1150	1300	1450	1600	1800	2000	2200	2400	2600		
			100	950	1100	1250	1400	1550	1750	1900	2100	2300	2500		
			110	900	1000	1150	1300	1450	1600	1800	1950	2150	2350		
AEA4430 M2FH0026	UCGC0025RWB000B	114N2019	90	1250	1400	1600	1750	1950	2150	2400	2600	2850	3100		N/A
			95	1200	1350	1550	1700	1900	2100	2300	2500	2750	3000		
			100	1150	1300	1450	1650	1800	2000	2200	2450	2650	2900		
			110	1050	1200	1350	1550	1700	1900	2050	2250	2450	2700		
AEA4440 AEA4448 M2FHA033	UCGC0033UWC000B	114N2022	90		2050	2300	2550	2850	3100	3450	3750	4100	4450		N/A
			95		1950	2200	2450	2750	3000	3300	3650	3950	4300		
			100		1900	2100	2350	2600	2900	3200	3500	3800	4150		
			110		1750	1950	2200	2450	2700	2950	3250	3550	3850		
AKA4460 AKA7437 M2FH0049	UCGC0050RWB000B	114N2023	90	2350	2700	3050	3450	3800	4250	4700	5150	5650	6150		N/A
			95	2300	2600	2950	3300	3700	4100	4500	4950	5400	5900		
			100	2200	2500	2800	3200	3550	3950	4350	4750	5200	5650		
			110	2000	2300	2600	2900	3250	3600	4000	4400	4800	5200		
	HCGC0055RWB000B	114N2025	90		2900	3300	3800	4300	4850	5450	6100	6700	7350		N/A
			95		2800	3200	3650	4150	4650	5250	5850	6450	7050		
			100		2650	3050	3500	3950	4500	5050	5600	6150	6750		
			110				3250	3700	4150	4700					
AJA4492 AJA7465 FTAHA074 FTAHA075 FTAHB074 FTAMA074 FTAMA075	HCGC0075UWC000B HCGC0075UWC000N	114N2027 114N2028	90		4350	4850	5550	6250	7150	8050	9100	10100	11200		N/A
			95		4100	4700	5350	6100	6950	7850	8800	9800	10850		
			100		3900	4500	5150	5900	6750	7600	8550	9500	10450		
			110				4850	5600	6400	7250	8100				
AJA4512 FTAHA100 FTAHA101	HCGC0100UWD000N	114N2029	90		6800	7450	8200	9050	9950	10950	12000	13050	14200		N/A
			95		6300	7000	7750	8550	9450	10400	11450	12450	13550		
			100			6550	7300	8100	8950	9900	10900	11850	12900		
			110				6500	7250	8100	9000					
	HCZC0150UWJ300N HCZC0150UWJ300Q HCZC0150UWJ300R	114N3601 114N3602 114N3603	90				5500	6305	7192	8163	9216	10350	11560	12840	6.62 6.77 6.77
			95				5194	5975	6835	7775	8794	9889	11060	12290	
			100				4889	5645	6477	7386	8369	9426	10550	11740	
			105				4585	5315	6118	6994	7942	8960	10040	11190	
			110				4282	4985	5758	6601	7513	8491	9532	10630	
	HCZC0200UWJ300N HCZC0200UWJ300Q HCZC0200UWJ300R	114N3604 114N3605 114N3606	90				7245	8343	9529	10800	12160	13590	15090	16660	7.15 7.32 7.32
			95				6921	7981	9123	10350	11650	13020	14460	15960	
			100				6592	7611	8708	9881	11130	12440	13820	15250	
			105				6255	7232	8283	9404	10590	11850	13160	14530	
			110				5912	6845	7847	8916	10050	11240	12490	13790	

¹ Ambient temperature = 90 °F, Return gas = 65 °F, Subcooling = 5 °F

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ - Condensing Units (1/5) (continued)

R-134a			Ambient temperature (°F)	Capacity range in btu/h ASHRAE ¹ at evaporating temperature (°F)											AWEF rating
Competitor Model Nos.	Danfoss Model No.	Danfoss Code No.		0	5	10	15	20	25	30	35	40	45	50	
			90				9583	10990	12480	14040	15680	17380	19140	20960	
	HCZC0250UWJ300N	114N3607	95				9147	10520	11960	13470	15060	16700	18400	20140	7.34
	HCZC0250UWJ300Q	114N3608	100				8704	10030	11430	12900	14420	16000	17640	19310	7.52
	HCZC0250UWJ300R	114N3609	105				8257	9544	10900	12310	13780	15300	16860	18470	7.52
			110				7804	9049	10350	11710	13130	14580	16080	17610	
	HCZC0275UWJ300N	114N3610	90				12470	14150	15930	17820	19800	21880	24030	26270	
	HCZC0275UWJ300Q	114N3611	95				11890	13520	15260	17090	19010	21010	23090	25240	7.58
	HCZC0275UWJ300R	114N3612	100				11320	12900	14580	16350	18210	20140	22140	24210	7.77
			105				10740	12280	13910	15620	17400	19260	21190	23170	7.77
			110				10170	11660	13230	14880	16590	18380	20220	22110	
			90				14490	16220	18070	20050	22140	24350	26680	29110	
	HCZC0300UWJ300N	114N3614	95				13690	15400	17230	19170	21230	23410	25690	28080	8.15
	HCZC0300UWJ300Q	114N3615	100				12910	14600	16410	18320	20350	22940	24730	27070	7.78
	HCZC0300UWJ300R	114N3616	105				12160	13830	15610	17500	19500	21600	23800	26090	7.99
			110				11440	13090	14850	16710	18670	20740	22890	25130	
	HGZC0400UWJ300N	114N3617	90				16350	19020	21910	25000	28280	31760	35410	39220	
	HGZC0400UWJ300Q	114N3618	95				15700	18300	21100	24090	27260	30610	34130	37800	
	HGZC0400UWJ300R	114N3619	100				15010	17540	20240	23130	26200	29430	32810	36340	7.13
			105				14290	16730	19350	22140	25090	28200	31460	34840	
			110				13530	15900	18430	21120	23960	26940	30060	33310	
			90				20950	24290	27860	31650	35630	39800	44130	48600	
	HGZC0500UWJ300N	114N3621	95				20080	23320	26780	30440	34290	38310	42470	46770	7.69
	HGZC0500UWJ300Q	114N3622	100				19170	22320	25660	29200	32910	36780	40780	44910	7.69
	HGZC0500UWJ300R	114N3623	105				18220	21270	24510	27930	31500	35220	39070	43020	7.56
			110				17240	20200	23330	26620	30060	33630	37320	41110	
	HGZC0700UWJ300Q	114N3626	90				27750	31880	36300	41010	46000	51260	56750	62480	
	HGZC0700UWJ300R	114N3627	95				26630	30630	34920	39480	44300	49370	54680	60200	
			100				25500	29380	33530	37930	42590	47480	52590	57900	8.07
			105				24350	28110	32120	36370	40860	45570	50490	55590	7.97
			110				23200	26830	30700	34800	39120	43650	48370	53270	
			90				32220	37130	42390	48000	53940	60200	66750	73590	
	HGZC0900UWJ300Q	114N3628	95				30500	35270	40360	45790	51530	57560	63880	70460	
	HGZC0900UWJ300R	114N3629	100				28780	33400	38330	43560	49090	54900	60980	67300	7.33
			105				27070	31530	36280	41320	46640	52220	58060	64120	
			110				25360	29660	34230	39070	44180	49530	55110	60910	
	HGZC1000UWJ300Q	114N3631	90				40340	46370	52830	59690	66930	74540	82480	90720	
	HGZC1000UWJ300R	114N3632	95				38310	44150	50390	57010	63980	71300	78920	86820	
			100				36290	41930	47940	54300	61000	68020	75320	82880	7.9
			105				34280	39710	45480	51580	58000	64700	71680	78890	
			110				32270	37480	43000	48840	54960	61350	68000	74860	
			90				52460	59230	66410	73990	81940	90260	98920	107900	
	HGZC1200UWJ300Q	114N3633	95				50300	56870	63830	71160	78840	86860	95190	103800	
	HGZC1200UWJ300R	114N3634	100				48100	54470	61200	68270	75670	83390	91400	99680	7.77
			105				45860	52020	58510	65320	72440	79850	87530	95470	
			110				43590	49530	55780	62320	69150	76250	83590	91170	
	HGZC1350UWJ300Q	114N3636	90				58110	65480	73290	81500	90100	99080	108400	118000	
	HGZC1350UWJ300R	114N3637	95				55650	62820	70390	78350	86670	95340	104300	113600	
			100				53150	60110	67450	75140	83180	91540	100200	109100	7.8
			105				50600	57350	64440	71880	79630	87670	96000	104600	
			110				48010	54540	61390	68550	76010	83750	91730	99950	

¹ Ambient temperature = 90 °F, Return gas = 65 °F, Subcooling = 5 °F

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ - Condensing Units (2/5)

R-404A LBP/ R-507 MBP			Ambient temperature (°F)	Capacity range in btu/h ASHRAE ¹ at evaporating temperature (°F)											AWEF rating
Competitor Model Nos.	Danfoss Model No.	Danfoss Code No.		0	5	10	15	20	25	30	35	40	45	50	
AEA9415 M4FH0022	UCHC0020RWA000B	114N2316	90	1000	1100	1250	1400	1500	1650	1800	2000	2150	2300		N/A
			95	950	1050	1200	1300	1450	1600	1750	1900	2050	2200		
			100	900	1000	1100	1250	1350	1500	1650	1800				
			110	800	900	1000	1150	1250	1400	1500					
AEA9422 M4FH0025	UCHC0025RWB000B	114N2318	90	1650	1850	2050	2250	2450	2650	2900	3150	3400	3650		N/A
			95	1600	1750	1950	2150	2350	2550	2800	3000	3250	3500		
			100	1500	1650	1850	2050	2250	2450	2650	2900	3100	3350		
			110	1350	1550	1700	1850	2050	2250						
AKA9429 M4FHA036	UCHC0033RWC000B	114N2321	90	2050	2250	2500	2750	3000	3250	3550	3850	4100	4450		N/A
			95	1950	2150	2400	2600	2850	3100	3400	3650	3950	4250		
			100	1850	2050	2250	2500	2700	2950	3200	3500	3750	4050		
			110	1650	1850	2050									
AKA9440 M4FH0050	UCHC0050UWC000B UCHC0050UWC000N	114N2324 114N2325	90	2450	2750	3100	3400	3750	4100	4500	4900	5250	5700		N/A
			95	2300	2600	2900	3200	3550	3850	4250	4600	4950	5350		
			100	2100	2400	2700	3000	3300	3600	3950	4300	4650	5000		
			110	1850	2100	2350	2600	2850	3150						
	HCHC0060UWC000B	114N2328	90	3400	3750	4200	4600	5050	5550	6050	6600	7100	7700		N/A
			95	3200	3550	3950	4350	4800	5250	5750	6250	6750	7300		
			100	3000	3350	3700	4100	4500	4950	5400	5900	6400	6900		
			110	2650	2950	3300	3700	4050	4450	4900					
	HCHC0075UWC000B HCHC0075UWC000N	114N2330 114N2331	90	4400	4950	5500	6150	6800	7500	8250	9000	9800	10650		N/A
			95	4150	4700	5250	5850	6500	7200	7900	8650	9400	10250		
			100	3900	4450	5000	5600	6200	6850	7550	8300	9050	9850		
			110	3500	4000	4550	5100	5700	6350	7000					
AJA7480 FJAMA100 FJAMA101 FJAMA106 FJAF100	HCHC0100UWD000N	114N2332	90		5900	6650	7450	8200	9000	9850	10650	11450	12300		N/A
			95		5600	6350	7100	7800	8600	9350	10150	10950	11750		
			100			6000	6700	7400	8150	8900	9650	10400	11150		
			110				6100	6750	7400	8100	8800				
AWA7512 FJAMA125 FJAMA126 FJAMA150	HCZC0150UWJ300N HCZC0150UWJ300Q HCZC0150UWJ300R	114N3601 114N3602 114N3603	90				9989	11300	12670	14100	15590	17120	18700	20310	7.07
			95				9438	10690	12000	13370	14780	16240	17750	19280	
			100				8879	10080	11320	12620	13970	15360	16790	18250	
			105				8313	9451	10640	11870	13150	14470	15820	17200	
			110				7742	8822	9949	11120	12330	13580			
AWA7515 VJAF017H FJAMA200	HCZC0200UWJ300N HCZC0200UWJ300Q HCZC0200UWJ300R	114N3604 114N3605 114N3606	90				13320	14880	16510	18210	19960	21750	23590	25460	7.93
			95				12660	14140	15690	17290	18950	20650	22380	24150	
			100				11970	13380	14840	16360	17920	19520	21160	22820	
			105				11260	12590	13970	15400	16870	18380	19910	21470	
			110				10530	11780	13080	14420	15800	17210			
VJAF025H	HCZC0250UWJ300N HCZC0250UWJ300Q HCZC0250UWJ300R	114N3607 114N3608 114N3609	90				16910	18680	20500	22380	24310	26270	28260	30270	7.66
			95				16110	17790	19520	21310	23130	24980	26870	28760	
			100				15290	16880	18530	20210	21930	23680	25450	27240	
			105				14450	15960	17510	19100	20720	22370	24030	25700	
			110				13600	15020	16480	17970	19490	21040			

¹ Ambient temperature = 90 °F, Return gas = 65 °F, Subcooling = 5 °F

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ - Condensing Units (2/5) (continued)

R-404A LBP/ R-507 MBP			Ambient temperature (°F)	Capacity range in btu/h ASHRAE¹											AWEF rating
Competitor Model Nos.	Danfoss Model No.	Danfoss Code No.		0	5	10	15	20	25	30	35	40	45	50	
			90				20820	23050	25350	27690	30080	32500	34930	37360	
	HCZC0275UWJ300N	114N3610	95				19740	21860	24050	26280	28540	30830	33130	35420	
	HCZC0275UWJ300Q	114N3611	100				18660	20680	22750	24860	27000	29160	31330	33490	7.66
	HCZC0275UWJ300R	114N3612	105				17580	19490	21450	23440	25460	27500	29540	31560	
			110				16500	18310	20150	22030	23930	25850			
	HCZC0300UWJ300N	114N3614	90				23390	25810	28300	30830	33380	35950	38520	41060	
	HCZC0300UWJ300Q	114N3615	95				22180	24490	26850	29240	31660	34090	36510	38910	8.23
	HCZC0300UWJ300R	114N3616	100				20980	23170	25400	27660	29940	32230	34510	36770	8.23
			105				19780	21850	23950	26080	28230	30390	32530	34640	8.18
			110				18590	20530	22510	24520	26540	28550			
	HGZC0400UWJ300N	114N3617	90				31480	35020	38720	42580	46590	50730	54980	59340	
	HGZC0400UWJ300Q	114N3618	95				29880	33270	36820	40510	44330	48280	52330	56480	
	HGZC0400UWJ300R	114N3619	100				28260	31490	34880	38390	42040	45790	49650	53580	8.68
			105				26600	29690	32910	36260	39720	43280	46940	50670	
			110				24930	27860	30920	34100	37380	40760			
AVA7523 FJAMA300 VJAF030H FJAMA325	HGZC0500UWJ300N	114N3621	90				38340	42410	46630	50980	55440	59980	64600	69260	
	HGZC0500UWJ300Q	114N3622	95				36310	40200	44210	48350	52580	56900	61280	65700	8.23
	HGZC0500UWJ300R	114N3623	100				34270	37970	41780	45700	49720	53810	51960	62130	8.23
			105				32220	35720	39340	43050	46850	50710	54630	58570	8.16
			110				30170	33480	36890	40390	43980	47620			
			90				49600	54670	59940	65380	70990	76730	82580	88530	
VJAF035Z	HGZC0700UWJ300Q	114N3626	95				47120	51940	56950	62120	67440	72890	78440	84070	
VJA035H	HGZC0700UWJ300R	114N3627	100				44610	49190	53940	58840	63880	69030	74280	79600	8.03
			105				42090	46420	50900	55530	60290	65160	70110	75130	7.97
			110				39550	43630	47860	52220	56700	61280			
FJAMB400 VJAF040Z VJAF040H FJAMB500 VJAF050Z	HGZC0900UWJ300Q	114N3628	90				60260	67010	74070	81430	89080	97000	105200	113500	
	HGZC0900UWJ300R	114N3629	95				57030	63470	70210	77230	84520	92050	99810	107800	8.59
			100				53800	59940	66350	73030	79950	87110	94470	102000	
			105				50570	56400	62490	68820	73580	82160	89130	96270	
			110				47350	52870	58630	64620	70820	77230			
			90				75520	83250	91320	99710	108400	117400	126600	136000	
FJAH100Z	HGZC1000UWJ300Q	114N3631	95				71710	79080	86780	94770	103000	111600	120300	129300	
	HGZC1000UWJ300R	114N3632	100				67860	74880	82210	89800	97660	105700	114000	122500	8.32
			105				63980	70660	77610	84810	92250	99910	107700	115700	
			110				60090	66410	72990	79800	86830	94050			
CJDM1000	HGZC1200UWJ300Q	114N3633	90				87530	96260	105400	114800	124500	134500	144800	155200	
	HGZC1200UWJ300R	114N3634	95				83140	91470	100100	109100	118400	127900	137600	147500	8.04
			100				78710	86630	94860	103400	112200	121200	130400	139800	
			105				74230	81750	89550	97630	106000	114500	123200	132000	
			110				69730	76830	84210	91840	99690	107700			
			90				94170	103400	112900	122900	133100	143600	154300	165200	
FJAH120Z	HGZC1350UWJ300Q	114N3636	95				89460	98240	107400	116800	126500	136500	146700	157000	
FJAM130Z	HGZC1350UWJ300R	114N3637	100				84750	93100	101800	110800	120000	129500	139100	148900	7.9
			105				80020	87960	96190	104700	113400	122400	131500	140700	
							75300	82810	90600	98630	106900	115300			

¹ Ambient temperature = 90 °F, Return gas = 65 °F, Subcooling = 5 °F

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ - Condensing Units (3/5)

R-448A MBP/ R-449A MBP			Ambient temperature (°F)	Capacity range in btu/h ASHRAE ¹ at evaporating temperature (°F)								AWEF rating
Competitor Model Nos.	Danfoss Model No.	Danfoss Code No.		15	20	25	30	35	40	45	50	
	HCZC0150UWJ300N HCZC0150UWJ300Q HCZC0150UWJ300R	114N3601 114N3602 114N3603	90	8586	9756	10990	12280	13620	15020	16460	17960	7.58
			95	8110	9234	10420	11650	12950	14290	15680	17110	
			100	7644	8723	9857	11040	12280	13570	14900	16270	
			105	7188	8222	9308	10440	11630	12860	14130	15450	
	HCZC0200UWJ300N HCZC0200UWJ300Q HCZC0200UWJ300R	114N3604 114N3605 114N3606	110	6744	7732	8770	9857	10990	12160	13380	14630	8.16
			90	11590	12990	14490	16080	17750	19500	21320	23210	
			95	11060	12390	13820	15330	16930	18600	20330	22130	
			100	10530	11800	13160	14590	16110	17700	19350	21060	
			105	10010	11210	12500	13860	15300	16810	18380	20000	
	HCZC0250UWJ300N HCZC0250UWJ300Q HCZC0250UWJ300R	114N3607 114N3608 114N3609	110	9488	10630	11850	13140	14500	15930	17410	18950	6.77 7.15 7.32
			90	14170	15860	17660	19550	21540	23610	25750	27960	
			95	13520	15130	16830	18640	20530	22500	24540	26650	
			100	12880	14400	16020	17730	19530	21400	23350	25350	
			105	12240	13680	15220	16840	18540	20320	22160	24060	
	HCZC0275UWJ300N HCZC0275UWJ300Q HCZC0275UWJ300R	114N3610 114N3611 114N3612	110	11600	12970	14420	15950	17560	19240	20980	22780	6.77 7.15 7.32
			90	18050	20130	22290	24530	26830	29190	31570	33990	
			95	17220	19200	21270	23400	25590	27830	30100	32390	
			100	16390	18270	20240	22270	24350	26470	28630	30800	
			105	15560	17350	19210	21130	23110	25120	27160	29220	
	HCZC0300UWJ300N HCZC0300UWJ300Q HCZC0300UWJ300R	114N3614 114N3615 114N3616	110	14720	16420	18180	20000	21870	23770	25700	27640	7.32 7.34 7.52
			90	20390	22700	25090	27560	30080	32640	35230	37820	
			95	19430	21630	23920	26260	28660	31090	33550	36020	
			100	18470	20570	22740	24970	27240	29550	31880	34210	
			105	17520	19510	21560	23670	25830	28010	30210	32420	
	HGZC0400UWJ300N HGZC0400UWJ300Q HGZC0400UWJ300R	114N3617 114N3618 114N3619	110	16570	18450	20390	22380	24410	26480	28550	30630	8.86
			90	26130	29570	33220	37070	41100	45300	49670	54170	
			95	24900	28200	31690	35380	39240	43270	47450	51770	
			100	23660	26820	30160	33690	37390	41240	45240	49370	
			105	22410	24530	28630	31990	35520	39210	43020	46970	
	HGZC0500UWJ300N HGZC0500UWJ300Q HGZC0500UWJ300R	114N3621 114N3622 114N3623	110	21160	24040	27090	30300	33660	37170	40810	44570	8.49 8.49 8.40
			90	32200	36160	40310	44650	49160	53810	58600	63500	
			95	30610	34410	38400	42570	46890	51360	55960	60660	
			100	29040	32680	36510	40500	44640	48920	53320	57820	
			105	27480	30970	34620	38440	42410	46500	50710	55010	
	HGZC0700UWJ300Q HGZC0700UWJ300R	114N3626 114N3627	110	25940	29270	32760	36400	40180	44090	48110	52210	8.55 8.47
			90	43870	48970	54330	59930	65750	71780	77980	84330	
			95	41900	46800	51930	57300	62880	68650	74590	80670	
			100	39930	44610	49530	54660	60000	65520	71190	77000	
			105	37940	42420	47120	52020	57120	62380	67800	73340	
	HGZC0900UWJ300Q HGZC0900UWJ300R	114N3628 114N3629	110	35950	40220	44700	49380	54230	59250	64410	69690	8.74
			90	52540	59390	66680	74390	82510	91020	99900	109100	
			95	49960	56530	63520	70920	78720	86890	95410	104300	
			100	47410	53700	60400	67490	74960	82790	90960	99450	
			105	44890	50900	57310	64090	71240	78730	86550	94680	
	HGZC1000UWJ300Q HGZC1000UWJ300R	114N3631 114N3632	110	42410	48140	54250	60720	67550	74710	82180	89940	8.73
			90	66450	74950	83960	93470	103400	113900	124700	135900	
			95	63170	71330	79980	89100	98690	108700	119100	129900	
			100	59930	67740	76030	84770	93960	103600	113500	123900	
			105	56720	64190	72110	80480	89270	98470	108000	117900	
	HGZC1200UWJ300Q HGZC1200UWJ300R	114N3633 114N3634	110	53550	60670	68240	76230	84630	93410	102600	112000	8.61
			90	78110	86970	96280	106000	116200	126700	137500	148700	
			95	74470	82980	91920	101300	111000	121100	131600	142300	
			100	70870	79040	87620	96590	105900	115600	125600	135900	
			105	67330	75150	83370	91970	100900	110200	119800	129600	
	HGZC1350UWJ300Q HGZC1350UWJ300R	114N3636 114N3637	110	63850	71320	79180	87400	95950	104800	114000	123400	8.12
			90	83580	92920	102700	112900	123500	134500	145800	157300	
			95	79660	88630	98030	107800	118000	128500	139300	150400	
			100	75790	84400	93410	102800	112600	122600	133000	143600	
			105	71990	80220	88850	97840	107200	116800	126700	136800	
			110	68240	76110	84350	92930	101800	111000	120500	130100	

¹ Ambient temperature = 90 °F, Return gas = 65 °F, Subcooling = 5 °F

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ - Condensing Units (4/5)

R-452A MBP			Ambient temperature (°F)	Capacity range in btu/h ASHRAE ¹ at evaporating temperature (°F)								AWEF rating
Competitor Model Nos.	Danfoss Model No.	Danfoss Code No.		15	20	25	30	35	40	45	50	
	HCZC0150UWJ300N HCZC0150UWJ300Q HCZC0150UWJ300R	114N3601 114N3602 114N3603	90	9663	10850	12100	13400	14760	16170	17630	19120	7.64
			95	9109	10240	11430	12670	13970	15310	16690	18120	
			100	8558	9636	10770	11950	13180	14450	15770	17120	
			105	8010	9034	10110	11230	12400	13600	14850	16130	
			110	7466	8436	9453	10510	11620	12760	13940	15160	
	HCZC0200UWJ300N HCZC0200UWJ300Q HCZC0200UWJ300R	114N3604 114N3605 114N3606	90	12930	14340	15820	17360	18950	20580	22260	23970	8.24
			95	12260	13610	15010	16480	17990	19540	21140	22760	
			100	11590	12880	14210	15600	17040	18510	20030	21570	
			105	10930	12150	13420	14740	16100	17490	18920	20380	
			110	10280	11440	12640	13880	15160	16480	17830	19200	
	HCZC0250UWJ300N HCZC0250UWJ300Q HCZC0250UWJ300R	114N3607 114N3608 114N3609	90	15430	17050	18780	20610	22540	24540	26620	28760	7.60
			95	14650	16180	17810	19540	21350	23240	25210	27230	
			100	13860	15300	16830	18450	20160	21940	23790	25700	
			105	13070	14410	15840	17360	18960	20630	22370	24170	
			110	12260	13510	14850	16260	17760	19330	20960	22640	
	HCZC0275UWJ300N HCZC0275UWJ300Q HCZC0275UWJ300R	114N3610 114N3611 114N3612	90	19170	21110	23130	25230	27390	29600	31850	34130	7.60 7.73 7.73
			95	18200	20030	21940	23920	25960	28040	30160	32310	
			100	17220	18940	20740	22600	24510	26470	28470	30490	
			105	16220	17840	19520	21260	23060	24900	26770	28670	
			110	15210	16720	18290	19920	21600	23320	25070	26850	
	HCZC0300UWJ300N HCZC0300UWJ300Q HCZC0300UWJ300R	114N3614 114N3615 114N3616	90	22110	24310	26590	28930	31320	33740	36180	38630	7.73 7.73 7.73
			95	20990	23060	25200	27390	29640	31910	34200	36490	
			100	19840	21780	23790	25840	27940	30070	32210	34350	
			105	18680	20490	22360	24270	26230	28210	30210	32210	
			110	17490	19180	20910	22690	24510	26350	28210	30080	
	HGZC0400UWJ300N HGZC0400UWJ300Q HGZC0400UWJ300R	114N3617 114N3618 114N3619	90	29010	32460	36070	39840	43760	47800	51950	56200	8.27
			95	27590	30880	34320	37910	41630	45480	49430	53470	
			100	26140	29270	32540	35950	39480	43130	46880	50710	
			105	24670	27630	30730	33960	37310	40760	44310	47940	
			110	23170	25970	28900	31960	35120	38380	41730	45160	
	HGZC0500UWJ300N HGZC0500UWJ300Q HGZC0500UWJ300R	114N3621 114N3622 114N3623	90	35840	39770	43850	48080	52420	56870	61400	65990	8.19 8.19 8.11
			95	34010	37750	41640	45660	49800	54030	58340	62710	
			100	32160	35730	39430	43240	47170	51180	55270	59410	
			105	30320	33690	37200	40820	44530	48330	52200	56120	
			110	28460	31660	34970	38390	41900	45490	49140	52830	
	HGZC0700UWJ300Q HGZC0700UWJ300R	114N3626 114N3627	90	45880	50630	55570	60700	65990	71430	76990	82650	8.01 7.94
			95	43730	48250	52960	57840	62870	68030	73310	78680	
			100	41550	45840	50310	54930	59700	64600	69590	74670	
			105	39330	43390	47620	52000	56500	61130	65850	70640	
			110	37070	40910	44900	49030	53280	57640	62080	66600	
	HGZC0900UWJ300Q HGZC0900UWJ300R	114N3628 114N3629	90	58530	65320	72470	79950	87760	95870	104200	112900	8.80
			95	55620	62090	68900	76030	83460	91170	99140	107300	
			100	52700	58850	65320	72100	79150	86470	94040	101800	
			105	49770	55610	61740	68160	74850	81780	88940	96310	
			110	46820	52360	58160	64230	70550	77100	83870	90820	
	HGZC1000UWJ300Q HGZC1000UWJ300R	114N3631 114N3632	90	72590	80820	89440	98420	107700	117400	127300	137400	8.75
			95	68910	76760	84970	93530	102400	111600	121000	130600	
			100	65210	72680	80490	88630	97060	105800	114700	123800	
			105	61510	68590	76000	83710	91700	99950	108400	117100	
			110	57790	64490	71500	78800	86350	94150	102200	110300	
	HGZC1200UWJ300Q HGZC1200UWJ300R	114N3633 114N3634	90	81990	90110	98610	107500	116600	126100	135800	145800	8.51
			95	77940	85700	93810	102300	111000	120100	129400	138900	
			100	73890	81280	89010	97060	105400	114000	122900	132000	
			105	69850	76870	84210	91860	99800	108000	116400	125000	
			110	65810	72470	79430	86680	94210	102000	110000	118200	
	HGZC1350UWJ300Q HGZC1350UWJ300R	114N3636 114N3637	90	91250	100200	109400	119000	129000	139200	149600	160300	8.19
			95	86730	95220	104100	113200	122400	132400	142400	152500	
			100	82200	90280	98690	107400	116400	125600	135100	144700	
			105	77670	85340	93380	101600	110100	118900	127800	136900	
			110	73140	80400	87960	95790	103900	112100	120600	129200	

¹ Ambient temperature = 90 °F, Return gas = 65 °F, Subcooling = 5 °F

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ - Condensing Units (5/5)

R-404A MBP/ R-507 MBP			Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)											AWEF rating
Competitor Model Nos.	Danfoss Model No.	Danfoss Code No.		-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	
	UCHC0020RWA000B	114N2316	90	350	400	450	550	600	700	800	900	1000	1100	1250	N/A
			95	300	350	450	500	550	650	750	850	950	1050	1200	
			100	300	350	400	450	550	600	700	800	900	1000	1100	
			110	250	300	350	400	500	550	650	700	800	900		
AEA2410	UCHC0025RWB000B	114N2318	90	600	700	800	900	1050	1200	1350	1500	1650	1850	2050	N/A
			95	550	650	750	900	1000	1150	1250	1400	1600	1750	1950	
			100	550	600	700	850	950	1050	1200	1350	1500	1650	1850	
			110	450	550	650	750	850	950	1100	1250	1350	1550	1700	
AEA2413 M4FL0033	UCHC0033RWC000B	114N2321	90	750	850	1000	1100	1300	1450	1650	1800	2050	2250	2500	N/A
			95	700	800	950	1050	1200	1400	1550	1750	1950	2150	2400	
			100	650	750	850	1000	1150	1300	1450	1650	1850	2050	2250	
			110	550	650	750	900	1000	1150	1350	1500				
AKA2422 M4FL0040	UCHC0050UWC000B UCHC0050UWC000N	114N2324 114N2325	90			1100	1300	1500	1700	1900	2150	2400	2700	2950	N/A
			95			1000	1200	1400	1600	1850	2050	2300	2550	2850	
			100			900	1100	1300	1500	1750	1950	2200	2450	2700	
			110			750	950	1150	1350	1550	1750	2000	2250	2500	
	LCHC0050RWB000B	114N2389	90	1050	1250	1450	1700	1950	2200	2500	2800	3150	3450	3850	
			95	950	1150	1350	1600	1850	2100	2400	2650	3000	3300	3650	
			100	850	1050	1250	1500	1700	2000	2250	2500	2800	3150	3450	
			110	700	900	1100	1300	1500	1750	2000	2300	2550	2850	3150	
AJA2429	LCHC0060UWC000B	114N2335	90	1350	1550	1850	2100	2400	2700	3050	3400	3800	4200	4600	N/A
			95	1250	1450	1700	1950	2250	2550	2900	3200	3600	3950	4350	
			100	1150	1350	1600	1850	2100	2400	2700	3050	3400	3750	4100	
				950	1150	1400	1600	1850	2150	2400	2700	3050	3350		
M4FL0067 FJAF075	LCHC0075UWC000B LCHC0075UWC000N	114N2337 114N2338	90	1450	1800	2150	2550	2950	3400	3900	4400	4950	5550	6200	N/A
			95	1400	1750	2100	2450	2900	3350	3800	4300	4850	5450	6100	
			100		1650	2000	2400	2800	3250	3750	4250	4800	5350	6000	
			110						3100	3600	4100	4650	5200		
AWA2448 FJALA100 FJALA101 FJALA103 FJALA102	LCHC0100UWD000N	114N2339	90	1700	2250	2800	3400	4000	4650	5350	6000	6800	7550	8400	N/A
			95	1550	2100	2650	3200	3850	4500	5150	5850	6600	7400	8250	
			100		1900	2500	3050	3650	4300	5000	5700	6450	7250	8100	
			110						4000	4700	5400	6150	7000		
	LCHC0150UWF000N LCHC0150UWF000Q LCZB0150UWF000R	114N6725 114N6726 114N6727	90	2911	3625	4394	5214	6082	6993	7944	8929				6.81 6.63
			95	2657	3342	4076	4858	5683	6547	7447	8378				
			100	2405	3060	3761	4504	5286	6104	6954	7831				
			105		2781	3448	4153	4893	5664	6464	7288				
			110			3138	3805	4503	5228	5979	6750				
AWA2479 AWA2490 AVA2510 FJALB200 FJALA225	LCHC0200UWF000N LCHC0200UWF000Q LCHC0200UWF000R	114N6729 114N6730 114N6731	90	4571	5324	6147	7041	8004	9036	10130	11290				3.61 3.50 3.51
			95	4227	4943	5724	6572	7486	8465	9505	10600				
			100	3898	4579	5320	6122	6987	7913	8898	9938				
			105		4230	4932	5690	6507	7381	8310	9292				
			110			4559	5275	6044	6866	7741	8665				
AVA2512 AVA2515 VJAL025V FJALB301 VJAL035Z	LCHC0300UWF300N LCHC0300UWF300Q LCZB0300UWF300R	114N6733 114N6734 114N6735	90	5850	7248	8720	10240	11800	13360	14910	16420				3.19
			95	5375	6708	8104	9544	11010	12470	13920	15320				
			100	4889	6158	7480	8837	10210	11580	12920	14220				
			105		5601	6849	8124	9406	10680	11920	13120				
			110			6213	7406	8600	9777	10920	12020				
VJAL040Z VJAL050Z	LCHC0400UWF000N LGHC0400UWF000Q LGHC0400UWF000R	114N6737 114N6738 114N6739	90	9106	11160	13370	15740	18250	20910	23700	26610				3.29
			95	8364	10340	12470	14740	17150	19690	22350	25120				
			100	7626	9529	11570	13750	16050	18470	21000	23640				
			105		8723	10680	12750	14950	17250	19660	22150				
			110			9791	11770	13850	16040	18320	20670				
CJDL0600	LGHC0600UWF000Q LGHC0600UWF000R	114N6741 114N6742	90	14890	17940	21250	24820	28630	32690	36990	41500				3.66 3.63
			95	13630	16570	19760	23180	26830	30700	34800	39090				
			100	12340	15170	18230	21500	24980	28670	32560	36640				
			105		13750	16670	19790	23110	26610	30300	34160				
			110			15100	18060	21210	24530	28020	31660				
CPDK0600	LGHC0750UWF000Q LGHC0750UWF000R	114N6744 114N6745	90	20210	24010	28100	32460	37070	41920	46960	52180				3.47 3.45
			95	18820	22450	26350	30500	34880	39470	44230	49160				
			100	17400	20870	24580	28520	32660	36990	41480	46110				
			105		19280	22800	26520	30430	34500	38710	43050				
			110			21010	24510	28180	31990	35930	39980				

¹ Ambient temperature = 90 °F, Return gas = 65 °F, Subcooling = 5 °F

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units

The Danfoss Optyma™ Slim line of outdoor condensing units range in size from 1 to 10 hp for low and medium temperature applications for R-134a, R-404a, and R-507. With a contractor-friendly, open design the Optyma Slim is easy to install and service. Equipped with high quality Danfoss components, it provides reliable and efficient performance.

Features Optyma™ Slim



Nomenclature / Model No.

	Application	Design	Refrigerant	Condenser size	HP rating	Certification	Version	Electrical code															
OP-	H	N	X	M	0300	U	WG000	Q															
Application: L: low H: medium / high U: universal low / medium / high			Design: C: air cooled condenser, single fan, recip J: air cooled condenser, slim design, recip G: air cooled condenser, twin fan, recip N: air cooled condenser, slim design, scroll R: air cooled condenser, twin fan, scroll			Refrigerant: G: R-134a H: R-404A/R-507A/R-452A M: R-22 replacement Z: R-404A/R-507A/R-134a*/R-448A/R-449A/R-452A X: R-448A/R-449A/R-404A/R-507A/R-134a/R-452A Y: R-448A/R-449A/R-404A/R-507A/R-452A			Condenser type and rating: C: fin and tube condenser size 110 °F ambient M: microchannel condenser size 115 °F ambient			HP rating: HP rating in hundredths of HP, i.e.: 0033 = 1/3 HP, 0100 = 1 HP			Certification: R: UL recognized U: UL listed			Electrical code: B: compressor & fan(s), 115V, 1ph, 60 Hz N: compressor & fan(s), 230V, 1ph, 60 Hz Q: compressor 208-230V, 3ph, 60 Hz fan(s) 230V, 1ph, 60 Hz R: compressor 460V, 3ph, 60 Hz fan(s) 460V, 1ph, 60 Hz			Version: WA: power cord WB: power cord, receiver WC: electrical box, receiver WD: electrical box, receiver, low pressure control WE: electrical box, receiver, dual pressure control, fan cycling control, larger than 3 HP dual fan units use KPU fan cycling control WF: WE and filter drier, sight glass, solenoid valve with coil WG: electrical box, receiver, dual pressure control, fan speed controller, defrost timer, outdoor enclosure (MBP) WH: electrical box, receiver, dual pressure control, fan speed controller, defrost timer, outdoor enclosure, suction accumulator (LBP) WJ: electrical box, receiver, dual pressure control, fan cycling control, filter drier, sight glass		

Technical data and ordering

Optyma™ Slim - Outdoor Condensing Units (1/7)

R-448A MBP/ R-449A MBP		Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)							AWEF ¹ rating
Danfoss Model No.	Danfoss Code No.		10	15	20	25	30	35	40	
HJZM0150UWG000N HJZM0150UWG000Q	114N3485 114N3486	90	7668	8819	10040	11330	12680	14100	15590	8.72
		95	7224	8330	9503	10740	12040	13410	14830	
		100	6791	7852	8978	10170	11420	12720	14090	
		110		6929	7960	9049	10190	11390	12640	
		115		6484	7469	8508	9599	10740	11930	
HNXM0200UWG000N HNXM0200UWG000Q	114N3487 114N3488	90	12910	14400	15990	17690	19490	21400	23430	8.98 9.37
		95	12460	13900	15430	17070	18810	20650	22610	
		100	12010	13390	14870	16450	18120	19900	21780	
		110		12370	13730	15190	16730	18370	20110	
		115		11850	13160	14550	16030	17600	19270	
HNXM0250UWG000N HNXM0250UWG000Q	114N3489 114N3490	90	16790	18660	20650	22770	25020	27390	29900	9.17 9.60
		95	16240	18040	19960	22000	24170	26460	28870	
		100	15690	17420	19260	21230	23310	25510	27830	
		110		16140	17840	19640	21560	23580	25730	
		115		15480	17110	18840	20670	22610	24660	
HNXM0300UWG000N HNXM0300UWG000Q	114N3491 114N3492	90	17760	19770	21910	24180	26580	29120	31800	9.28 9.61
		95	17130	19070	21130	23320	25630	28080	30660	
		100	16490	18360	20340	22440	24670	27030	29510	
		110		16900	18730	20660	22710	24880	27170	
		115		16160	17900	19750	21710	23790	25980	
HNXM0350UWG000N HNXM0350UWG000Q	114N3493 114N3494	90	22170	24600	27190	29960	32890	35990	39270	9.98 10.63
		95	21400	23740	26230	28890	31700	34690	37840	
		100	20620	22860	25250	27800	30500	33360	36390	
		110		21060	23240	25560	28030	30650	33420	
		115		20140	22210	24420	26770	29260	31900	
HNXM0400UWG000N HNXM0400UWG000Q	114N3495 114N3496	90	26300	29140	32180	35420	38860	42510	46370	10.13 10.59
		95	25260	28000	30920	34040	37360	40890	44610	
		100	24200	26830	29640	32640	35830	39220	42810	
		110		24410	26980	29730	32670	35800	39110	
		115		23180	25620	28240	31040	34030	37210	
HRXM0500UWG000N HRXM0500UWG000Q	114N3497 114N3498	90	31640	32500	39050	43210	47670	52450	57540	9.47 10.01
		95	30560	33980	37700	41710	46020	50630	55560	
		100	29480	32760	36330	40180	44340	48790	53550	
		110		30290	33550	37090	40920	45040	49460	
		115		29050	32150	35530	39190	43140	47380	
HRXM0600UWG000Q	114N3499	90	38490	42850	47520	52510	57830	63480	69460	10.02
		95	37070	41280	45790	50610	55760	61220	67020	
		100	35650	39700	44050	48710	53670	58950	64550	
		110		36520	40550	44850	49450	54360	59570	
		115		34920	38780	42910	47320	52040	57060	
HRXM0600UWG000R	114N3519	90	38120	42410	46990	51880	51090	62610	68440	10.02
		95	36710	40840	45270	49990	55020	60350	66000	
		100	35280	39260	43530	48080	52930	58080	63540	
		110		36080	40020	44220	48710	53490	58560	
		115		34470	38240	42270	46580	51170	56040	
HNXM0700UWG000Q	114N3500	90	42340	47050	52070	57410	63070	69060	75370	9.83
		95	40720	45260	50110	55260	60720	66490	72580	
		100	39070	43440	48100	53060	58320	63880	69750	
		110		39700	43980	48540	53380	58510	63930	
		115		37770	41860	46120	50840	55760	60960	

¹ Annual Walk-in Energy Factor

Full range of models (refrigerants, capacities, and voltage codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units (1/7) *continued*

R-448A MBP/		Ambient	Capacity range in btu/h							AWEF ¹
R-449A MBP		temperature (°F)	at evaporating temperature (°F)							rating
Danfoss Model No.	Danfoss Code No.		10	15	20	25	30	35	40	
HRXM0700UWG000R	114N3520	90	41800	46410	51310	56510	62000	67800	73900	10.16
		95	40180	44620	49340	54340	59640	65230	71100	
		100	38520	42780	47320	52130	57230	62600	68260	
		110		39010	43170	47580	52260	57210	62420	
		115		37070	41040	45250	49710	54440	59430	
HNXM0750UWG000Q	114N3501	90	51070	56740	62810	69310	76240	83610	91420	10.28
		95	49310	54780	60640	66910	73590	80710	88260	
		100	47530	52790	58430	64470	70910	77770	85060	
		110		48720	53920	59480	65420	71770	78510	
		115		46650	51620	56940	62630	68700	75180	
HRXM0750UWG000R	114N3521	90	50680	56260	62240	68620	75410	82630	90260	10.78
		95	48910	54300	60060	66210	72760	79730	87100	
		100	47120	52300	57840	63760	70080	76780	83900	
		110		48230	53320	58770	64580	70770	77340	
		115		46150	51010	56220	61780	67700	74000	
HRXM1000UWG000Q	114N3502	90	62370	69580	77310	85550	94330	103600	113500	10.20
		95	59830	66820	74300	82280	90790	99810	109400	
		100	57230	63980	71210	78930	87150	95890	105200	
		110		58100	64800	71980	79630	87770	96420	
		115		55060	61490	68380	75740	83580	91920	
HRXM1000UWG000R	114N3522	90	61710	68800	76380	84460	93040	102100	111700	10.20
		95	59160	66020	73360	81170	89480	98290	107600	
		100	56540	63170	70250	77800	85830	94350	103400	
		110		57250	63810	70810	78270	86190	94580	
				54190	60470	67190	74360	81970	90060	

¹Annual Walk-in Energy Factor

Full range of models (refrigerants, capacities, and voltage codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units (2/7)

R-134a MBP		Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)							AWEF ¹ rating
Danfoss Model No.	Danfoss Code No.		10	15	20	25	30	35	40	
HJZM0150UWG000N HJZM0150UWG000Q	114N3485 114N3486	90	4842	5722	6684	7725	8847	10050	11330	7.76 7.93
		95	4571	5415	6336	7334	8408	9558	10780	
		100	4297	5106	5987	6941	7968	9067	10240	
		110		4486	5288	6156	7088	8086	9147	
		115		4176	4940	5765	6651	7598	8606	
HNXM0200UWG000N HNXM0200UWG000Q	114N3487 114N3488	90	8480	9651	10900	12220	13630	15140	16730	8.11 8.93
		95	8207	9349	10570	11860	13240	14710	16280	
		100	7932	9041	10230	11490	12840	14270	15800	
		110		8422	9532	10720	12000	13360	14810	
		115		8113	9183	10330	11560	12880	14290	
HNXM0250UWG000N HNXM0250UWG000Q	114N3489 114N3490	90	10900	12380	13960	15640	17440	19350	21380	8.04 9.26
		95	10530	11980	13520	15170	16930	18800	20770	
		100	10160	11570	13070	14680	16400	18220	20150	
		110		10750	12170	13690	15310	17030	18850	
		115		10350	11720	13180	14750	16420	18180	
HNXM0300UWG000N HNXM0300UWG000Q	114N3491 114N3492	90	11600	13160	14830	16600	18480	20480	22600	8.25 9.48
		95	11220	12740	14370	16100	17940	19890	21960	
		100	10830	12310	13890	15580	17370	19280	21300	
		110		11430	12910	14500	16190	18000	19920	
		115		10980	12420	13950	15590	17340	19200	
HNXM0350UWG000N HNXM0350UWG000Q	114N3493 114N3494	90	14440	16380	18460	20690	23060	25580	28260	8.54 10.39
		95	13970	15870	17900	20070	22390	24860	27480	
		100	13500	15340	17320	19440	21700	24110	26660	
		110		14270	16130	18120	20250	22530	24950	
		115		13740	15520	17440	19500	21710	24050	
HNXM0400UWG000N HNXM0400UWG000Q	114N3495 114N3496	90	17090	19430	21920	24550	27340	30300	33440	9.05 10.46
		95	16540	18820	21230	23800	26530	29420	32490	
		100	15980	18190	20540	20340	25690	28510	31500	
		110		16940	19130	21470	23960	26610	29430	
		115		16320	18420	20670	23070	25630	28360	
HRXM0500UWG000N HRXM0500UWG000Q	114N3497 114N3498	90	20530	23340	26340	29530	32930	36540	40390	8.44 9.40
		95	19880	22620	25540	28660	31990	35530	39300	
		100	19210	21880	24730	27770	31020	34480	38170	
		110		20370	23050	25920	29000	32280	35790	
		115		19620	22200	24980	27950	31140	34540	
HRXM0600UWG000Q	114N3499	90	25440	28790	32430	36360	40560	45040	49790	9.77
		95	24570	27840	31390	35210	39310	43680	48300	
		100	23680	26860	30310	34034	38030	42280	46770	
		110		24830	28090	31610	35380	39390	43630	
		115		23800	26960	30370	34020	37910	42030	
HRXM0600UWG000R	114N3519	90	25360	28690	32310	36220	40400	44840	49550	10.43
		95	24490	27740	31270	35070	39140	43470	48060	
		100	23590	26760	30190	33890	37860	42070	46530	
		110		24730	27970	31460	35200	39180	43390	
		115		23700	26840	30220	33850	37700	41780	
HNXM0700UWG000Q	114N3500	90	26930	30440	34250	38340	42720	47380	52310	9.76
		95	26040	29450	33160	37150	41410	45950	50750	
		100	25120	28440	32050	35930	40070	44490	49160	
		110		26370	29750	33410	37320	41480	45880	
		115		25310	28590	32120	35910	39940	44210	

¹Annual Walk-in Energy Factor

Full range of models (refrigerants, capacities, and voltage codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units (2/7) *continued*

R-134a MBP		Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)							AWEF ¹ rating
Danfoss Model No.	Danfoss Code No.		10	15	20	25	30	35	40	
HRXM0700UWG000R	114N3520	90	26850	30340	34120	38190	42540	47160	52050	9.79
		95	25030	29350	33030	37000	41230	45730	50490	
		100	25030	28340	31920	35770	39890	44270	48900	
		110		26260	29620	33250	37130	41260	45620	
		115		25200	28460	31970	35720	39720	43950	
HNXM0750UWG000Q	114N3501	90	32660	36870	41410	46290	51500	57050	62950	9.66
		95	31670	35770	40190	44940	50020	55440	61200	
		100	30690	34660	38950	43570	48520	53800	59400	
		110		32410	36430	40770	45430	50410	55700	
		115		31280	35150	39340	43850	48670	53800	
HRXM0750UWG000R	114N3521	90	32600	36800	41330	46190	51380	56910	62790	9.73
		95	31620	35700	40110	44840	49910	55300	61030	
		100	30630	34590	38870	43470	48400	53650	59240	
		110		32350	36350	40670	45310	50260	55530	
		115		31210	35070	39240	43730	48520	53630	
HRXM1000UWG000Q	114N3502	90	41830	47000	52650	58760	65320	72310	79710	9.84
		95	40540	45600	51120	57090	63490	70290	77490	
		100	39210	44160	49550	55380	61610	68230	75220	
		110		41150	46280	51800	57700	63950	70540	
		115		39580	44580	49950	55680	61750	68130	
HRXM1000UWG000R	114N3522	90	41740	46890	52510	58600	65130	72080	79430	9.49
		95	40450	45490	50990	56930	63290	70060	77210	
		100	39120	44040	49410	55210	61410	67990	74940	
		110		41020	46130	51630	57500	63710	70250	
				39450	44430	49780	55470	61500	67840	

¹Annual Walk-in Energy Factor

Full range of models (refrigerants, capacities, and voltage codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units (3/7)

R-404A LBP/ R-507MBP		Ambient temperature (°F)								AWEF ¹ rating
Danfoss Model No.	Danfoss Code No.		10	15	20	25	30	35	40	
HJZM0150UWG000N HJZM0150UWG000Q	114N3485 114N3486	90	9048	10350	11676	13124	14644	16232	17847	7.85 7.85
		95	8504	9749	11017	12399	13848	15363	16904	
		100	7957	9146	10355	11672	13052	14492	15960	
		110		8138	9249	10458	11723	13042	14388	
		115		7532	8585	9730	10927	12175	13449	
HNXM0200UWG000N HNXM0200UWG000Q	114N3487 114N3488	90	14640	16250	17950	19740	21590	23520	25490	10.06 10.04
		95	13970	15520	17150	18870	20650	22490	24380	
		100	13290	14780	16340	17990	19700	21460	23260	
		110		13240	14680	16180	17750	19350	20990	
		115		12440	13820	15260	16750	18280	19850	
HNXM0250UWG000N HNXM0250UWG000Q	114N3489 114N3490	90	19080	20970	22970	25090	27320	29670	32130	9.81 10.09
		95	18290	20100	22020	24040	26180	28430	30800	
		100	17490	19210	21040	22980	25030	27180	29450	
		110		17390	19050	20810	22670	24640	26710	
		115		16450	18020	19690	21470	23340	25320	
HNXM0300UWG000N HNXM0300UWG000Q	114N3491 114N3492	90	20150	22110	24190	26400	28730	31190	33790	9.65 10
		95	19300	21180	23180	25290	27530	29890	32390	
		100	18420	20220	22140	24160	26310	28580	30970	
		110		18230	19980	21840	23800	25890	28090	
		115		17190	18860	20630	22510	24510	26630	
HNXM0350UWG000N HNXM0350UWG000Q	114N3493 114N3494	90	25330	27850	30510	33300	36230	39270	42440	10.65 10.9
		95	24270	26680	29230	31910	34720	37640	40680	
		100	23170	25480	27930	30490	33180	35980	38900	
		110		22980	25210	27560	30020	32580	35250	
		115		21670	23800	26040	28390	30840	33400	
HNXM0400UWG000N HNXM0400UWG000Q	114N3495 114N3496	90	28880	31820	34900	38120	41480	44960	48570	9.87 10.82
		95	27590	30400	33360	36450	39660	43010	46470	
		100	26270	28960	31790	34740	37820	41020	44340	
		110		25990	28570	31250	34060	36970	40000	
		115		24470	26910	29470	32140	34920	37800	
HRXM0500UWG000N HRXM0500UWG000Q	114N3497 114N3498	90	35730	39530	43530	47720	52110	56690	61440	9.58 10.40
		95	34120	37770	41630	45690	49930	54360	58960	
		100	32480	35990	39700	43610	47700	51970	56420	
		110		32350	35750	39340	43110	47060	51190	
		115		30520	33750	37170	40770	44560	48510	
HRXM0600UWG000Q	114N3499	90	43050	47300	51790	56540	61520	66740	72210	10.41
		95	41250	45320	49630	54180	58960	63980	69220	
		100	39410	43310	47430	51780	56360	61170	66200	
		110		39140	42890	46860	51040	55430	60040	
		115		36980	40550	44320	48310	52500	56900	
HRXM0600UWG000R	114N3519	90	42760	46970	51400	56080	60990	66130	71500	10.94
		95	40970	44990	49420	53720	58430	63360	68520	
		100	39130	42970	47040	51330	55830	60560	65500	
		100		38790	42490	46400	50510	54830	59350	
		115		36630	40150	43860	47780	51900	56220	
HNXM0700UWG000Q	114N3500	90	46560	51140	55980	61060	66380	71930	77700	10.45
		95	44590	48980	53610	58470	63570	68890	74420	
		100	42570	46760	51180	55830	60700	65790	71080	
		110		42140	46150	50360	54790	59420	64250	
		115		39740	43540	47540	51750	56160	60760	

¹Annual Walk-in Energy Factor

Full range of models (refrigerants, capacities, and voltage codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.
Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units (3/7) *continued*

R-404A MBP/ R-507MBP		Ambient temperature (°F)								AWEF ¹ rating
Danfoss Model No.	Danfoss Code No.		10	15	20	25	30	35	40	
HRXM0700UWG000R	114N3520	90	46220	50750	55520	60520	65760	71210	76870	10.76
		95	44250	48580	53140	57930	62940	68160	73590	
		100	42230	46360	50710	55290	60070	65070	70260	
		110		41730	45670	49820	54170	58710	63440	
		115		39320	43060	47000	51120	55450	59960	
HNXM0750UWG000Q	114N3501	90	56950	63010	69380	76050	83030	90340	97970	10.66
		95	54160	59960	66040	72410	79070	86030	93300	
		100	51290	56830	62620	68670	75010	81620	88520	
		110		50310	55510	60940	66610	72520	78690	
		115		46940	51840	56950	62280	67840	73640	
HRXM0750UWG000R	114N3521	90	56660	62700	69070	75750	82720	89980	97500	10.37
		95	53860	59640	65720	72100	78750	85670	92850	
		100	50980	56480	62270	68340	74680	81260	88090	
		110		49920	55110	60560	66240	72140	78260	
		115		46510	51400	56530	61880	67440	73210	
HRXM1000UWG000Q	114N3502	90	72760	79770	87190	95020	103300	111900	120900	10.12
		95	69610	76280	83330	90760	98580	106800	115400	
		100	66390	72700	79370	86410	93800	101600	109700	
		110		65300	71210	77440	84000	90890	98100	
		115		61460	67000	72830	78970	85420	92190	
HRXM01000UWG000R	114N3522	90	72440	79400	86750	94500	102600	111200	120100	10.05
		95	69300	75900	82880	90230	97960	106100	114500	
		100	66070	72330	78930	85880	93190	100900	108900	
		110		64910	70760	76920	83390	90190	97300	
		115		61080	66550	72310	78370	84730	91400	

¹Annual Walk-in Energy Factor

Full range of models (refrigerants, capacities, and voltage codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units (4/7)

R-452A MBP		Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)							AWEF ¹ rating
Danfoss Model No.	Danfoss Code No.		10	15	20	25	30	35	40	
HJZM0150UWG000N HJZM0150UWG000Q	114N3485 114N3486	90	8675	9829	11050	12340	13690	15100	16570	8.09 8.09
		95	8167	9269	10440	11660	12950	14290	15690	
		100	7662	8712	9822	10990	12210	13490	14820	
		110		7606	8606	9658	10760	11910	13100	
		115		7059	8005	8999	10040	11120	12250	
HNXM0200UWG000N HNXM0200UWG000Q	114N3487 114N3488	90	14020	15500	17070	18730	20490	22340	24290	8.48 8.75
		95	13490	14900	16400	18000	19680	21450	23310	
		100	12930	14280	15720	17240	18850	20540	22320	
		110		13000	14300	15670	17120	18660	20270	
		115		12340	13560	14860	16240	17690	19230	
HNXM0250UWG000N HNXM0250UWG000Q	114N3489 114N3490	90	17940	19830	21830	23940	26150	28740	30900	8.65 8.81
		95	17220	19030	20940	22960	25080	27300	29620	
		100	16470	18210	20030	21960	23980	26100	28320	
		110		16500	18150	19890	21720	23640	25650	
		115		15620	17190	18830	20560	22380	24290	
HNXM0300UWG000N HNXM0300UWG000Q	114N3491 114N3492	90	18820	20800	22890	25100	27430	29870	32420	8.66 8.83
		95	18050	19940	21940	24060	26280	28620	31070	
		100	17250	19060	20970	22990	25110	27340	29680	
		110		17220	18940	20770	22690	24710	26840	
		115		16270	17900	19620	21450	23360	25380	
HNXM0350UWG000N HNXM0350UWG000Q	114N3493 114N3494	90	23480	25980	28640	31450	34410	37530	40790	9.64 9.76
		95	22490	24900	27450	30150	32990	35980	39120	
		100	21490	23800	26240	28830	31550	34420	37430	
		110		21530	23760	26110	28600	31230	33980	
		115		20360	22480	24730	27100	29600	32240	
HNXM0400UWG000N HNXM0400UWG000Q	114N3495 114N3496	90	27420	30250	33240	36400	39720	43200	46830	9.29 9.74
		95	26330	29040	31900	34920	38100	41430	44910	
		100	25210	27800	30530	33410	36440	39620	42950	
		110		25210	27670	30280	33020	35910	38940	
		115		23870	26200	28670	31270	34010	36890	
HRXM0500UWG000N HRXM0500UWG000Q	114N3497 114N3498	90	33490	37040	40820	44840	49100	53590	58330	9.52 10.06
		95	32190	35580	39210	43050	47130	51440	55980	
		100	30850	34100	37560	41230	45130	49240	53580	
		110		31020	34150	37470	41000	44740	48690	
		115		29440	32390	35540	38890	42440	46190	
HRXM0600UWG000Q	114N3499	90	40810	44950	49360	54040	58980	64190	69670	9.53
		95	39180	43130	47340	51800	56510	61490	66730	
		100	37520	41280	45270	49520	54010	58750	63750	
		110		37480	41060	44860	48890	53170	57680	
		115		35540	38900	42480	46290	50330	54610	
HRXM0600UWG000R	114N3519	90	40670	44780	49150	53780	58670	63820	69230	9.89
		95	39040	42950	47120	51540	56200	61120	66290	
		100	37380	41100	45060	49260	53700	58380	63310	
		110		37290	40830	44580	48560	52770	57220	
		115		35340	38660	42190	45940	49910	54110	
HNXM0700UWG000Q	114N3500	90	44500	49090	53970	59130	64580	70310	76320	9.81
		95	42630	47020	51680	56620	61830	67320	73080	
		100	40720	44900	49350	54050	59030	64270	69780	
		110		40550	44550	48790	53280	58030	63050	
		115		38330	42090	46100	50350	54860	59620	

¹Annual Walk-in Energy Factor

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units (4/7) *continued*

R-452A MBP		Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)							AWEF ¹ rating
Danfoss Model No.	Danfoss Code No.		10	15	20	25	30	35	40	
HRXM0700UWG000R	114N3520	90	44160	48690	53480	58560	63900	69510	75390	10.52
		95	42290	46610	51190	56040	61150	66520	72150	
		100	40380	44490	48850	53470	58340	63470	68850	
		110		40130	44040	48180	52570	57200	62070	
		115		37880	41560	45470	49610	53990	58610	
HRXM0750UWG000Q	114N3501	90	53900	59650	65770	72280	79180	86470	94150	10.30
		95	51680	57210	63090	69350	75980	82990	90380	
		100	49420	54710	60350	66340	72700	79430	86520	
		110		49540	54670	60140	65940	72090	75600	
		115		46880	51750	56940	62470	68330	74550	
HRXM0750UWG000R	114N3521	90	53730	59450	65540	72000	78850	86080	93690	10.00
		95	51520	57010	62860	69070	75640	82590	89920	
		100	49250	54510	60110	66060	72370	79030	86060	
		110		49340	54430	59840	65590	71680	78110	
		115		46660	51490	56630	62100	67890	74030	
HRXM1000UWG000Q	114N3502	90	67150	74200	81650	89500	97760	106400	115500	9.95
		95	64380	71130	78720	85800	93710	102000	110700	
		100	61540	68000	74820	82020	89590	97530	105800	
		110		61520	67700	74220	81090	88310	95890	
		115		58180	64040	70220	76740	83600	90810	
HRXM1000UWG000R	114N3522	90	66860	73850	81230	89000	97170	105700	114600	9.69
		95	64080	70780	77850	85300	93120	101300	109900	
		100	61240	67640	74400	81510	88990	96820	105000	
		110		61140	67250	73680	80460	87560	95010	
		115		57790	63560	69650	76070	82810	89880	

¹Annual Walk-in Energy Factor

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

Optyma™ Slim - Outdoor Condensing Units (5/7)

R-448A LBP/ R-449A LBP		Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)								AWEF ² rating
Danfoss Model No.	Danfoss Code No.		-25	-20	-15	-10	-5	0	5	10	
LNYM0400UWH000Q	114N3652	90	11030	12470	14030	15720	17550	19500	21590	23820	3.40
		95		12090	13590	15220	16970	18850	20850	22980	
		100			13140	14700	16380	18180	20100	22140	
		105				14170	15770	17490	19330	21270	
		110					15150	16790	18540	20400	
LNYM0500UWH000Q	114N3653	90	13550	15280	17170	19210	21420	23800	26350	29070	3.46
		95		14850	16660	18620	20730	23000	25430	28020	
		100			16140	18010	20020	22180	24500	26960	
		105				17380	19300	21350	23550	25890	
		110					18550	20500	22580	24790	
LNYM0600UWH000Q	114N3654	90	16310	18430	20730	23220	25930	28840	31960	35290	3.53
		95		17890	20110	22500	25090	27870	30860	34040	
		100			19460	21750	24230	26880	29730	32770	
		105				20970	23330	25860	28570	31460	
		110					22400	24810	27380	30120	
LRYM0800UWH000Q	114N3655	90	20080	22620	25360	28340	31540	34990	38670	42590	3.39
		95		21970	24620	27480	30560	33860	37390	41150	
		100			23850	26590	29540	32700	36080	39680	
		105				25660	28490	31510	34730	38170	
		110					27390	30270	33340	36610	

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

² model is not US DOE AWEF compliant.

Optyma™ Slim - Outdoor Condensing Units (6/7)

R-404A LBP/ R-507LBP		Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)								AWEF ² rating
Danfoss Model No.	Danfoss Code No.		-25	-20	-15	-10	-5	0	5	10	
LJHM0150UWH000N LJHM0150UWH000Q	114N3508 114N3509	90	5545	6509	7537	8627	9776	10980	12240	13550	3.55 3.37
		95		6092	7069	8104	9193	10340	11530	12770	
		100			5676	6603	7582	8612	9691	10820	
		105				6138	7063	8034	9050	10110	
		110					6547	7460	8413	9404	
LJHM0200UWH000N LJHM0200UWH000Q	114N3518 114N3511	90	7671	8785	9994	11300	12700	14190	15770	17430	3.68 3.57
		95		8211	9358	10600	11930	13350	14850	16430	
		100			7661	8746	9920	11180	12530	13950	
		105				8159	9267	10460	11730	13090	
		110					8638	9761	10960	12240	
LNYM0400UWH000Q	114N3652	90	13650	15330	17130	19030	21050	23190	25440	27810	3.79
		95		14750	16460	18280	20200	22230	24370	26610	
		100			15780	17510	19330	21250	23270	25390	
		105				16720	18440	20250	22160	24150	
		110					17530	19230	21020	22880	
LNYM0500UWH000Q	114N3653	90	16480	18500	20670	23000	25500	28160	30980	33960	3.75
		95		17780	19850	22070	24440	26970	29650	32480	
		100			19010	21120	23370	25760	28300	30980	
		105				20150	22280	24540	26930	29460	
		110					21160	23290	25540	27920	
LNYM0600UWH000Q	114N3654	90	20030	22520	25230	28160	31310	34690	38300	42150	3.57
		95		21680	24270	27060	30060	33280	36720	40380	
		100			23280	25940	28790	31850	35110	38580	
		105				24790	27500	30390	33480	36770	
		110					26180	28910	31830	34930	
LRYM0600UWH000R	114N3523	90	19970	22450	25140	28050	31170	34520	38470	42590	3.84
		95		21600	24170	26940	29920	33110	36500	40320	
		100			23180	25820	28650	31670	34890	38300	
		105					26030	28740	31670	34800	
		110						27230	29900	32680	
LRYM0800UWH000Q	114N3655	90	24700	27740	31303	34560	38360	42410	46720	51290	3.72
		95		26680	29810	33190	36800	40650	44750	49090	
		100			28580	31780	35210	38870	42750	46870	
		105				30350	33600	37060	40730	44610	
		110					31950	35210	38670	42330	
LRYM0800UWH000R	114N3524	90	24600	27620	30880	34380	38130	42140	46120	50320	3.86
		95		26560	29670	33000	36580	40380	44320	48420	
		100			28403	31600	34990	38600	42490	46590	
		105					31730	34940	38420	42490	
		110						33060	36690	40680	

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

² model is not US DOE AWEF compliant.

Optyma™ Slim - Outdoor Condensing Units (7/7)

R-452A LBP		Ambient temperature (°F)	Capacity range in btu/h at evaporating temperature (°F)					AWEF ² rating
Danfoss Model No.	Danfoss Code No.		-20	-15	-10	-5	0	
LJHM0150UWH000N LJHM0150UWH000Q	114N3508 114N3509	90	6103	7084	8152	9300	10520	3.45 3.48
		95		6653	7663	8750	9906	
		100			7174	8799	9290	
		110				7098	8058	
		115					7445	
LJHM0200UWH000N LJHM0200UWH000Q	114N3518 114N3511	90	8460	9798	11200	12640	14120	3.29 3.37
		95		9220	10550	11920	13320	
		100			9905	11200	12520	
		110				9758	10920	
		115					10120	
LNYM0400UWH000Q	114N3652	90	13370	15000	16750	18620	20620	3.50
		95		14400	16080	17870	19780	
		100			15400	17110	18940	
		110				15550	17200	
		115					16320	
LNYM0500UWH000Q	114N3653	90	16540	18510	20630	22900	25320	3.65
		95		17760	19790	21960	24290	
		100			18940	21020	23240	
		110				19090	21100	
		115					20020	
LNYM0600UWH000Q	114N3654	90	19770	22140	24710	27470	30430	3.78
		95		21300	23750	26390	29220	
		100			22780	25300	28000	
		110				23060	25500	
		115					24220	
LRYM0600UWH000R	114N3523	90	19700	22070	24610	27350	30280	3.60
		95		21220	23660	26270	29070	
		100			22680	25180	27850	
		110				22930	25340	
		115					24060	
LRYM0800UWH000Q	114N3655	90	24420	27320	30440	33770	37320	3.44
		95		26290	29260	32430	35810	
		100			28050	31070	34270	
		110				28230	31100	
		115					29470	
LRYM0800UWH000R	114N3524	90	24300	27180	30260	33540	37030	3.58
		95		26140	29070	32200	35520	
		100			27860	30830	33980	
		110				27980	30790	
		115					29140	

Full range of models (refrigerants, capacities, and voltages codes), spare parts, and more available at <https://bit.ly/CUCatalogNAM>.

Check Coolselector or contact Danfoss.

² model is not US DOE AWEF compliant.

Scan the QR Code for the full range of condensing units or visit <https://bit.ly/CUCatalogNAM>.



Optyma™ Cooler - Walk-in Cooler and Freezer Unit Coolers

The Optyma™ Cooler is an efficient unit cooler for walk-in coolers and freezers, available in both US DOE AWEF and NRCan compliant models. This compact unit uses cross-rifled heat exchanger tubing with a corrugated fin design and comes equipped with a maintenance-free, factory-balanced variable-speed capable fan motor to ensure high efficiency. The °Coolselector°2 app allows for quick optimization, enabling a full walk-in solution and providing peace of mind to contractors and end users.



OPTYMA DACC R X L 041.1 A 4 / A 1 H

Product Family:
Optyma

Model Type:
DACC – Cubic

Refrigerant Group:
R-R404A, R507A, R448A, R440A

Feed Type:
X = DX

Model Size:
L – Low Profile
M – Medium Profile
H – High Profile

Nominal Capacity:
BTU/hr / 100

Optimization:
H – for High Profile models and Medium Profile
Blank – Low Profile

Voltage:
1 – 1/230/50-60
2 – 3/380-430/50-60

Defrost Type:
A – Air
E – Electric

Fin Spacing:
4 – 4mm (6 FPI)
6 – 6mm (4 FPI)

Fin Material:
A – Aluminum

Version 1

Low Profile

Danfoss Code No.	6 FPI Air Defrost (Cooler)	Btu/hr	Inlet (in.)	Outlet (in.)
114U0000	Optyma DACC RX L050.1A4/A1	6,340	½	⅝
114U0001	Optyma DACC RX L070.1A4/A1	8,740	½	⅝
114U0002	Optyma DACC RX L100.1A4/A1	12,730	½	⅝
114U0003	Optyma DACC RX L141.1A4/A1	17,700	½	⅝
114U0004	Optyma DACC RX L150.1A4/A1	19,120	½	⅝
114U0005	Optyma DACC RX L210.1A4/A1	25,640	½	⅝
114U0006	Optyma DACC RX L282.1A4/A1	36,250	½	⅞
114U0007	Optyma DACC RX L305.1A4/A1	39,490	½	⅞
114U0008	Optyma DACC RX L354.1A4/A1	44,570	½	⅞
114U0009	Optyma DACC RX L380.1A4/A1	48,770	½	⅞
Danfoss Code No.	6 FPI Electric Defrost (Freezer)	Btu/hr	Inlet (in.)	Outlet (in.)
114U0010	Optyma DACC RX L041.1A4/E1	4,580	½	⅝
114U0011	Optyma DACC RX L063.1A4/E1	6,970	½	⅝
114U0012	Optyma DACC RX L084.1A4/E1	9,290	½	⅝
114U0013	Optyma DACC RX L123.1A4/E1	14,130	½	⅞
114U0014	Optyma DACC RX L127.1A4/E1	14,110	½	⅞
114U0015	Optyma DACC RX L186.1A4/E1	20,430	½	1 ⅛
114U0016	Optyma DACC RX L233.1A4/E1	25,330	½	1 ⅛
114U0017	Optyma DACC RX L260.1A4/E1	28,020	½	1 ⅛
114U0018	Optyma DACC RX L315.1A4/E1	35,230	½	1 ⅜

Medium Profile

Danfoss Code No.	6 FPI Air Defrost (Cooler)	Btu/hr	Inlet (in.)	Outlet (in.)
114U0019	Optyma DAAC RX M345.1A4/A1H	36,770	⅝	⅞
114U0020	Optyma DAAC RX M430.1A4/A1H	47,610	⅝	1 ⅛
114U0021	Optyma DACC RX M515.1A4/A1H	54,250	⅞	1 ⅛
114U0022	Optyma DACC RX M645.1A4/A1H	71,910	⅞	1 ⅛
114U0023	Optyma DACC RX M690.1A4/A1H	73,740	⅞	1 ⅜
114U0024	Optyma DACC RX M865.1A4/A1H	95,420	⅞	1 ⅜
Danfoss Code No.	6 FPI Electric Defrost (Freezer)	Btu/hr	Inlet (in.)	Outlet (in.)
114U0025	Optyma DACC RX M190.1A4/E1H	19,200	⅝	1 ⅛
114U0026	Optyma DACC RX M305.1A4/E1H	29,390	⅞	1 ⅜
114U0027	Optyma DACC RX M385.1A4/E1H	38,470	⅞	1 ⅜
114U0028	Optyma DACC RX M445.1A4/E1H	42,460	⅞	1 ⅝
114U0029	Optyma DACC RX M575.1A4/E1H	55,090	⅞	1 ⅝
114U0030	Optyma DACC RX M715.1A/E1H	70,040	⅞	2 ⅛
Danfoss Code No.	4 FPI Electric Defrost (Freezer)	Btu/hr	Inlet (in.)	Outlet (in.)
114U0031	Optyma DACC RX M250.1A6/E1H	25,020	⅞	1 ⅛
114U0032	Optyma DACC RX M340.1A6/E1H	32,850	⅞	1 ⅜
114U0033	Optyma DACC RX M375.1A6/E1H	36,000	⅞	1 ⅜
114U0034	Optyma DACC RX M505.1A6/E1H	49,360	⅞	1 ⅝
114U0035	Optyma DACC RX M645.1A6/E1H	63,320	⅞	2 ⅛

High Profile

Danfoss Code No.	6 FPI Air Defrost (Cooler)	Btu/hr	Inlet (in.)	Outlet (in.)
114U0036	Optyma DACC RX H0615.1A4/A2H	67,240	⅞	1 ⅛
114U0037	Optyma DACC RX H0750.1A4/A2H	87,230	⅞	1 ⅜
114U0038	Optyma DACC RX H0915.1A4/A2H	101,400	⅞	1 ⅜
114U0039	Optyma DACC RX H1110.1A4/A2H	130,000	⅞	1 ⅝
114U0040	Optyma DACC RX H1475.1A4/A2H	172,800	⅞	1 ⅝
Danfoss Code No.	6 FPI Electric Defrost (Freezer)	Btu/hr	Inlet (in.)	Outlet (in.)
114U0041	Optyma DACC RX H0695.1A4/E2H	69,750	⅞	2 ⅛
114U0042	Optyma DACC RX H1025.1A4/E2H	99,970	1 ⅛	2 ⅛
114U0043	Optyma DACC RX H1200.1A4/E2H	120,600	1 ⅛	2 ⅝
Danfoss Code No.	4 FPI Electric Defrost (Freezer)	Btu/hr	Inlet (in.)	Outlet (in.)
114U0044	Optyma DACC RX H0615.1A6/E2H	62,990	⅞	2 ⅛
114U0045	Optyma DACC RX H0920.1A6/E2H	91,190	⅞	2 ⅛
114U0046	Optyma DACC RX H1100.1A6/E2H	112,100	1 ⅛	2 ⅝

Cooler: 10 °F TD / 25 °F SST
Freezer: 10 °F TD / -20 °F SST

MT/MTZ - Medium/High Temperature Reciprocating Compressors


Known for their legendary durability, Maneurop® reciprocating compressors from Danfoss cover a wide range of operating conditions. Maneurop MT and MTZ series hermetic reciprocating compressors are designed for high and medium temperature applications. These compressors have a large internal free volume that protects against the risk of liquid hammering when liquid refrigerant enters the compressor.

MT/MTZ Reciprocating Compressors



Nomenclature / Model No.

	MT	Z	64	HM	4	B	VE
Compressor type	MT: medium and high temperature reciprocating compressor						Oil equalization port and sight glass
Refrigerant & oil	Blank: R-22, mineral oil Z: R-134a, R-404A, R-407A/C/F, R-452A*, R-448A*, R449A*, R507A, POE oil (*not available for all model numbers)						Evolution index
Nominal Capacity In thousand Btu/h at 60 Hz, ARI Conditions							Motor voltage code 1: 208-230 V / 1 ph / 60 Hz 3: 200-230 V / 3 ph / 60 Hz 4: 380-400 V / 3 ph / 50 Hz 460 V / 3 ph / 60 Hz 5: 230 V / 1 ph / 50 Hz 6: 230 V / 3 ph / 50 Hz 7: 500 V / 3 ph / 50 Hz 575 V / 3 ph / 60 Hz 9: 380 V / 3 ph / 60 Hz
Displacement code (in ³ /rev)	JA: 1.84 HL: 5.87 JC: 2.33 HM: 6.57 JE: 2.93 HN: 7.38 JF: 3.29 HP: 8.29 JG: 3.69 HS: 10.45 JH: 4.14 HU: 13.15 HJ: 4.65 HV: 14.76 HK: 5.23 HW: 16.57						



Technical data and ordering

MT/MTZ -Medium/High Temperature Reciprocating Compressors

Nominal capacity (Btu/h) ²				Connection type Rotolock (in.)	Connection with supplied sleeve (in. ODF)	No. of cylinders	Weight (lbs.)	208–230/1/60		200–230/3/60		460/3/60	
R-22 ³	R-134a ³	R-404A ⁴	R-448A					Danfoss Model No. ¹	Danfoss Code No.	Danfoss Model No. ¹	Danfoss Code No.	Danfoss Model No. ¹	Danfoss Code No.
	R-513A	R-507A ⁴	R-449A										
15903				1 × 1	½ × ¾	1	46	MT18JA1*VE	MT18-1VI	MT18JA3*VE	MT18-3VI	MT18JA4*VE	MT18-4VI
21975				1 × 1 ⁽⁵⁾	½ × ¾ ⁽⁵⁾	1	46	MT22JC1*VE	MT22-1VI⁵	MT22JC3*VE	MT22-3VI	MT22JC4*VE	MT22-4VI
30231				1 × 1 ⁽⁵⁾	½ × ¾ ⁽⁵⁾	1	51	MT28JE1*VE	MT28-1VI⁵	MT28JE3*VE	MT28-3VI	MT28JE4*VE	MT28-4VI
33044				1 ¼ × 1	¾ × ½	1	53	MT32JF1*VE	MT32-1VI	MT32JF3*VE	MT32-3VI	MT32JF4*VE	MT32-4VI
37992				1 ¼ × 1	¾ × ½	1	55	MT36JG1*VE	MT36-1VI	MT36JG3*VE	MT36-3VI	MT36JG4*VE	MT36-4VI
42930				1 ¼ × 1	¾ × ½	1	57	MT40JH1*VE	MT40-1VI	MT40JH3*VE	MT40-3VI	MT40JH4*VE	MT40-4VI
43999				1 ¾ × 1 ¼	¾ × ¾	2	82	MT44HJ1*VE	MT44-1VI	MT44HJ3*VE	MT44-3VI	MT44HJ4*VE	MT44-4VI
50160				1 ¾ × 1 ¼	¾ × ¾	2	82	MT50HK1*VE	MT50-1VI	MT50HK3*VE	MT50-3VI	MT50HK4*VE	MT50-4VI
56420				1 ¾ × 1 ¼	¾ × ¾	2	86	MT56HL1*VE	MT56-1VI	MT56HL3*VE	MT56-3VI	MT56HL4*VE	MT56-4VI
64366				1 ¾ × 1 ¼	¾ × ¾	2	86	MT64HM1*VE	MT64-1VI	MT64HM3*VE	MT64-3VI	MT64HM4*VE	MT64-4VI
74561				1 ¾ × 1 ¼	¾ × ¾	2	88			MT72HN3*VE	MT72-3VI	MT72HN4*VE	MT72-4VI
84977				1 ¾ × 1 ¼	1 ½ × ¾	2	88			MT80HP3*VE	MT80-3VI	MT80HP4*VE	MT80-4VI
95898				1 ¾ × 1 ¼	1 ½ × ¾	4	132			MT100HS3*VE	MT100-3VI	MT100HS4*VE	MT100-4VI
124678				1 ¾ × 1 ¼	1 ½ × ¾	4	141			MT125HU3*VE	MT125-3VI	MT125HU4*VE	MT125-4VI
140697				1 ¾ × 1 ¼	1 ½ × ¾	4	148			MT144HV3*VE	MT144-3VI	MT144HV4*VE	MT144-4VI
156820				1 ¾ × 1 ¼	1 ½ × ¾	4	152			MT160HW3*VE	MT160-3VI	MT160HW4*VE	MT160-4VI
11200	8980	8980		1 × 1	½ × ¾	1	46	MTZ18JA1*VE	MTZ18-1VI	MTZ18JA3*VE	MTZ18-3VI	MTZ18JA4*VE	MTZ18-4VI
14849	12306	12306		1 × 1 ⁽⁵⁾	½ × ¾ ⁽⁵⁾	1	46	MTZ22JC1*VE	MTZ22-1VI⁵	MTZ22JC3*VE	MTZ22-3VI	MTZ22JC4*VE	MTZ22-4VI
19276	15986	15986		1 × 1 ⁽⁵⁾	½ × ¾ ⁽⁵⁾	1	51	MTZ28JE1*VE	MTZ28-1VI⁵	MTZ28JE3*VE	MTZ28-3VI	MTZ28JE4*VE	MTZ28-4VI
20949	17480	17480		1 ¼ × 1	¾ × ½	1	53	MTZ32JF1*VE	MTZ32-1VI	MTZ32JF3*VE	MTZ32-3VI	MTZ32JF4*VE	MTZ32-4VI
24482	20189	20189		1 ¼ × 1	¾ × ½	1	55	MTZ36JG1*VE	MTZ36-1VI	MTZ36JG3*VE	MTZ36-3VI	MTZ36JG4*VE	MTZ36-4VI
27864	23031	23031		1 ¼ × 1	¾ × ½	1	57	MTZ40JH1*VE	MTZ40-1VI	MTZ40JH3*VE	MTZ40-3VI	MTZ40JH4*VE	MTZ40-4VI
30110	24323	24323		1 ¾ × 1 ¼	¾ × ¾	2	82	MTZ44HJ1*VE	MTZ44-1VI	MTZ44HJ3*VE	MTZ44-3VI	MTZ44HJ4*VE	MTZ44-4VI
34538	28590	28590		1 ¾ × 1 ¼	¾ × ¾	2	82	MTZ50HK1*VE	MTZ50-1VI	MTZ50HK3*VE	MTZ50-3VI	MTZ50HK4*VE	MTZ50-4VI
38881	32451	32451		1 ¾ × 1 ¼	¾ × ¾	2	86					MTZ56HL4*VE	MTZ56-4VI
44404	36056	36056		1 ¾ × 1 ¼	¾ × ¾	2	86	MTZ64HM1*VE	MTZ64-1VI	MTZ64HM3*VE	MTZ64-3VI	MTZ64HM4*VE	MTZ64-4VI
50000	40894	40894		1 ¾ × 1 ¼	¾ × ¾	2	88			MTZ72HN3*VE	MTZ72-3VI	MTZ72HN4*VE	MTZ72-4VI
56336	46521	46521		1 ¾ × 1 ¼	1 ½ × ¾	2	88			MTZ80HP3*VE	MTZ80-3VI	MTZ80HP4*VE	MTZ80-4VI
63963	52953	52953		1 ¾ × 1 ¼	1 ½ × ¾	4	132			MTZ100HS3*VE	MTZ100-3VI	MTZ100HS4*VE	MTZ100-4VI
78906	68297	68297		1 ¾ × 1 ¼	1 ½ × ¾	4	141			MTZ125HU3*VE	MTZ125-3VI	MTZ125HU4*VE	MTZ125-4VI
96936	80472	80472		1 ¾ × 1 ¼	1 ½ × ¾	4	148			MTZ144HV3*VE	MTZ144-3VI	MTZ144HV4*VE	MTZ144-4VI
107631	87421	87421		1 ¾ × 1 ¼	1 ½ × ¾	4	152			MTZ160HW3*VE	MTZ160-3VI	MTZ160HW4*VE	MTZ160-4VI

¹ These compressor models have threaded sight glass and ¾ in. flare oil equalization line.

² To determine the nominal capacity for R-407A/C/F, R-452A, R-448A, R-449A, check Coolselector.

³ Evaporator temperature = 45 °F, condensing temperature = 130 °F, superheat = 20 °F, subcooling = 15 °F

⁴ Evaporator temperature = 20 °F, condensing temperature = 120 °F, superheat = 20 °F, subcooling = 0 °F


⁵ Actual connection for MT and MTZ 22–28 (208–230/1/60) is rotolock 1 ¼ in. × 1 in. and connection with supplied sleeve is ¾ in. × ½ in. ODF.
Capacitor values and relays for 1 phase compressors are available on page 80.

Spare Parts and Accessories


Description	Type(s) applied to	Danfoss Code No.
Belt type crankcase heater; 54W, 230V	MT(Z) 018–040	7773106
Belt type crankcase heater; 65W, 110V	MT(Z) 044–081	7773109
Belt type crankcase heater; 65W, 230V		7773107
Belt type crankcase heater; 65W, 400V		7773117
Belt type crankcase heater; 65W, 460V		120Z0466
Belt type crankcase heater; 75W, 110V	MT(Z) 100–160	7773110
Belt type crankcase heater; 75W, 230V		7773108
Belt type crankcase heater; 75W, 400V		7773118
Belt type crankcase heater; 75W, 460V		120Z0464
PTC heater	all	120Z0459
Mounting kit 1 cyl high	MT(Z) 22–28 for 208–230/1/60; 32–40 for 200–230/3/60 and 460/3/60	8156001
Mounting kit 1 cyl low	MT(Z) 18 for 208–230/1/60; 22–28 for 200–230/3/60 and 460/3/60	120Z0760
Mounting kit 2 cyl HP	MT(Z) 80 for 200–230/3/60	120Z0761
Mounting kit 2 cyl except HP	MT(Z) 50–60 for 208–230/1/60	120Z0762
Mounting kit 2 cyl	MT(Z) 44 for 208–230/1/60; 4–72 for 200–230/3/60 and 460/3/60	120Z0763
Mounting kit 2 cyl HP	MT(Z) 80 for 460/3/60	120Z0764
Mounting kit—4 cylinder compressors	MT(Z) 100–160	8156007
Mineral oil, 160P; 2 liter can	all MT	7754001
Mineral oil, 160P; 5 liter can	all MT	7754002
POE lubricant, 160PZ; 1 liter can	all MTZ	120Z0638
Oil sight glass and gasket	all	8156019
Terminal box; include cover and clamp	MT(Z) 18–44 for 208–230/1/60 18–72 for 200–230/3/60 18–80 for 460/3/60	8156134
Terminal box; include cover and clamp	MT(Z) 50–64 for 208–230/1/60 80–160 for 200–230/3/60 100–160 for 460/3/60	8156135
Blue spray paint	all	8154001
Gasket Set; 1 of each size gasket for the MT(Z) line	all—need 2 for: MT(Z) 18 for 208–230 and 460 MT(Z) 22–28 for 208–230/3 and 460	8156009
Rotolock Service Valve Set (no gaskets) Suction and Discharge	MT(Z) 18 for 208–230 and 460 MT(Z) 22–28 for 208–230/3 and 460	7703004
Rotolock Service Valve Set (no gaskets) Suction and Discharge	MT(Z) 22–40 for 208–230/1 MT(Z) 32–40 for 208–230/3 and 460	7703005
Rotolock Service Valve Set (no gaskets) Suction and Discharge	MT(Z) 44–64 for 208–230/1 MT(Z) 44–72 for 208–230/3 and 460	7703006
Rotolock Service Valve Set (no gaskets) Suction and Discharge	MT(Z) 80–160 for 208–230/3 and 460	7703009
Solder Sleeve P02 (1 ¼ in. rotolock, 1 ½ in. ODF)	Suction: MT(Z) 80–160 for 208–230/3 and 460	8153004
Solder Sleeve P06 (1 in. rotolock, ½ in. ODF)	Suction: MT(Z) 18 for 208–230/1 MT(Z) 18–28 for 208–230/3 and 460 Discharge: MT(Z) 22–40 for 208–230/1 MT(Z) 32–40 for 208–230/3 and 460	8153007
Solder Sleeve P04 (1 ¼ in. rotolock, ¾ in. ODF)	Discharge: MT(Z) 44–64 for 208–230/1 MT(Z) 44–160 for 208–230/3 and 460	8153008
Solder Sleeve P01 (1 in. rotolock, ⅝ in. ODF)	Discharge: MT(Z) 18 for 208–230/1 MT(Z) 18–28 for 208–230/3 and 460	8153010
Solder Sleeve P09 (1 ¼ in. rotolock, ⅝ in. ODF)	Suction: MT(Z) 22–40 for 208–230/1 MT(Z) 32–40 for 208–230/3 and 460	8153011
Solder Sleeve P02 (1 ¾ in. rotolock, ⅞ in. ODF)	Suction: MT(Z) 44–64 for 208–230/1 MT(Z) 44–72 for 208–230/3 and 460	8153013
Rotolock Nut, 1 in.	Suction: MT(Z) 18 for 208–230/1 MT(Z) 18–28 for 208–230/3 and 460 Discharge: MT(Z) 18–40 for 208–230/1 MT(Z) 18–40 for 208–230/3 and 460	8153122
Rotolock Nut, 1 ¼ in.	Suction: MT(Z) 22–40 for 208–230/1 MT(Z) 32–40 for 208–230/3 and 460 Discharge: MT(Z) 44–64 for 208–230/1 MT(Z) 44–160 for 208–230/3 and 460	8153123
Rotolock Nut, 1 ¾ in.	Suction: MT(Z) 44–64 for 208–230/1 MT(Z) 44–160 for 208–230/3 and 460	8153124

NTZ - Low Temperature Reciprocating Compressors

The Maneurop® NTZ series of reciprocating compressors from Danfoss Commercial Compressors are designed for low evaporating temperature applications with refrigerants R-404A, R-452A, and R-507A. The NTZ series is optimized at -30 °F with an extended evaporating temperature range from -50 °F to +15 °F. NTZ compressors have a large internal free volume that protects against the risk of liquid hammering when liquid refrigerant enters the compressor.

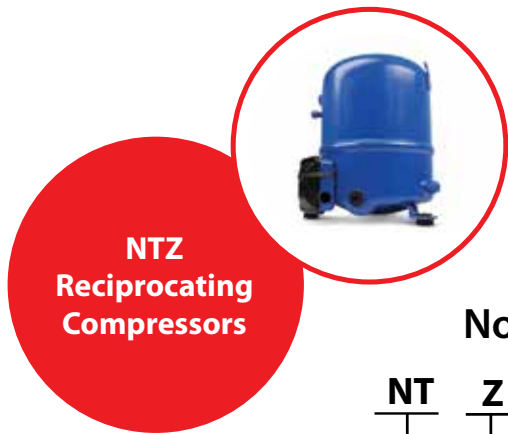

Nomenclature / Model No.

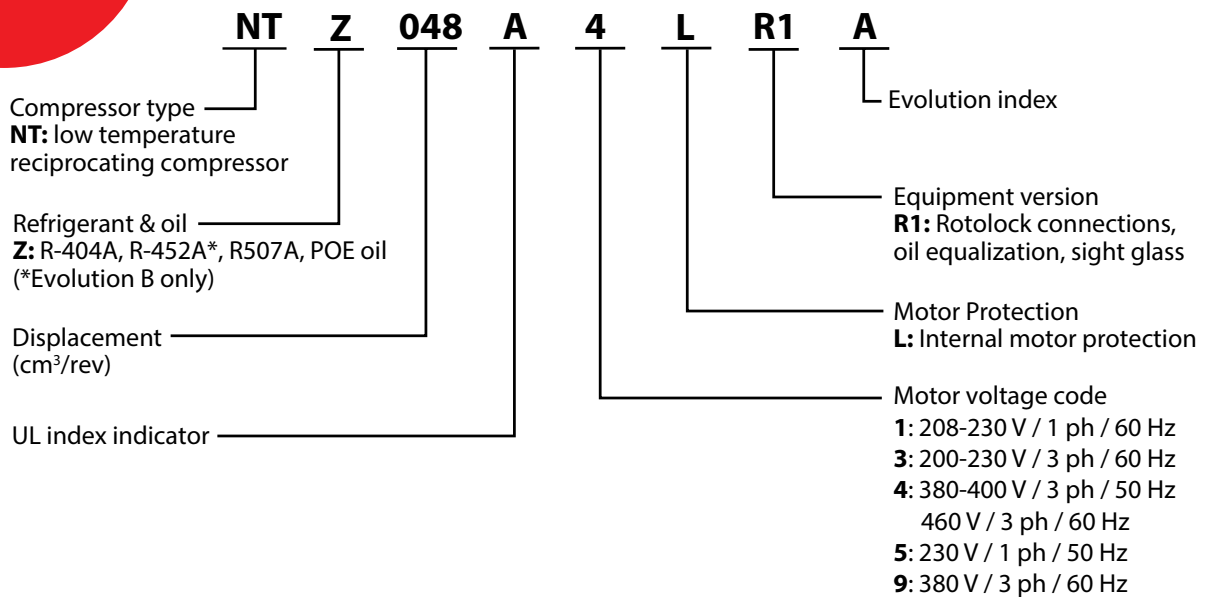

Technical data and ordering

NTZ - Low Temperature Reciprocating Compressors

Connection type Rotolock (in.)	Connection with supplied sleeve (in. ODF)	No. of cylinders	Weight (lbs.)	208-230/1/60			200-230/3/60			460/3/60		
				Danfoss Model No.	Nominal capacity¹ (Btu/h)	Danfoss Code No.²	Danfoss Model No.	Nominal capacity¹ (Btu/h)	Danfoss Code No.²	Danfoss Model No.	Nominal capacity¹ (Btu/h)	Danfoss Code No.²
1 ¼ × 1	¾ × ½	1	46	NTZ048A1LR1B	4547	120F0293	NTZ048A3LR1B	4490	120F0279	NTZ048A4LR1B	4490	120F0226
1 ¼ × 1	¾ × ½	1	51	NTZ068A1LR1B	6649	120F0294	NTZ068A3LR1B	7518	120F0280	NTZ068A4LR1B	7518	120F0230
1 ¾ × 1 ¼	¾ × ¾	2	77	NTZ096A1LR1B	9155	120F0295	NTZ096A3LR1B	9110	120F0281	NTZ096A4LR1B	9110	120F0234
1 ¾ × 1 ¼	¾ × ¾	2	77	NTZ108A1LR1B	10805	120F0296	NTZ108A3LR1B	10536	120F0282	NTZ108A4LR1B	10536	120F0238
1 ¾ × 1 ¼	1 ½ × ¾	2	77	NTZ136A1LR1B	10805	120F0297	NTZ136A3LR1B	13901	120F0283	NTZ136A4LR1B	13901	120F0236
1 ¾ × 1 ¼	1 ½ × ¾	4	137				NTZ215A3LR1B	21461	120F0284	NTZ215A4LR1B	21461	120F0240
1 ¾ × 1 ¼	1 ½ × ¾	4	141				NTZ271A3LR1B	29788	120F0285	NTZ271A4LR1B	29788	120F0242

¹ Evaporating temperature = -25 °F, condensing temperature = 105 °F, superheat = 20 °F, subcooling = 0 °F.

² Single compressor, threaded sight glass, ¾ in. oil equalization connection.

Capacitor values and relays for 1 phase compressors are available on page 80.

Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Belt type crankcase heater; 54W, 230V	NTZ04-068	7773106
Belt type crankcase heater; 65W, 110V	NTZ096-136	7773109
Belt type crankcase heater; 65W, 230V		7773107
Belt type crankcase heater; 65W, 400V		7773117
Belt type crankcase heater; 65W, 460V		120Z0466
Belt type crankcase heater; 75W, 110V		7773110
Belt type crankcase heater; 75W, 230V	NTZ215-271	7773108
Belt type crankcase heater; 75W, 400V		7773118
Belt type crankcase heater; 75W, 460V		120Z0464
PTC heater	all	120Z0459
Mounting kit 1 cyl high	NTZ048-68	8156001
Mounting kit 2 cyl HP	NTZ136 for 208-230/1/60	120Z0761
Mounting kit 2 cyl	NT096-108	120Z0763
Mounting kit 2 cyl HP	NTZ136 for 200-230/1/60 and 460/3/60	120Z0764
Mounting kit—4 cylinder compressors	NTZ215-271	8156007
Oil sight glass and gasket	all	8156019
Terminal box; include cover and clamp	NTZ048-136 (except 136-1)	8156134
Terminal box; include cover and clamp	NTZ136-1, NTZ215-271	8156135
Blue spray paint	all	8154001
Rotolock Service Valve Set (no gaskets) Suction and Discharge	NTZ048-068	7703005
Rotolock Service Valve Set (no gaskets) Suction and Discharge	NTZ096-108	7703006
Rotolock Service Valve Set (no gaskets) Suction and Discharge	NTZ136-271	7703009
Solder Sleeve P02 (1 ¼ in. rotolock, 1 ½ in. ODF)	all	8153004
Solder Sleeve P06 (1 in. rotolock, ½ in. ODF)	Discharge: all	8153007
Solder Sleeve P04 (1 ¼ in. rotolock, ¾ in. ODF)	Discharge: all	8153008
Solder Sleeve P01 (1 in. rotolock, ¾ in. ODF)	Discharge: all	8153010
Solder Sleeve P09 (1 ¼ in. rotolock, ¾ in. ODF)	Suction: all	8153011
Solder Sleeve P02 (1 ¾ in. rotolock, 7/8 in. ODF)	Suction:all	8153013
Rotolock Nut, 1 in.	Discharge: all	8153122
Rotolock Nut, 1 ¼ in.	Discharge: all	8153123
Rotolock Nut, 1 ¾ in.	Suction: all	8153124


H Series - Residential and Light Commercial Scroll Compressors


Danfoss Residential and Light Commercial Air Conditioning Scroll Compressors install quickly and easily and feature a design that minimizes internal parts, decreasing the overall weight and significantly reducing noise during operation. With a bolt pattern and liquid and suction line connections that line up with those of other major scroll compressor manufacturers, Danfoss scroll compressors can be used to replace compressors made by nearly any company.

H Series Scroll Compressors



Nomenclature / Model No.

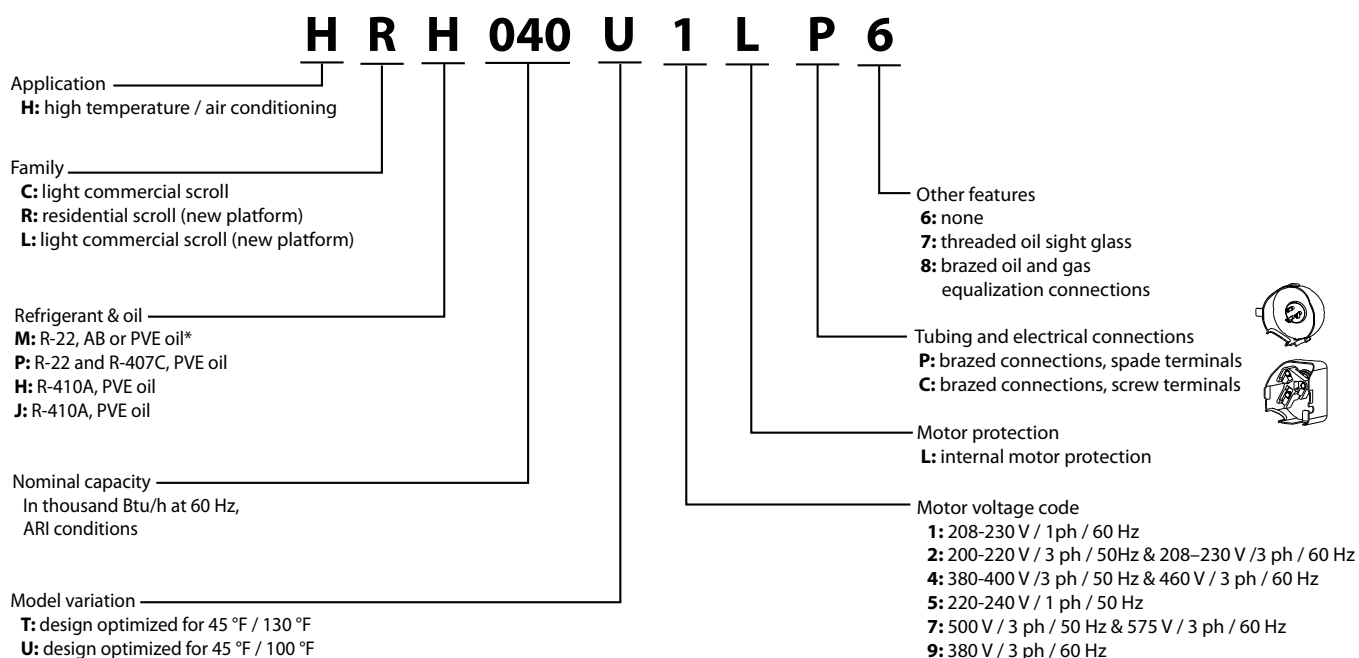



Technical data and ordering

H Series - Residential and Light Commercial Scroll Compressors (R-22/R-407C)


Refrigerant	Voltage/Phase/ Frequency	Tons (approx.)	Competitor Model No.	Solder ODF connection (in.)	Weight (lbs.)	OLD Danfoss Model	NEW Danfoss Model	
							Danfoss Model No.	Danfoss Code No.
R-22	1: 200-230V/1/60Hz	2	ZR25K-PFV	$\frac{3}{4} \times \frac{1}{2}$	73	HRM025T1LP6	HRP025TL1P6	121L3086
		2 ½	ZR28K*-PFV ZR32K*-PFV	$\frac{3}{4} \times \frac{1}{2}$	75	HRM032U1LP6	HRP032U1LP6	121L3345
		3	ZR34K*-PFV ZR36K*-PFV	$\frac{3}{4} \times \frac{1}{2}$	75	HRM038U1LP6	HRP038U1LP6	121L3353
		3 ½	ZR40K*-PFV ZR42K*-PFV	$\frac{3}{4} \times \frac{1}{2}$	75	HRM040U1LP6 HRM042U1LP6	HRP042T1LP6	121L3094
		4	ZR47K*-PFV	$\frac{7}{8} \times \frac{1}{2}$	77	HRM047U1LP6	HRP047U1LP6	121L3347
		4 ½	ZR54K*-TF5	$\frac{7}{8} \times \frac{1}{2}$	97	HRM054U1LP6	HRM054U1LP6	121L3349
		5	ZR57K*-PFV ZR61K*-PFV	$\frac{7}{8} \times \frac{1}{2}$	97	HRM060U1LP6	HRP060T1LP6	121L3070
	2: 200-220V/3/50Hz & 208-230V/3/60Hz	3 ½	ZR42K*-TF5	$\frac{3}{4} \times \frac{1}{2}$	75	HRM042U2LP6	HRP042U2LP6	121L1106
		4	ZR47K*-TF5	$\frac{7}{8} \times \frac{1}{2}$	71	HRM047U2LP6	HRP047T2LP6	121L1126
		4 ½	ZR54K*-TF5	$\frac{7}{8} \times \frac{1}{2}$	93	HRM054U2LP6	HRP054U2LP6	121L3351
		5	ZR57K*-TF5 ZR61K*-TF5	$\frac{7}{8} \times \frac{1}{2}$	93	HRM060U2LP6	HRP060T2LP6	121L2297
		5 ½		$\frac{7}{8} \times \frac{1}{2}$	85		HLP068T2LC6	121L3276
		6	ZR72K*-TF5	$\frac{7}{8} \times \frac{1}{2}$	95	HLM072T2LC6 HLM075T2LC6	HLP075T2LC6	121L3098
		7	ZR81KC-TF5	$\frac{7}{8} \times \frac{3}{4}$	91	HLM081T2LC6	HLP081T2LC6	121L1916
		8	ZR94KC-TF5	$1 \frac{1}{8} \times \frac{7}{8}$	108	HCM094T2LC6	HCP094T2LC6	121L0906
		10	ZR125KC-TF5 ZR12M3*-TWC	$1 \frac{1}{8} \times \frac{7}{8}$	106	HCM120T2LC6	HCP120T2LC6	121L0766
		4	ZR47K*-TFD	$\frac{7}{8} \times \frac{1}{2}$	82	HRM047U4LP6	HRP047T4LP6	121L1046
	4: 380-415V/3/50Hz & 460V/3/60Hz	4 ½	ZR54K*-TFD	$\frac{7}{8} \times \frac{1}{2}$	89	HRM054U4LP6	HRP054T4LP6	121L1691
		5	ZR57K*-TFD ZR61K*-TFD	$\frac{7}{8} \times \frac{1}{2}$	88	HRM058U4LP6 HRM060U4LP6	HRP060T4LP6	121L1726
		5 ½		$\frac{7}{8} \times \frac{1}{2}$	86		HLP068T4LC6	121L2014
		6	ZR72K*-TFD	$\frac{7}{8} \times \frac{1}{2}$	58	HLM072T4LC6 HLM075T4LC6	HLP075T4LC6	121L1766
		7	ZR81KC-TFD	$\frac{7}{8} \times \frac{3}{4}$	94	HLM078T4LC6 HLM081T4LC6	HLP081T4LC6	121L1781
		8	ZR94KC-TFD	$1 \frac{1}{8} \times \frac{7}{8}$	101	HCM094T4LC6	HCP094T4LC6	121L0601
		9	ZR108KC-TFD ZR11M3-TWD	$1 \frac{1}{8} \times \frac{7}{8}$	108	HCM109T4LC6	HCP109T4LC6	121L0376
		10	ZR12M3-TWD	$1 \frac{1}{8} \times \frac{7}{8}$	109	HCM120T4LC6	HCP120T4LC6	121L0401

Additional models may be available upon request.

Full range of models (refrigerants, tons, and voltage codes) available. Check Coolselector or visit our Online Datasheet Generator at www.danfoss.com/odsg. Capacitor values and relays for 1 phase compressors are available on page 80.



Scan the QR code for the Danfoss Bulletin R-22 Compressors Replacements and HFC Retrofits or visit <http://bit.ly/DanfossR22CompressorsReplacementBulletin>



Technical data and ordering

H Series - Residential and Light Commercial Scroll Compressors (R-410A)

Refrigerant	Motor Voltage	Tons (approx.)	Competitor Model No.	Solder ODF connection (in.)	Weight (lbs.)	OLD Danfoss Model	NEW Danfoss Model	
							Danfoss Model No.	Danfoss Code No.
R-410A	1: 200–230V/1/60Hz	2 ½	ZP29K*E-PFV ZP31K*E-PFV ZP32K*E-PFV	¾ × ½	70	HRH032U1LP6	HRH032U1LP6	121L1141
		3	ZP36K*E-PFV	¾ × ½	94	HRH038U1LP6	HRH036U1LP6	121L1156
		3 ¼	ZP41K*E-PFV	7⁄8 × ½	73	HRH040U1LP6	HRH040U1LP6	121L1161
		3 ¾	ZP44K*E-PFV	7⁄8 × ½	99		HRH044U1LP6	121L1286
		4	ZP49K*E-PFV	7⁄8 × ½	79	HRH048U1LP6	HRH048U1LP6	121L2582
		4 ½	ZP51K*E-PFV	7⁄8 × ½	82		HRH051U1LP6	121L1296
	2: 200–220/3/50Hz & 208–230V/3/60Hz	5	ZP61K*E-PFV	7⁄8 × ½	90	HLH061T1LP6	HLH061T1LP6	121L2042
		3 ¼	ZP36K*E-TF5 ZP38K*E-TF5 ZP41K*E-TF5	7⁄8 × ½	77	HRH040U2LP6	HRH040U2LP6	121L1276
		3 ¾	ZP44K*E-TF5	7⁄8 × ½	89		HRH044U2LP6	121L1456
		4	ZP51K*E-TF5	7⁄8 × ½	85		HRH051U2LP6	121L1466
		5		7⁄8 × ½	90	HLH061T2LC6	HLH061T2LC6	121L2062
		5 ½	ZP67KCE-TF5	7⁄8 × ½	89	HLH068T2LC6	HLH068T2LC6	121L1481
		6	ZP72KCE-TF5	7⁄8 × ½	96	HLJ072T2LC6	HLJ072T2LC6	121L1486
		7	ZP83KCE-TF5	7⁄8 × ½	96	HLJ083T2LC6	HLJ083T2LC6	121L1491
		7 ½	ZP90KCE-TF5	1 ⅛ × 7⁄8	102	HCJ090T2LC6	DCJ091T2LC6	121L5003
		8 ½	ZP103KCE-TF5	1 ⅛ × 7⁄8	104	HCJ105T2LC6	DCJ106T2LC6	121L5011
	4: 380–415V/3/50Hz & 460V/3/60Hz	10	ZP120KCE-TF5	1 ⅛ × 7⁄8	106	HCJ120T2LC6	DCJ121T2LC6	121L5019
		3 ¼	ZP36K*E-TFD ZP38K*E-TFD ZP41K*E-TFD	7⁄8 × ½	77	HRH036U4LP6 HRH038U4LP6 HRH040U4LP6	HRH040U4LP6	121L1211
		3 ¾	ZP44K*E-TFD	7⁄8 × ½	77		HRH044U4LP6	121L1361
		4	ZP51K*E-TFD	7⁄8 × ½	87		HRH051U4LP6	121L1371
		5	ZP61KCE-TFD	7⁄8 × ½	96	HLH061T4LC6	HLH061T4LC6	121L2052
		5 ½	ZP67KCE-TFD	7⁄8 × ½	96	HLH068T4LC6	HLH068T4LC6	121L1391
		6	ZP72KCE-TFD	7⁄8 × ½	97	HLJ072T4LC6	HLH072T4LC6	121L1396
		7	ZP83KCE-TFD	7⁄8 × ½	93	HLJ083T4LC6	HLJ083T4LC6	121L1401
		7 ½	ZP90K*E-TFD	1 ⅛ × 7⁄8	109	HCJ090T4LC6	DCJ091T4LC6	121L5001
		8 ½	ZP104KCE-TFD	1 ⅛ × 7⁄8	109	HCJ105T4LC6	DCJ106T4LC6	121L5009
		10	ZP120K*E-TFD	1 ⅛ × 7⁄8	164	HCJ120T4LC6	DCJ121T4LC6	121L5017

Additional models may be available upon request.

Full range of models (refrigerants, tons, and voltage codes) available. Check Coolselector or visit our Online Datasheet Generator at www.danfoss.com/odsg.

Capacitor values and relays for 1 phase compressors are available on page 80.

Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Terminal cover, spade terminals (round)		120Z5015
Terminal cover, screw terminals (square)	all	120Z5018
Mounting kit for 1 compressor: 4 grommets, 4 sleeves, 4 bolts, 4 washers		120Z5064
PVE lubricant, 210HV (FVC68D); 1 liter can	all	120Z5034
Wire harness; 5 feet, for 200–230V scroll compressor	models with spade terminals	120Z5056
Wire harness; 5 feet, for 380–575V scroll compressor	models with spade terminals	120Z5057
Belt type crankcase heater: 40W, 230V	HRM032-047, HRH031-040	120Z0055
Belt type crankcase heater: 40W, 400V		120Z0056
Belt type crankcase heater: 50W, 230V	HRM048-060, HLM068-075, HRM044-056, HLH061-068, HLJ072-075	120Z0057
Belt type crankcase heater: 50W, 400V		120Z0058
Belt type crankcase heater: 65W, 230V		120Z0059
Belt type crankcase heater: 65W, 400V	HLM078-081, HCM094-120, HLJ083, HCJ090-120	120Z0060
Belt type crankcase heater: 70W, 230V		120Z5040
Belt type crankcase heater: 70W, 400/440V		120Z5041

S Series - Light Commercial and Commercial Scroll Compressors

Danfoss Performer® Universal Scroll Compressors are designed to serve as quick, easy replacements for most commercial air conditioning scroll compressors. These compressors come with a bolt pattern, suction and discharge lines, and performance characteristics that match up directly with some competitors' products.

S Series Scroll Compressors



Nomenclature / Model No.

SM 115 S 4 Q C
DSH 090 A 4 AL C

Refrigerant & oil

SM: R-22, mineral oil

SY: R-22, R-407C, R-134a, POE oil

SZ: R-407C, R-134a, R-404A / R-507A, POE oil

DSH: R-410A, POE oil

Nominal Capacity

In thousand Btu/h at 60 Hz, ARI Conditions

UL index

Motor voltage code

3: 200-230 V / 3 ph / 60 Hz

4: 380-400 V / 3 ph / 50 Hz & 460 V / 3 ph / 60 Hz

6: 230 V / 3 ph / 50 Hz


7: 500 V / 3 ph / 50 Hz & 575 V / 3 ph / 60 Hz

9: 380 V / 3 ph / 60 Hz

Evolution index

Version (for SM, SY, SZ)	Motor protection module	Connection	Module voltage	Applies to
V	Internal overload protector	brazed		084, 090, 100, 110, 120, 148, 161
A		brazed		112, 124, 147
C	Internal thermostat	brazed		115, 125, 160, 175, 185
Q		brazed		
R		rotolock		
P	Electronic protection module	brazed	24V AC	
X		brazed	230V	
S		rotolock	24V AC	
Y		rotolock	230V	
CA		brazed	24V AC	
CB		brazed	115/230V	
PA		rotolock	24V AC	
PB		rotolock	115/230V	
AC	contact OEM			

Version (for SH)	Motor protection module	Connection	Module voltage	Applies to
AL	Internal overload protector	brazed		090, 105, 120, 140, 161, 175, 184
AA	Electronic protection module	brazed	24V AC	240, 295, 300, 380, 485
AB		brazed	115/230V	
AB		brazed	230V	180
AC	contact OEM			



Scan the QR code for the Danfoss Bulletin R-22 Compressors Replacements and HFC Retrofits or visit
<http://bit.ly/DanfossR22CompressorsReplacementBulletin>



Technical data and ordering

S Series - Scroll Compressors

Nominal tonnage	Voltage/Phase/Frequency	Competitor Part Nos. ¹		Net weight (lbs.)	Connection size/type (suction x discharge)	Solder sleeve adapter set for Rotolock connectors	R-22		R-407C	
							Danfoss Model No.	Danfoss Code No. ²	Danfoss Model No.	Danfoss Code No. ²
7 ½	200-230/3/60		ZR94KC-TF5	143	1 ¾ x ¾ Braze	7765005	SM090S3VC	SM090-3VI	SZ090S3VC	SZ090-3VI
	460/3/60 400/3/50		ZR94KC-TFD				SM090S4VC	SM090-4VI	SZ090S4VC	SZ090-4VI
9 ½	200-230/3/60	CSHA-093R-0*00 or 0A	ZR108KC-TF5 ZR11M3-TWC	172	1 ¾ x ¾ Braze	120Z0405	SM115S3QC	SM115-3QAI	SZ115S3QC	SZ115-3QAI
	460/3/60 400/3/50	CSHA-093K-0*00 or 0A	ZR108KC-TFD ZR11M3-TWD				SM115S4QC	SM115-4QAI	SZ115S4QC	SZ115-4QAI
10	200-230/3/60	CSHA-100R-0*00 or 0A	ZR125KC-TF5 ZR12M3-TWC	172	1 ¾ x ¾ Braze	120Z0405	SM125S3QC	SM125-3QAI	SZ125S3QC	SZ125-3QAI
	460/3/60 400/3/50	CSHA-100K-0*00 or 0A	ZR125KC-TFD ZR12M3-TWD				SM125S4QC	SM125-4QAI	SZ125S4QC	SZ125-4QAI
12 ½	200-230/3/60	CSHA-125R-0*00 or 0A	ZR16M3-TWC	198	1 ¾ x ¾ Braze	120Z0405	SM160T3CC	SM160-3CBI	SZ160T3CC	SZ160-3CBI
	460/3/60 400/3/50	CSHA-125K-0*00 or 0A	ZR16M3-TWD				SM160T4CC	SM160-4CBI	SZ160T4CC	SZ160-4CBI
14	200-230/3/60	CSHA-140R-0*00 or 0A		220	1 ¾ x 1 ¾ Braze	7765028	SM175S3QC	SM175-3QAI	SZ175S3QC	SZ175-3QAI
	460/3/60 400/3/50	CSHA-140K-0*00 or 0A					SM175S4QC	SM175-4QAI	SZ175S4QC	SZ175-4QAI
15	200-230/3/60	CSHA-150R-0*00 or 0A	ZR190KC-TW5 ZR19M3-TWC	220	1 ¾ x 1 ¾ Braze	7765028	SM185S3QC	SM185-3QAI	SZ185S3QC	SZ185-3QAI
	460/3/60 400/3/50	CSHA-150K-0*00 or 0A	ZR190KC-TWD ZR19M3-TWD				SM185S4QC	SM185-4QAI	SZ185S4QC	SZ185-4QAI

¹ Competitor Model Nos. beginning "ZR" may have different footprint, suction, discharge or height compared to Danfoss Model No.

² Code Nos. ending "QAI" include threaded sight glass, ¾ in. flare SAE oil equalization connection, brazed suction and discharge connections and mounting bracket.

Code Nos. ending "VI" and "CBI" have threaded sight glass, ¾ in. flare SAE oil equalization connection and brazed suction and discharge connections. Use compressor beginning with SM when system will use R-22; use compressor beginning with SZ when retrofitting system to R-407C. For additional information, see Danfoss Literature No. DKRCC.PE.000.H1.02 (<http://bit.ly/RefrigerantRetrofits>)

Full range of models (refrigerants, tons, and voltage codes) available. Check Coolselector or visit our Online Datasheet Generator at www.danfoss.com/odsg.

Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Solder sleeve adapter set (1 ¾ in. rotolock, 1 ½ in. ODF), (1 ¼ in. rotolock, ¾ in. ODF)	SH090	120Z0125
Solder sleeve adapter set (1 ¾ in. rotolock, 1 ¾ in. ODF), (1 ¼ in. rotolock, ¾ in. ODF) *diameter restrictor	SM115, 125, 160, DSH105, 120, 140, 161, 184	7765006
Solder sleeve adapter set (1 ¾ in. rotolock, 1 ¾ in. ODF), (1 ¼ in. rotolock, ¾ in. ODF)	SM115, 125, SZ115, 125, DSH105, 120, 140, 161, 184	120Z0405
Solder sleeve adapter set (2 ¾ in. rotolock, 1 ¾ in. ODF), (1 ¾ in. rotolock, ¾ in. ODF)	SM160, 175, 185, SZ160, 175, 185, DSH240, 295, 380, 381	7765028
Motor protection module, 24V AC	SM115, 125, 160, 185	120Z0584
Electrical module 115/230V	DSH 240, 295, 380	120Z0585
Belt type crankcase heater; 65W, 460V	SM115, 125, 160, DSH090, 105, 120, 140, 161, 175, 184	120Z0466
Belt type crankcase heater; 65W, 110V		7773109
Belt type crankcase heater; 65W, 230V		7773107
Belt type crankcase heater; 65W, 400V		7773117
Belt type crankcase heater; 65W, 400V		120Z0039
Belt type crankcase heater; 75W, 110V		7773110
Belt type crankcase heater, 75W, 230V	SM175, 185, DSH240, 295	7773108
Belt type crankcase heater, 75W, 400V		7773118
Belt type crankcase heater, 75W, 460V		120Z0464
Belt type crankcase heater, 130W, 110V	DSH380	7773121
Belt type crankcase heater, 130W, 230V		7773122
Belt type crankcase heater, 130W, 400V		7773123
Service kit for terminal box; includes cover, clamp, terminal block connector	DSH090, 105, 120, 140, 161	8156135
Terminal box, including cover	SM115, 125, 160, 175, 185	8156139
Terminal box cover	DSH140-3, 161-3, 184, 175	120Z0413
Terminal box, including cover	DSH240, 295, 380	120Z0458
Oil sight glass with gaskets	SM090, 115, 125, 160, 175, 185	8156019
Mounting kit for 1 compressor: 4 grommets, 4 sleeves, 4 bolts, 4 washers	SM115-185	8156138
Mounting kit for 1 compressor: 4 grommets, 4 sleeves, 4 bolts, 4 washers	DSH090, 105, 120, 140, 161, 175, 184	120Z0066
Mounting kit for 1 compressor: 4 rigid grommets, 4 sleeves, 4 bolts, 4 washers	DSH240, 295, 380	7777045
Mineral oil, 160P; 2 liter can	all SM, SZ	7754001
Mineral oil, 160P; 5 liter can	all SM, SZ	7754002
Blue spray paint	all	8154001
Oil equalization adaptor. To connect ¾ in. tube on 22mm oil sight glass connection; includes (1) 22mm to ¾ in., (2) gaskets.	all SM, SZ, DSH	120Z0164
Oil equalization adaptor. To connect ½ in. tube on 22mm oil sight glass connection; includes (1) 22mm to ½ in., (2) gaskets.	all SM, SZ, DSH	120Z0165
Oil equalization adaptor kit for trio mounting; oil fittings, gasket and adaptors (copper pipes not included)	SM 160, 185	7773112

DSH Series - Light Commercial and Commercial Scroll Compressors with Intermediate Discharge Valves

Refrigerant	Nominal tonnage	Voltage/phase/frequency	Competitor model no. ¹		Motor protection	Net weight (lbs.)	Solder ODF connection (in.)	Solder sleeve adaptor set to Rotolock connections	OLD Danfoss Model No.	OLD Danfoss Code No. ²	NEW Danfoss Model No. ³	NEW Danfoss Code No. ²		
R-410A	7 ½	200–230/3/60	CCSHD-089J CSHD-092J	ZP90KCE-TF5 ZP91KCE-TF5	Internal Overload Protector	128	1 ½ × ¾	120Z0125	SH090A3AL*	120H0001	DSH090A3AL*	120H1180		
		460/3/60	CSHD-089K CSHD-092K	ZP90KCE-TFD					SH090A4AL*	120H0003	DSH090A4AL*	120H1182		
	8 ¾	200–230/3/60	CSHD-105J	ZP103KCE-TF5		141	1 ¾ × ¾	120Z0405	SH105A3AL*	120H0209	DSH105A3AL*	120H1188		
		460/3/60	CSHD-105K	ZP103KCE-TFD					SH105A4AL*	120H0211	DSH105A4AL*	120H1190		
	10	200–230/3/60	CSHD-125J	ZP120KCE-TF5					SH120A3AL*	120H0011	DSH120A3AL*	120H1196		
		460/3/60	CSHD-125K	ZP120KCE-TFD					SH120A4AL*	120H0013	DSH120A4AL*	120H1198		
	11 ½	200–230/3/60	CSHD-142J	ZP137KCE-TF5		148			SH140A3AL* 120H0199 DSH140A3AL* 120H1204 SH140A4AL* 120H0201 DSH140A4AL* 120H1206 SH161A3AL* 120H0021 DSH161A3AL* 120H1212 SH161A4AL* 120H0023 DSH161A4AL* 120H1214 SH184A3AL* 120H0359 DSH184A3AL* 120H1220 SH184A4AL* 120H0361 DSH184A4AL* 120H1222	SH140A3AL*	120H0199	DSH140A3AL*	120H1204	
		460/3/60	CSHD-142K	ZP137KCE-TFD						SH140A4AL*	120H0201	DSH140A4AL*	120H1206	
	13 ½	200–230/3/60	CSHD-161J	ZP154KCE-TF5		152				SH161A3AL*	120H0021	DSH161A3AL*	120H1212	
		460/3/60	CSHD-161K	ZP154KCE-TFD						SH161A4AL*	120H0023	DSH161A4AL*	120H1214	
	15	200–230/3/60	CSHD-183J	ZP182KCE-TF5		158				SH184A3AL*	120H0359	DSH184A3AL*	120H1220	
		460/3/60	CSHD-183K	ZP182KCE-TFD						SH184A4AL*	120H0361	DSH184A4AL*	120H1222	
	20	200–230/3/60	CSHN-176J	ZP236KCE-TW5 ²	24V AC 115/230V	251		SH240A3AA*/ DSH240A3AAA SH240A3AB*/ DSH240A3ABA SH240A4AA*/ DSH240A4AAA SH240A4AB*/ DSH240A4ABA SH295A3AA*/ DSH295A3AAA SH295A3AB*/ DSH295A3ABA SH295A4AA*/ DSH295A4AAA SH295A4AB*/ DSH295A4ABA SH380A3AA*/ DSH381A3AAA SH380A3AB*/ DSH381A3ABA SH380A4AA*/ DSH381A4AAA SH380A4AB*/ DSH381A4ABA DSH485A3AAA 120H1105 DSH485A3AB* 120H1460 DSH485A4AAA 120H1319 DSH485A4ABA 120H1317 DSH600A4AA* DSH600A4AB* 120H1380 120H1378		SH240A3AA*/ DSH240A3AAA SH240A3AB*/ DSH240A3ABA	120H0289/ 120H1159 120H0297/ 120H1161	DSH240A3AA* DSH240A3AB*	120H1291 120H1289	
		460/3/60	CSHN-176K	ZP236KCE-TWD ²	24V AC 115/230V					SH240A4AA*/ DSH240A4AAA SH240A4AB*/ DSH240A4ABA	120H0291/ 120H1119 120H0299/ 120H1121	DSH240A4AA* DSH240A4AB*	120H1331 120H1329	
	25	200–230/3/60	CSHN-250J	ZP295KCE-TW5 ²	24V AC 115/230V	258	1 ¾ × 1 ½			7765028	SH295A3AA*/ DSH295A3AAA SH295A3AB*/ DSH295A3ABA	120H0851/ 120H1163 120H0853/ 120H1165	DSH295A3AA* DSH295A3AB*	120H1287 120H1285
		460/3/60	CSHN-250K	ZP295KCE-TWD ²	24V AC 115/230V						SH295A4AA*/ DSH295A4AAA SH295A4AB*/ DSH295A4ABA	120H0825/ 120H1123 120H0827/ 120H1125	DSH295A4AA* DSH295A4AB*	120H1327 120H1325
	30	200–230/3/60	CSHN-315J	ZP385KCE-TW5 ²	24V AC 115/230V	357				SH380A3AA*/ DSH381A3AAA SH380A3AB*/ DSH381A3ABA	120H0151/ 120H1167 120H0152/ 120H1169	DSH381A3AA* DSH381A3AB*	120H1283 120H1281	
		460/3/60	CSHN-315K	ZP385KCE-TWD ²	24V AC 115/230V					SH380A4AA*/ DSH381A4AAA SH380A4AB*/ DSH381A4ABA	120H0253/ 120H1127 120H0255/ 120H1129	DSH381A4AA* DSH381A4AB*	120H1323 120H1321	
	40	200–230/3/60			24V AC 115/230V	388	1 ¾ × 1 ¾		120Z0504	DSH485A3AAA	120H1105	DSH485A3AA* DSH485A3AB*	120H1344 120H1460	
		460/3/60			24V AC 115/230V					DSH485A4AAA DSH485A4ABA	120H1131 120H1133	DSH485A4AA* DSH485A4AB*	120H1319 120H1317	
	50	460/3/60			24V AC 115/230V	474	2 ½ × 1 ¾		N/A			DSH600A4AA* DSH600A4AB*	120H1380 120H1378	

¹ Competitor Model Nos. beginning "ZP" may have different footprint, suction, discharge or height compared to Danfoss Model No.

² Control voltage of external motor protection module must be checked before crossing to Danfoss Model No with 24V ac or 115/230V motor protection module.

³ Intermediate Discharge Valves (IDVs) are mechanical valves that improve the partload efficiency of air conditioning systems. The Danfoss scroll range with IDVs is backwards compatible with existing Danfoss scrolls to reduce complexity and save time during installation.

Full range of models (refrigerant, tons, and voltage codes) available. Check Coolselector or visit our Online Datasheet Generator at www.danfoss.com/odsg.

Visit <http://bit.ly/DSHappguide> for the application guideline.


MLZ - Medium Temperature Scroll Compressors

Danfoss MLZ scroll compressors for medium temperature applications are dedicated to commercial and light commercial refrigeration applications.

MLZ Scroll Compressors



Nomenclature / Model No.

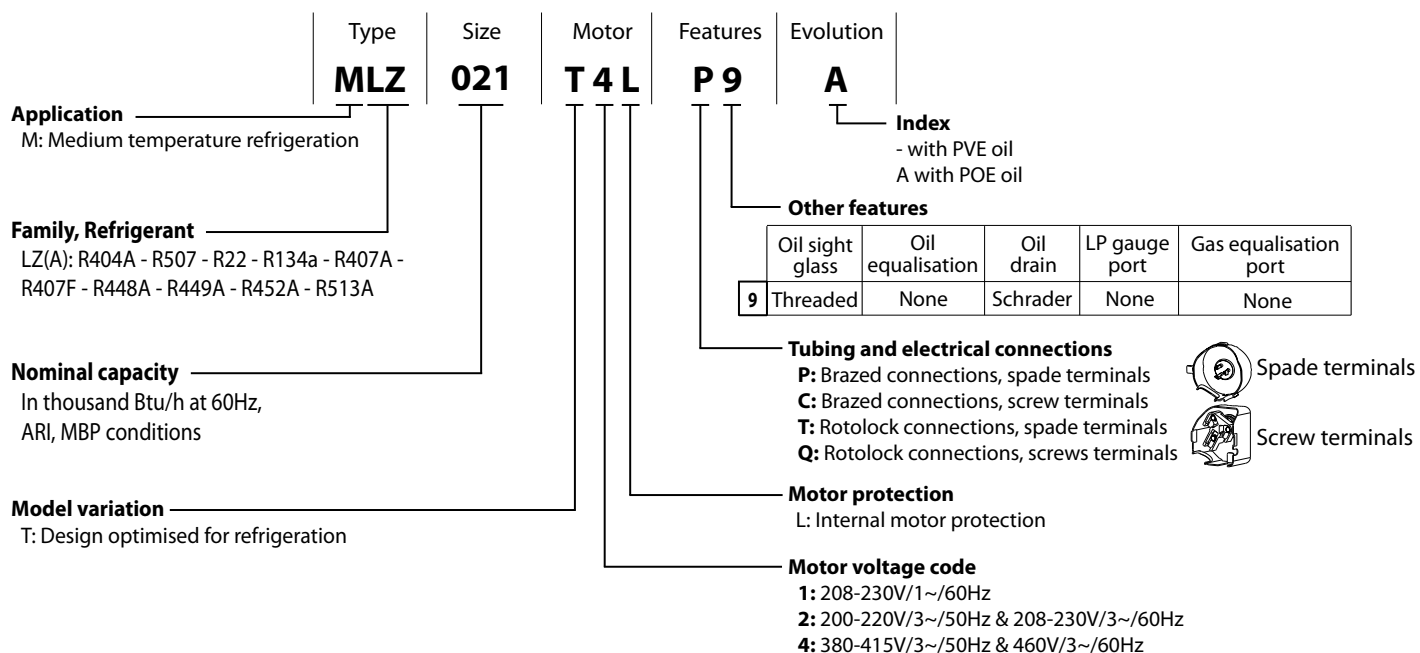

Technical data and ordering

MLZ - Medium Temperature Scroll Compressors

Refrigerant	Voltage/Phase/ Frequency	Tons (approx.)	Nominal capacity (BTU/h)		Connection type Rotolock (in.)	Rotalock connection (in.)	Weight (lbs.)	OLD Danfoss Model	Danfoss Model (brazed)		Danfoss Model (Rotalock)		
			R-404A	R-448A				Danfoss Model No.	Danfoss Model No.	Danfoss Code No.	Danfoss Model No.	Danfoss Code No.	
				R-449A									
R-134a, R-404A, R-448A, R-449A, R-452A	1: 208–230V/1/60Hz	2	13720	13990	$\frac{3}{4} \times \frac{1}{2}$	$1 \frac{1}{4} \times 1$	68	MLZ015T1L*9	MLZ015T1LP9A	121L8659	MLZ015T1LT9A	121L8709	
		2.5	18420	18340				MLZ019T1L*9	MLZ019T1LP9A	121L8717	MLZ019T1LT9A	121L8719	
		3	19720	19510				MLZ021T1L*9	MLZ021T1LP9A	121L8661	MLZ021T1LT9A	121L8737	
		3.5	24420	24390				MLZ026T1L*9	MLZ026T1LP9A	121L8663	MLZ026T1LT9A	121L8751	
		4	28700	29650	$\frac{7}{8} \times \frac{1}{2}$		81	MLZ030T1L*9	MLZ030T1LC9A	121L8665	MLZ030T1LQ9A	121L8763	
		5	34540	34080				MLZ038T1L*9	MLZ038T1LC9A	121L8667	MLZ038T1LQ9A	121L8775	
	2: 200–220/3/50Hz & 208–230V/3/60Hz	2	13720	13900	$\frac{3}{4} \times \frac{1}{2}$		68	MLZ015T2L*9	MLZ015T2LP9A	121L8669	MLZ015T2LT9A	121L8711	
		2.5	18420	18340				MLZ019T2L*9	MLZ019T2LP9A	121L8721	MLZ019T2LT9A	121L8723	
		3	19720	19510				MLZ021T2L*9	MLZ021T2LP9A	121L8671	MLZ021T2LT9A	121L8739	
		3.5	24420	24390				MLZ026T2L*9	MLZ026T2LP9A	121L8673	MLZ026T2LT9A	121L8753	
		4	28700	29650	$\frac{7}{8} \times \frac{1}{2}$		81	MLZ030T2L*9	MLZ030T2LC9A	121L8675	MLZ030T2LQ9A	121L8765	
		5	34540	34080				MLZ038T2L*9	MLZ038T2LC9A	121L8677	MLZ038T2LQ9A	121L8777	
		6	41780	41960				MLZ045T2L*9	MLZ045T2LC9A	121L8679	MLZ045T2LQ9A	121L8797	
		7	45660	46300				$\frac{7}{8} \times \frac{3}{4}$	$1 \frac{1}{4} \times 1 \frac{1}{4}$	MLZ048T2L*9	MLZ048T2LC9A	121L8681	MLZ048T2LQ9A
		7.5	52500	54360	$1 \frac{1}{8} \times \frac{7}{8}$		$1 \frac{3}{4} \times 1 \frac{1}{4}$	97	MLZ058T2L*9	MLZ058T2LC9A	121L8683	MLZ058T2LQ9A	121L8817
		9	61980	62730				99	MLZ066T2L*9	MLZ066T2LC9A	121L8685	MLZ066T2LQ9A	121L8827
	10	69970	67600	MLZ076T2L*9		MLZ076T2LC9A			121L8687	MLZ076T2LQ9A	121L8835		
	4: 380–415V/3/50Hz & 460V/3/60Hz	2	13720	13900	$\frac{3}{4} \times \frac{1}{2}$	$1 \frac{1}{4} \times 1$	68	MLZ015T4L*9	MLZ015T4LP9A	121L8629	MLZ015T4LT9A	121L8713	
		2.5	18420	18340				MLZ019T4L*9	MLZ019T4LP9A	121L8725	MLZ019T4LT9A	121L8727	
		3	19720	19510				MLZ021T4L*9	MLZ021T4LP9A	121L8633	MLZ021T4LT9A	121L8741	
		3.5	24420	24390				MLZ026T4L*9	MLZ026T4LP9a	121L8637	MLZ026T4LT9A	121L8755	
		4	28700	29650	$\frac{7}{8} \times \frac{1}{2}$	81	MLZ030T4L*9	MLZ030T4LC9A	121L8641	MLZ030T4LQ9A	121L8767		
		5	34540	34080			MLZ038T4L*9	MLZ038T4LC9A	121L8645	MLZ038T4LQ9A	121L8779		
		6	41780	41960			MLZ045T4L*9	MLZ045T4LC9A	121L8649	MLZ045T4LQ9A	121L8799		
		7	45660	46300			$\frac{7}{8} \times \frac{3}{4}$	$1 \frac{1}{4} \times 1 \frac{1}{4}$	MLZ048T4L*9	MLZ048T4LC9A	121L8651	MLZ048T4LQ9A	121L8809
		7.5	52500	54360	$1 \frac{1}{8} \times \frac{7}{8}$	$1 \frac{3}{4} \times 1 \frac{1}{4}$	97	MLZ058T4L*9	MLZ058T4LC9A	121L8653	MLZ058T4LQ9A	121L8819	
		9	61980	62730			99	MLZ066T4L*9	MLZ066T4LC9A	121L8657	MLZ066T4LQ9A	121L8829	
		10	69970	67600				MLZ076T4*L9	MLZ076T4LC9A	121L8655	MLZ076T4LQ9A	121L8837	

Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Terminal cover, spade terminals (round)	All	120Z5015
Terminal cover, screw terminals (square)		120Z5018
Mounting kit for 1 compressor: 4 grommets, 4 sleeves, 4 bolts, 4 washers		120Z0661
Discharge thermostat kit		7750009
POE lubricant, 215 PZ (RL46HB); 1 liter can	MLZ015–026	120Z0648
Belt type crankcase heater: 65W, 230V		120Z5040
Belt type crankcase heater: 55/70W, 460V		120Z5041
Belt type crankcase heater: 65W, 230V	MLZ030–076	120Z0059
Belt type crankcase heater: 70W, 460V		120Z5012


LLZ - Low Temperature Scroll Compressors

Danfoss LLZ scroll compressors for low temperature applications are dedicated to commercial and light commercial refrigeration applications.

LLZ Scroll Compressors



Nomenclature / Model No.

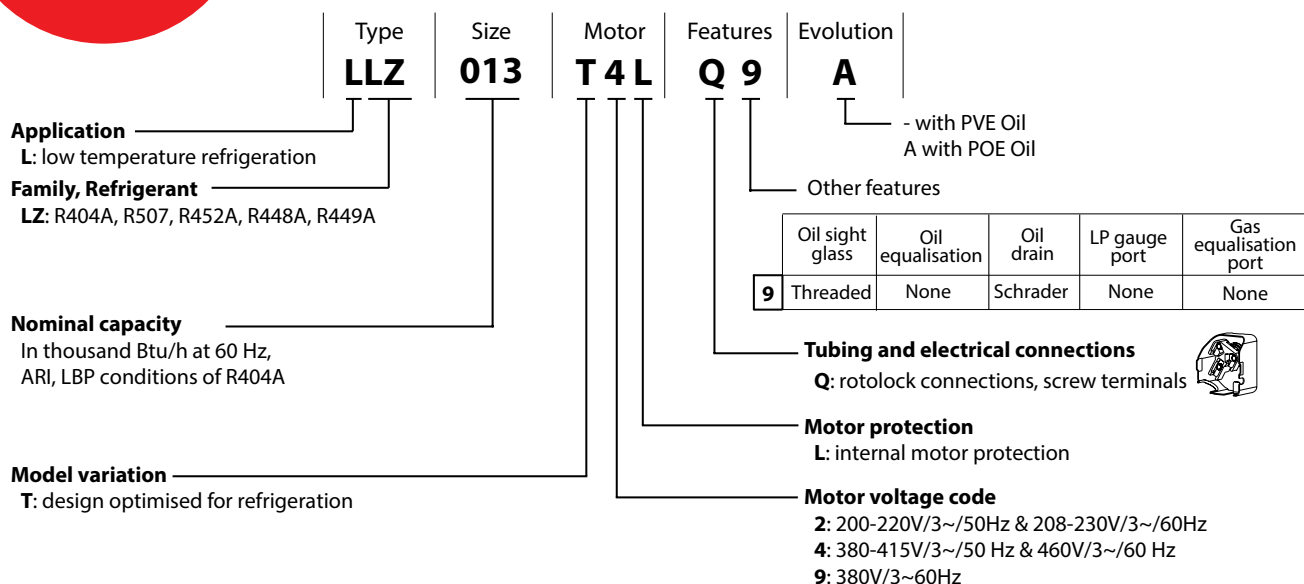

Technical data and ordering

LLZ - Medium Temperature Scroll Compressors

Refrigerant	Voltage/Phase/Frequency	Tons (approx.)	Nominal capacity (BTU/h)			Solder ODF connection (in.)	Weight (lbs.)	OLD Danfoss Model	Danfoss Model (Rotolock)	
			R-404A	R-448A	R-449A			Danfoss Model No.	Danfoss Model No.	Danfoss Code No.
R-404A, R-448A, R-449A, R-452A	2: 200-220V/3/50Hz & 208-230V/3/60Hz	4	12650	10680		1 x 1	92	LLZ013T2Q9	LLZ013T2TQ9A	121L9545
		5	15470	13210			92	LLZ015T2Q9	LLZ015T2TQ9A	121L9547
		6	18420	15790			95	LLZ018T2Q9	LLZ018T2TQ9A	121L9549
		8	22990	19490			101	LLZ024T2Q9	LLZ024T2TQ9A	121L9551
		10	32110	27500			112	LLZ034T2Q9	LLZ034T2TQ9A	121L9553
	4: 380-415V/3/50Hz & 460V/3/60Hz	4	12650	10680		1 x 1	92	LLZ013T2Q9	LLZ013T4TQ9A	121L9535
		5	15470	13210			92	LLZ015T2Q9	LLZ015T4TQ9A	121L9537
		6	18420	15790			95	LLZ018T2Q9	LLZ018T4TQ9A	121L9539
		8	22990	19490			101	LLZ024T2Q9	LLZ024T4TQ9A	121L9541
		10	32110	27500			112	LLZ034T2Q9	LLZ034T4TQ9A	121L9543

¹ Evaporating temperature = -25 °F, Condensing temperature = 105 °F, Superheat = 20 °F, Subcooling = 0 °F

Spare Parts and Accessories

Description	Type(s) applied to	Danfoss Code No.
Terminal cover, screw terminals (square)	All	120Z5018
Discharge thermostat kit		7750009
POE lubricant, 215 PZ (RL46HB); 1 liter can		120Z0648
Belt crankcase heater: 70W, 230V		120Z5040
Belt crankcase heater: 70W, 460V		120Z5041
Mounting kit for 1 compressor: (4) grommets, (4) sleeves, (4) bolts, (4) washers	LLZ013-018	120Z0662
Mounting kit for 1 compressor: (4) grommets, (4) sleeves, (4) bolts, (4) washers	LLZ024-034	120Z0663

Capacitors and Relays

Danfoss Models	Start capacitor (μF)	Start capacitor voltage (V)	Run capacitor (μF)	Run capacitor voltage (V)	Start relay Model No.	Start relay Code No.
MT/MTZ18 JA-1	100	330	25	440	RVA 6AMKL (Electrica)	8173022
MT/MTZ22 JC-1	100		45			
MT/MTZ28 JE-1	135		50			
MT/MTZ32 JF-1	100		45			
MT/MTZ36 JG-1	100		55			
MT/MTZ40 JH-1	100		45			
MT/MTZ44 HJ-1	135		55			
MT/MTZ50 HK-1	135		45			
MT/MTZ56 HL-1	200		55			
MT/MTZ64 HM-1	235		25			
NTZ048A1LR1A	100	330	50	370	RVA 6AMKL (Electrica)	8173022
NTZ068A1LR1A	135		45			
NTZ096A1LR1A	135		60			
NTZ108A1LR1A	135		70			
NTZ136A1LR1A	135		55			
HRM025	145–175	250	55	440	RVA 2ACKO (Electrica)	120Z0396
HRM032-034	145–175		60		RVA 2ABKO (Electrica)	120Z0397
HRM038	88–108		70		RVA 2AB3D (Electrica)	120Z0397
HRM040-045	88–108		55		RVA 2ABKO (Electrica)	120Z0397
HRM047	88–108		80		RVA 2AB3D (Electrica)	120Z0397
HRM048	161–193	330	70	370	RVA 2ABKO (Electrica)	120Z0397
HRM051-054	161–193		55		RVA 2AB3D (Electrica)	120Z0397
HRM058T1-060T1	88–108		80		RVA A4IKL (Electrica)	120Z0398
HRM058U1-060U1, HLM068-081	189–227		45		RVA 2ABKO (Electrica)	120Z0397
HRP051	161–193		50		RVA 2ACKO (Electrica)	120Z0396
HLP068-081	189–227	250	55	440	RVA 2ABKO (Electrica)	120Z0397
HRH031	145–175		60		RVA 9CKO (Electrica)	120Z0393
HRH032-034	88–108		70		RVA 2ABKO (Electrica)	120Z0397
HRH036	88–108		80		RVA 2ABKO (Electrica)	120Z0397
HRH038-040	88–108		55		RVA 2ABKO (Electrica)	120Z0397
HRH041-051	161–193	330	45	370	RVA 2ABKO (Electrica)	120Z0397
HRH054-056, HLH068, HLJ072-083	189–227		50		RVA 2ABKO (Electrica)	120Z0397
MLZ015	145–175		55		RVA 2ABKO (Electrica)	120Z0397
MLZ019	145–175		60		RVA 2ABKO (Electrica)	120Z0397
MLZ021	145–175		70		RVA 2ABKO (Electrica)	120Z0397
MLZ026	88–108	250	55	440	RVA 2ABKO (Electrica)	120Z0397
MLZ030	161–193		60		RVA 2ABKO (Electrica)	120Z0397
MLZ038	88–108		70		RVA 2ABKO (Electrica)	120Z0397

Code Number Index

Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)
7703004	64	003N8006	31	023Z0013	35	032F8196	29
7703005	64, 66	003N8025	31	023Z0014	35	032L0548	29
7703006	64, 66	009G7210	37	023Z0030	35	032L0550	29
7703009	64, 66	009G7211	37	023Z0031	35	032L0552	29
7750009	74	009G7212	37	023Z0032	35	032L0554	29
7754001	64, 71	009G7084	37	023Z0034	35	032L1004	29
7754002	64, 71	009G7085	37	023Z0036	35	032L1103	29
7765006	71	009G7086	37	023Z0105	35	032L1104	29
7765028	71–72	009G7087	37	023Z0106	35	032L1209	29
7773106	64, 66	009G7088	37	023Z1009	35	032L1212	29
7773107	64, 66, 71	009G7089	37	023Z1010	35	032L1214	29
7773108	64, 66, 71	009L7209	37	023Z1011	35	032L1228	29
7773109	64, 66, 71	009L7210	37	023Z1012	35	032L1240	29
7773110	64, 66, 71	009L7211	37	023Z1014	35	032L1254	29
7773112	71	009L7212	37	023Z1015	35	032L2207	29
7773117	64, 66, 71	009L8050	37	023Z1016	35	032L2208	29
7773118	64, 66, 71	009L8051	37	023Z1018	35	032L7116	29
7773121	71	009L8052	37	023Z1433	35	032L7121	29
7773122	71	009L8053	37	023Z1435	35	032L7137	29
7773123	71	009L8054	37	023Z1436	35	032L7144	29
7777045	71	009L8059	37	023Z1437	35	032L7145	29
8153004	64, 66	009L8065	37	023Z5000	35	032L7148	29
8153007	64, 66	009L8066	37	023Z5002	35	032L7149	29
8153008	64, 66	009L8067	37	023Z5003	35	034L0006	33
8153010	64, 66	009L8068	37	023Z5004	35	034L0023	33
8153011	64, 66	009L8069	37	023Z5006	35	034L0025	33
8153013	64, 66	014L0006	39	023Z5007	35	034L0026	33
8153122	64, 66	014L0145	39	023Z5008	35	034L0029	33
8153123	64, 66	014L0171	39	023Z5010	35	034L0032	33
8153124	64, 66	014L0172	39	023Z5013	35	034L0043	33
8154001	64, 66, 71	014L0173	39	023Z5018	35	034L0045	33
8156001	64, 66	014L0181	39	023Z5019	35	034L0046	33
8156007	64, 66	014L0182	39	023Z5022	35	034L0049	33
8156009	64	014L0183	39	023Z5023	35	034L0052	33
8156019	64, 66, 71	014L0186	39	023Z5026	35	034L0093	33
8156134	64, 66	018F0091	29	023Z5029	35	034L0094	33
8156135	64, 66, 71	018F4100	29	023Z5032	35	034L0095	33
8156138	71	018F4102	29	023Z5033	35	034L0097	33
8156139	71	018F4110	29	023Z5174	36	034L0100	33
8173022	77	018F4112	29	023Z5181	36	034L0143	33
003N0388	31	018F4120	29	023Z8255	35	034L0144	33
003N1810	31	018F4122	29	023Z8261	36	034L0147	33
003N2810	31	018F4180	29	032F0181	29	034N0082	33
003N3810	31	018F4181	29	032F0185	29	034N0083	33
003N4006	31	020-1132	33	032F0187	29	034N0084	33
003N4007	31	020B1010	38	032F0189	29	042H0165	29
003N4008	31	020B1011	38	032F0193	29	042H0172	29
003N4810	31	020B1012	38	032F1204	29	060-017166	25, 27, 31
003N5006	31	020B1018	38	032F1206	29	060-5231	25
003N5025	31	023U1392	35	032F2326	29	060-5232	25
003N6006	31	023U1921	35	032F2327	29	060-5233	25
003N6025	31	023U4381	35	032F3236	29	060-5234	25
003N7006	31	023U5381	35	032F8165	29	060-5235	25
003N7025	31	023Z0012	35	032F8166	29	060-5237	25

Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)
060-5239	25	067N6162	16	068U3507	7, 10, 14	114N3491	52, 54, 56, 58
060-5240	25	067N6166	16	068U4900	12	114N3492	52, 54, 56, 58
060-5241	25	067N6181	16	068U4901	12	114N3493	52, 54, 56, 58
060-5242	25	067N6186	16	068U7000	10	114N3494	52, 54, 56, 58
060-5243	25	067N6188	16	068U7001	7, 10	114N3495	52, 54, 56, 58
060-5244	25	067N9206	16	068Z3206	6	114N3496	52, 54, 56, 58
060-5245	25	067N9207	16	068Z3209	6	114N3497	52, 54, 56, 58
060-5246	25	067N9209	16	068Z3346	6	114N3498	52, 54, 56, 58
060-5247	25	067N9210	16	068Z3348	6	114N3499	52, 54, 56, 58
060-5248	25	067N9213	16	068Z3400	6	114N3500	52, 54, 56, 58
060-5249	25	067N9215	16	068Z3403	6	114N3501	53, 55, 57, 59
060-5250	25	067N9218	16	068Z7100	7	114N3502	53, 55, 57, 59
060-5253	25	067N9219	16	077Z7010	19	114N3508	60–61
060-5254	25	067N9284	16	077Z7011	19	114N3509	60–61
060B200266	27	067N9285	16	077Z7012	19	114N3511	60–61
060B200891	27	067N9403	16	077Z7013	19	114N3518	60–61
060B200391	27	067N9404	16	077Z7014	19	114N3519	52, 54, 56, 58
060B200791	27	067N9406	16	077Z7015	19	114N3520	53, 55, 57, 59
060B201291	27	067N9407	16	077Z7016	19	114N3521	53, 55, 57, 59
060B205091	27	067N9409	16	077Z7017	19	114N3522	53, 55, 57, 59
060B205391	27	067N9411	16	080G3411	17	114N3523	60–61
060B205491	27	067N9412	16	080G3412	17	114N3524	60–61
060B205791	27	067N9413	16	080G9741	17	114N3601	44, 46, 48–49
060L2150	21	067N9415	16	084N3210	17	114N3602	44, 46, 48–49
060L2151	21	067N9418	16	114N2017	44	114N3603	44, 46, 48–49
060L2152	21	067N9419	16	114N2019	44	114N3604	44, 46, 48–49
060L5201	23	067N9483	16	114N2022	44	114N3605	44, 46, 48–49
060L5203	23	068-2002	6	114N2023	44	114N3606	44, 46, 48–49
060L5206	23	068-2003	6	114N2025	44	114N3607	45–46, 48–49
060L5208	23	068-2006	6	114N2027	44	114N3608	45–46, 48–49
060L5215	23	068-2007	6	114N2028	44	114N3609	45–46, 48–49
060L5218	23	068-2008	6	114N2029	44	114N3610	45, 47–49
060L5223	23	068-2009	6	114N2316	46, 50	114N3611	45, 47–49
067L5856	14	068-2010	6	114N2318	46, 50	114N3612	45, 47–49
067L5857	14	068-2015	6	114N2321	46, 50	114N3614	45, 47–49
067L5858	14	068U0015	10	114N2324	46, 50	114N3615	45, 47–49
067L5859	14	068U0016	10	114N2325	46, 50	114N3616	45, 47–49
067L5955	14	068U1030	9	114N2328	46	114N3617	45, 47–49
067L5956	14	068U1031	9	114N2329	46	114N3618	45, 47–49
067L5957	14	068U1032	9	114N2330	46	114N3619	45, 47–49
067L7000	14	068U1033	9	114N2331	46	114N3621	45, 47–49
067L7001	14	068U1034	9	114N2332	46	114N3622	45, 47–49
067N0557	16	068U1035	9	114N2335	50	114N3623	45, 47–49
067N5158	16	068U1036	9	114N2336	50	114N3626	45, 47–49
067N5159	16	068U1037	9	114N2337	50	114N3627	45, 47–49
067N5163	16	068U1038	9	114N2338	50	114N3628	45, 47–49
067N5169	16	068U1039	9	114N2339	50	114N3629	45, 47–49
067N5254	16	068U1706	10	114N2389	50	114N3631	45, 47–49
067N5255	16	068U2205	9	114N3485	52, 54, 56, 58	114N3632	45, 47–49
067N6150	16	068U2207	9	114N3486	52, 54, 56, 58	114N3633	45, 47–49
067N6151	16	068U2235	9	114N3487	52, 54, 56, 58	114N3634	45, 47–49
067N6154	16	068U2237	9	114N3488	52, 54, 56, 58	114N3636	45, 47–49
067N6155	16	068U2285	9	114N3489	52, 54, 56, 58	114N3637	45, 47–49
067N6158	16	068U2287	9	114N3490	52, 54, 56, 58	114N3652	65–66

Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)
114N3653	65-66	120H0289	72	120U0401	68	120U8657	74
114N3654	65-66	120H0291	72	120U0601	68	120U8659	74
114N3655	65-66	120H0297	72	120U0766	68	120U8661	74
114N6725	50	120H0299	72	120U0906	68	120U8663	74
114N6726	50	120H0359	72	120U1391	69	120U8665	74
114N6727	50	120H0361	72	120U1396	69	120U8667	74
114N6729	50	120H0825	72	120U1401	69	120U8669	74
114N6730	50	120H0827	72	120U1481	68	120U8671	74
114N6731	50	120H0851	72	120U1486	68	120U8673	74
114N6733	50	120H0853	72	120U1491	68	120U8675	74
114N6734	50	120H1105	72	120U1766	68	120U8677	74
114N6735	50	120H1123	72	120U1781	68	120U8679	74
114N6737	50	120H1125	72	120U1916	68	120U8681	74
114N6738	50	120H1127	72	120U2014	68	120U8683	74
114N6739	50	120H1129	72	120U2052	69	120U8685	74
114N6741	50	120H1131	72	120U2062	69	120U8687	74
114N6742	50	120H1133	72	120U3098	68	120U8717	74
114N6744	50	120H1159	72	120U3276	68	120U8721	74
114N6745	50	120H1161	72	120U3307	68	120U8725	74
119F3965	14	120H1163	72	120U3308	68	120Z0039	71
119F3966	14	120H1165	72	120U3309	68	120Z0055	69
120F0226	65	120H1167	72	120U3310	68	120Z0056	69
120F0230	65	120H1169	72	120U3311	68	120Z0057	69
120F0234	65	120H1180	72	120U3312	68	120Z0058	69
120F0236	65	120H1182	72	120U3313	68	120Z0059	69, 74
120F0238	65	120H1188	72	120U3314	68	120Z0060	69
120F0240	65	120H1190	72	120U3315	68	120Z0066	71
120F0242	65	120H1196	72	120U3316	68	120Z0125	71-72
120F0279	65	120H1198	72	120U3317	68	120Z0164	71
120F0280	65	120H1204	72	120U3318	68	120Z0165	71
120F0281	65	120H1206	72	120U3319	68	120Z0393	77
120F0282	65	120H1212	72	120U3320	68	120Z0396	77
120F0283	65	120H1214	72	120U3321	69	120Z0397	77
120F0284	65	120H1220	72	120U3322	69	120Z0398	77
120F0285	65	120H1222	72	120U3323	69	120Z0405	71-72
120F0293	65	120H1281	72	120U3324	69	120Z0413	71
120F0294	65	120H1283	72	120U3325	69	120Z0458	71
120F0295	65	120H1285	72	120U3326	69	120Z0464	64, 66, 71
120F0296	65	120H1287	72	120U3327	69	120Z0466	64, 66, 71
120F0297	65	120H1289	72	120U3328	69	120Z0504	72
120H0001	72	120H1291	72	120U3329	69	120Z0584	71
120H0003	72	120H1317	72	120U3330	69	120Z0585	71
120H0011	72	120H1319	72	120U3331	69	120Z0638	64
120H0013	72	120H1321	72	120U3332	69	120Z0648	74, 76
120H0021	72	120H1323	72	120U3333	69	120Z0661	74
120H0023	72	120H1325	72	120U8629	74	120Z0662	76
120H0151	72	120H1327	72	120U8633	74	120Z0663	76
120H0152	72	120H1329	72	120U8637	74	120Z5012	74
120H0199	72	120H1331	72	120U8641	74	120Z5015	69, 74
120H0201	72	120H1344	72	120U8645	74	120Z5018	69, 74
120H0209	72	120H1378	72	120U8649	74	120Z5034	69
120H0211	72	120H1380	72	120U8651	74	120Z5040	69, 74
120H0253	72	120H1460	72	120U8653	74	120Z5041	69, 74
120H0255	72	120U0376	68	120U8655	74	120Z5056	69

Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)	Danfoss Code No.	Page(s)
120Z5057	69	123B1550	42	MT40-4VI	63	MTZ72-3VI	63
120Z5064	69	123B1553	42	MT44-1VI	63	MTZ72-4VI	63
121L5001	69	123B1572	42	MT44-3VI	63	MTZ80-3VI	63
121L5003	69	123B1575	42	MT44-4VI	63	MTZ80-4VI	63
121L5009	69	123B1580	42	MT50-1VI	63	PTC	64, 66
121L5011	69	123B1584	42	MT50-3VI	63	SM090-3VI	71
121L5017	69	123B1588	42	MT50-4VI	63	SM090-4VI	71
121L5019	69	123B1590	42	MT56-1VI	63	SM115-3QAI	71
121L9535	76	123B1601	42	MT56-3VI	63	SM115-4QAI	71
121L9537	76	123B1714	42	MT56-4VI	63	SM125-3QAI	71
121L9539	76	123B2131	41	MT64-1VI	63	SM125-4QAI	71
121L9541	76	123B2143	41	MT64-3VI	63	SM160-3CBI	71
121L9543	76	123B2144	41	MT64-4VI	63	SM160-4CBI	71
121L9545	76	123B2146	41	MT72-3VI	63	SM175-3QAI	71
121L9547	76	123B2152	41	MT72-4VI	63	SM175-4QAI	71
121L9549	76	123B2155	41	MT80-3VI	63	SM185-3QAI	71
121L9551	76	123B2157	41	MT80-4VI	63	SM185-4QAI	71
121L9553	76	123B2160	41	MTZ100-3VI	63	SZ090-3VI	71
121U8708	74	123B2174	41	MTZ100-4VI	63	SZ090-4VI	71
121U8710	74	123B2186	41	MTZ125-3VI	63	SZ115-3QAI	71
121U8712	74	123B2527	42	MTZ125-4VI	63	SZ115-4QAI	71
121U8718	74	123B2530	42	MTZ144-3VI	63	SZ125-3QAI	71
121U8722	74	123B2541	42	MTZ144-4VI	63	SZ125-4QAI	71
121U8726	74	123B2542	42	MTZ160-3VI	63	SZ160-3CBI	71
121U8736	74	123B2543	42	MTZ160-4VI	63	SZ160-4CBI	71
121U8738	74	123B2545	42	MTZ18-1VI	63	SZ175-3QAI	71
121U8740	74	123B2714	42	MTZ18-3VI	63	SZ175-4QAI	71
121U8750	74	123B8110	41	MTZ18-4VI	63	SZ185-3QAI	71
121U8752	74	123B8126	42	MTZ22-1VI	63	SZ185-4QAI	71
121U8754	74	MT100-3VI	63	MTZ22-3VI	63		
121U8762	74	MT100-4VI	63	MTZ22-4VI	63		
121U8764	74	MT125-3VI	63	MTZ28-1VI	63		
121U8774	74	MT125-4VI	63	MTZ28-3VI	63		
121U8776	74	MT144-3VI	63	MTZ28-4VI	63		
121U8778	74	MT144-4VI	63	MTZ32-1VI	63		
121U8796	74	MT160-3VI	63	MTZ32-3VI	63		
121U8798	74	MT160-4VI	63	MTZ32-4VI	63		
121U8806	74	MT18-1VI	63	MTZ36-1VI	63		
121U8808	74	MT18-3VI	63	MTZ36-3VI	63		
121U8816	74	MT18-4VI	63	MTZ36-4VI	63		
121U8818	74	MT22-1VI	63	MTZ40-1VI	63		
121U8826	74	MT22-3VI	63	MTZ40-3VI	63		
121U8828	74	MT22-4VI	63	MTZ40-4VI	63		
121U8834	74	MT28-1VI	63	MTZ44-1VI	63		
121U8836	74	MT28-3VI	63	MTZ44-3VI	63		
123B1161	41	MT28-4VI	63	MTZ44-4VI	63		
123B1163	41	MT32-1VI	63	MTZ50-1VI	63		
123B1301	41	MT32-3VI	63	MTZ50-3VI	63		
123B1303	41	MT32-4VI	63	MTZ50-4VI	63		
123B1304	41	MT36-1VI	63	MTZ56-4VI	63		
123B1311	41	MT36-3VI	63	MTZ64-1VI	63		
123B1313	41	MT36-4VI	63	MTZ64-3VI	63		
123B1528	42	MT40-1VI	63	MTZ64-4VI	63		
123B1548	42	MT40-3VI	63				

REFRIGERATION & AIR CONDITIONING

Automatic Controls | Condensing Units | Compressors

80 years

The industry's widest
expertise at your
disposal. We've been
looking ahead since
1933.



Danfoss can accept no responsibility for possible errors in catalogs, brochures, and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.