

REFRIGERATION PRODUCTS

STRAINERS

FEATURES:

- Outlet dimensions of 0.093 to 3/8"
- Inlet dimensions of 1/4" to 3/8"
- Equipped with S.S. mesh screen
- Available with 1, 2, 3 and 4 outlets

STRAINERS

PART NO	INLET	OUTLET	NO. OF OUTLETS	LENGTH
SS862	3/8"	0.146 in	2	3"
SS962	3/8"	0.146 in	3	4"
SS963	3/8"	0.146 in	4	5"



SS963



SS962



SS862

SPUN COPPER DRIERS

DESIGNED TO REMOVE MOISTURE AND ACID FROM REFRIGERANT. ALSO CONTAINS S.S. SCREEN TO TRAP FOREIGN MATTER IN REFRIGERANT.

FEATURES:

- SE804 copper tube may be cut, swaged or bent to accommodate application
- Compatible with most new blend refrigerants
- Use XH-9 desiccant

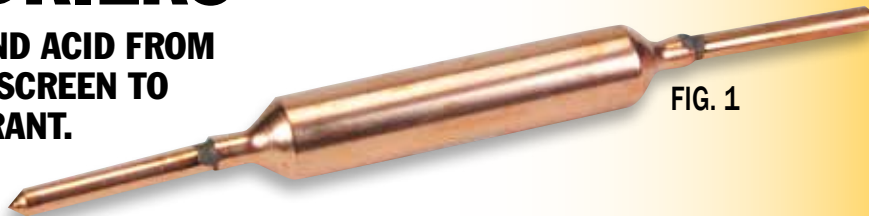


FIG. 1



FIG. 2

SPUN COPPER DRIERS

PART NO	SWEAT CONN.	DESICCANT GRAMS	DIAMETER	LENGTH	FIG.
SE15	1/4" x 1/4"	15	3/4"	9 1/4"	1
SE25	1/4" x 1/4"	25	1"	9"	1
SE30	1/4" x 1/4"	30	1"	9 1/2"	1

PART NO	SWEAT CONN.	DESICCANT GRAMS	RECOMMENDED TONNAGE				
			R12		R22		Fig.
			75°F	125°F	75°F	125°F	
SE804	1/4" x 1/4"	10	1/2	1/2	1/2	1/3	1
SEX5	1/4" x 1/4"	10	1	1	1 1/2	3/4	2